



SYSTEM™

OPERATING MANUAL ATA PACKAGE



This page is intentionally blank.

Thank you from CoachComm!

We at CoachComm want to thank you for purchasing an X-System Sideline Communications System. We have made every effort to build a reliable, intuitive communication system that provides the functionality that you can count on come game day.

One of our goals in the design of X-System was to build on the advances set forth by the previous Tempest® NG System and to provide users with unmatched RF performance. You will be able to begin using your new X-System with nothing more than the Game Day Guide. However, to fully benefit from the available features, please read this manual carefully.

We want X-System to make your job easier and your game day experience positive. To successfully familiarize yourself with the many diverse and powerful features X-System offers, it is crucial that you acquaint yourself with the manual.

We are committed to providing you with a high quality product that will deliver years of trouble free service. Should you experience any problem with your X-System equipment, whether it is under warranty or not, we will do our best to take care of your needs.

Thank you for choosing CoachComm for your sideline communication needs.

CoachComm LLC
205 Technology Parkway
Auburn, AL 36830
Phone: 334-321-2300
Fax: 888-329-2658
www.coachcomm.com

© 2018–2019 CoachComm LLC. All rights reserved.
Document Reference: 2019.07 D0000394_C

© Telex is a registered trademark of Telex Communications, Inc.
© Audiocom is a registered trademark of Bosch Security Systems, Inc.

Table of Contents

Safety Information	1
Electrical Safety.....	1
Radio Pack (RP) Battery Safety	1
Transportation Safety.....	2
Protecting Yourself and Those Around You	2
Introduction	3
What Makes X-System So Different?	3
Frequency Considerations.....	3
Stadium Wiring Considerations	4
Block Diagrams	5
Sideline to Wired Press Box Unit (System Diagram).....	5
Wired Press Box Unit Block Diagram	6
Sideline Trunks Block Diagram	7
X-System Components	12
Sideline Trunks Overview.....	12
Wired Press Box Unit Overview	14
PS-4001 Power Supply(s)	14
Wired Interface Module (WIM).....	15
Ringdown Circuits	17
Wired Assignment Module (WAM)	18
Sideline Trunk Data and Power Management	20
Wireless Trunk Rear Patch Panel.....	20
Control Unit (XCU-44).....	21
Radio Transceivers (XRT-900 and XRT-2400)	25
Radio Packs (XRP-13)	27
System Accessories	34
Wired BeltPacks	34
(AudioCom® by Telex®)	34
Field and Press Box Cables.....	34
Headsets	35
System Configuration File	36
Saving a System Configuration File.....	36
Uploading a Configuration File	37
Home Screen.....	40
RP Icon.....	41
Profile Screen.....	42
Additional System Views.....	44
X-Ware Advanced Settings.....	47
System Setup and Operation.....	54
RT Mast Assembly	54
Setting Home/Away Status	56
Turning On 2-Wire Ports and Adjusting Levels.....	56
Assigning Conferences to Dry Pair Connections (Wired Port)	57
Assign Profiles from the Control Unit.....	57
Auto Null Process	58
Walk Testing Your System	59
System Maintenance	60

Basic Maintenance	60
Lithium-Polymer Battery Maintenance	60
Installing and Updating X-Ware	61
Updating Device Firmware	64
Troubleshooting Common Issues	66
Product Support	67
Returning Equipment for Repair or Maintenance	67
License Information	68
Radio Device License Information	68
Non-Radio-Device License Information	69
X-Ware™ End User License Agreement (EULA)	70
Warranty Information	73
Limited Warranty	73
Parts Limited Warranty	73
Glossary	74
Specifications	75
Sideline Trunk Specifications	75
Mast and RT Case Specifications	75
Radio Transceiver Specifications	77
Radio Pack Specifications	78
Appendix A: Wireless Press Box Unit	79
Sideline to Wireless Press Box Unit (System Diagram)	79
Wireless Press Box Unit Block Diagram	80
Wireless Press Box Unit Overview	81
Using Fiber with Wireless Press Box (with Dry Pair and Wired Backup)	83
Using Dry Pair with Wireless Press Box (with Wired Backup)	84

This page is intentionally blank.

Safety Information

The following pages detail important safety information related to the ownership and operation of CoachComm's X-System. Please ensure all personnel review the warnings and safety recommendations included in this document before operating or transporting the X-System trunks in order to prevent equipment damage and/or serious personal injury.

Throughout this document you will see the following indicators for important safety information and alerts:



WARNING: Ignoring these warnings may cause permanent or serious injury or death as a result of incorrect operation.



CAUTION: Ignoring these cautions may cause moderate injury or property damage as a result of incorrect operation.

Electrical Safety



WARNING: ELECTRIC SHOCK RISK

- » Do not submerge any part of X-System in water.
- » Refer all servicing to qualified service personnel. Do not attempt to modify, disassemble, or open any X-System components. Exposing the electrical system may result in equipment damage and serious personal injury, including electric shock. Equipment damage caused by unqualified personnel may void the product warranty associated with your X-System.



CAUTION: SYSTEM DAMAGE RISK

- » Protect the power cords from foot traffic. Do not allow cords to be crimped or pinched, particularly at plugs, electrical outlets, and the point they exit from the apparatus. Routinely inspect power cords for any signs of fray or extensive wear. Immediately replace any damaged cords.
- » Keep all ventilation openings clean and unobstructed. Failure to do so could cause the system to overheat, which could cause personal injury or property damage.
- » Unplug X-System during lightning storms to prevent power surges that could damage electrical components or cause fire.

At a minimum, the X-System sideline trunks require one dedicated 15A 120VAC circuit. You should test and verify that any circuits are working properly on a routine basis.

Radio Pack (RP) Battery Safety



WARNING: EXPLOSION AND FIRE RISK

- » Battery explosion is possible if incorrect type is used. Use only batteries approved for use with X-System Radio Packs. If powering the Radio Pack with AA batteries, use only alkaline or carbon-zinc batteries.
- » Do not leave the battery unattended while charging. Immediately unplug unit if battery begins to swell or emit smoke while charging. If battery bursts or chemicals begin to leak out of battery housing, the chemicals will react with the air and cause a fire.
- » CoachComm recommends keeping a Class-D fire extinguisher available when charging lithium-polymer batteries. The chemicals inside lithium-polymer batteries are highly flammable.
- » Do not allow batteries to overheat (reach temperatures of above 140 degrees Fahrenheit).

- » Batteries that appear swollen, deformed, or damaged, or that do not fit properly should never be used. Properly dispose of any batteries in this condition in accordance with the instructions provided by your local authorities. For more information and local drop-off sites, visit <http://www.call2recycle.org/>.

Transportation Safety

When transporting your X-System trunks in a truck, follow the safety instructions below to prevent damage to your system or nearby equipment.



CAUTION: SYSTEM DAMAGE RISK

- » Do not leave trunks connected with the mast bracket while traveling.
- » Protect the corners and edges of your trunks by padding them with cardboard.
- » Use straps or other method to secure all trunks to prevent movement, side to side, and up and down.
- » Stop often to check your load.

Protecting Yourself and Those Around You

Allow only responsible individuals who are familiar with these general safety rules and operating instructions to use your X-System. Never allow people unfamiliar with these rules and instructions to set up or operate your system.



CAUTION: SYSTEM DAMAGE AND INJURY RISK

- » Never, under any conditions, remove, bend, cut, fit, weld, or otherwise alter standard parts of the X-System. Modifications to your system could cause personal injuries and property damage and will void your warranty.
- » Only use attachments/accessories/cables/hardware provided by the manufacturer.
- » Do not remove or cover any safety labels on the X-System components. If a label is damaged or removed, contact a CoachComm support technician for a replacement.

Introduction

What Makes X-System So Different?

CoachComm has been building and providing wired and wireless systems for over 25 years to supply quality communications to D-1 teams nationwide. Therefore, CoachComm's knowledge of wireless technology in the D-1 football arena is vast, and our experience is deep. When it came time to build the next generation of equipment to service that industry—CoachComm was up to the challenge.

X-System makes use of the newest available communications technology and meets our customers' demands for more users, better audio, and future-based features.

X-System is the first wireless intercom system to innovate the following unique features:

- Better Frequency-Hopping Spread Spectrum performance in domes
- Enhanced 900MHz and 2.4GHz band wireless performance
- X-Ware touch screen user interface for greater visibility and control of the system
- State-of-the-art rugged and stable Sideline Trunk design
- Better 7k audio quality

These features come together to form a powerful product called X-System. X-System, together with enhanced tools for the wired portion of the system, makes for an incredibly robust, easy to operate system.

Frequency Considerations

900MHz and 2.4GHz

CoachComm designed the new X-System to operate seamlessly in both the 900MHz and the 2.4GHz frequency bands. This allows multiple devices to operate within the bands with minimal interference or reduction of range and performance.

The 2.4GHz ISM frequency band is a globally accepted portion of the RF spectrum that is available for unlicensed use virtually anywhere worldwide with no frequency coordination. In the United States, the 2.4GHz band is 2400–2483.5 MHz. X-System utilizes up to 83 MHz of this spectrum from 2400–2483 MHz.

The 900MHz ISM frequency band is a portion of the RF spectrum available for unlicensed use in North America and other various locations with no frequency coordination. In North America the 900MHz band is 902–928 MHz. X-System utilizes up to 26 MHz of this spectrum.

Frequency-Hopping Spread Spectrum

Frequency-Hopping Spread Spectrum (FHSS) is a means of RF transmission. In FHSS, the signal hops to various frequencies—hence the name. In doing so, it spreads the data (voice in our case) across a wide area of the RF spectrum. Devices such as those in X-System collide constantly with other devices in that frequency spectrum and must have mechanisms built into their protocol to allow for data redundancy to provide acceptable user performance.

Stadium Wiring Considerations

Twisted Copper with RJ-14 Connector

We recommend an uninterrupted run of Cat 3 UTP cable from sideline to press box (for both home and visitor). By definition, each RJ-14 connector has two pairs (i.e., four wires). It is often confused with an RJ-11 (two wires). Some phone technicians will call these RJ-11 4-wire jacks.

Specifications:

Max Distance	≤ 3000 ft. (914.4 m)
Connector Type	RJ-14
Wire Type	Cat 3 UTP (unshielded twisted pair) copper phone line (At least 12 pairs required, though we recommend 24 pairs in order to have a full backup set.) Each RJ-14 connection consists of 2 pairs wired.
Wire Size	22 to 24 AWG

Please note the unique wiring of the RJ-14 for the “NG” application in Figure 1.

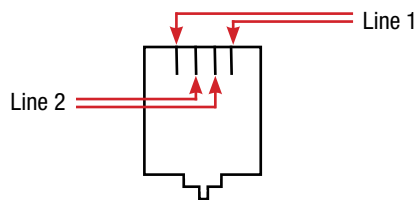


Figure 1: RJ-14 Wiring

CoachComm System (RJ-14 Connections)	Stadium Wiring (RJ-14 Connections)
Lines 1/2	Pairs 1 and 2
Lines 3/4	Pairs 3 and 4
Lines 5/6	Pairs 5 and 6
Lines 7/8	Pairs 7 and 8
Ground 1/Ground 2	Pairs 9 and 10
Ringdown 1/Ringdown 2	Pairs 11 and 12

Fiber-Optic Cable

Requirements for use with X-System Wireless Press Box Unit

For stadium wiring, CoachComm recommends an uninterrupted run of at least eight strands of single-mode optical fiber (SMF) cable from sideline to press box (for both home and visitor). We require at least four strands for X-System operation, so strands beyond those would be spares.

The X-System™ Sideline Cart, ATA package, and Wireless Press Box systems contain Neutrik OpticalCon Duo panel connectors and cables. (Neutrik OpticalCon Duo Connectors are ruggedized pass-through connectors compatible with standard LC duplex terminated fiber cable.) For ease-of-use, CoachComm recommends using Neutrik OpticalCon Duo Chassis Connectors for field and press box stadium termination.

Specifications:

Max Distance	≤ 10 km (6.2 miles)
Fiber Type	9/125 μm Single-Mode Fiber (SMF) strands (At least 4 strands required, though we recommend 8 strands in order to have a full backup set.) Each LC duplex connection consists of 1 pair (i.e., 2 strands).
Connector Type	LC duplex pair into Neutrik OpticalCon Duo
Stadium Termination	At least 2 separate Neutrik OpticalCon Duo Chassis Connectors in each location—press box and sideline.



Figure 2: Figure 2: Single-Mode Fiber (2 Strands) and Duplex LC Termination



Figure 3: Figure 3: Neutrik opticalCON DUO Cable Connector



Figure 4: Figure 4: Neutrik opticalCON DUO Chassis Connector

Block Diagrams

The following pages contain block diagrams that represent the principal parts of X-System and their relationships.

Sideline to Wired Press Box Unit (System Diagram)

See page 14 for more information about the Wired Press Box Unit. See page 20 for more information about the Wireless Trunk Patch Panel.

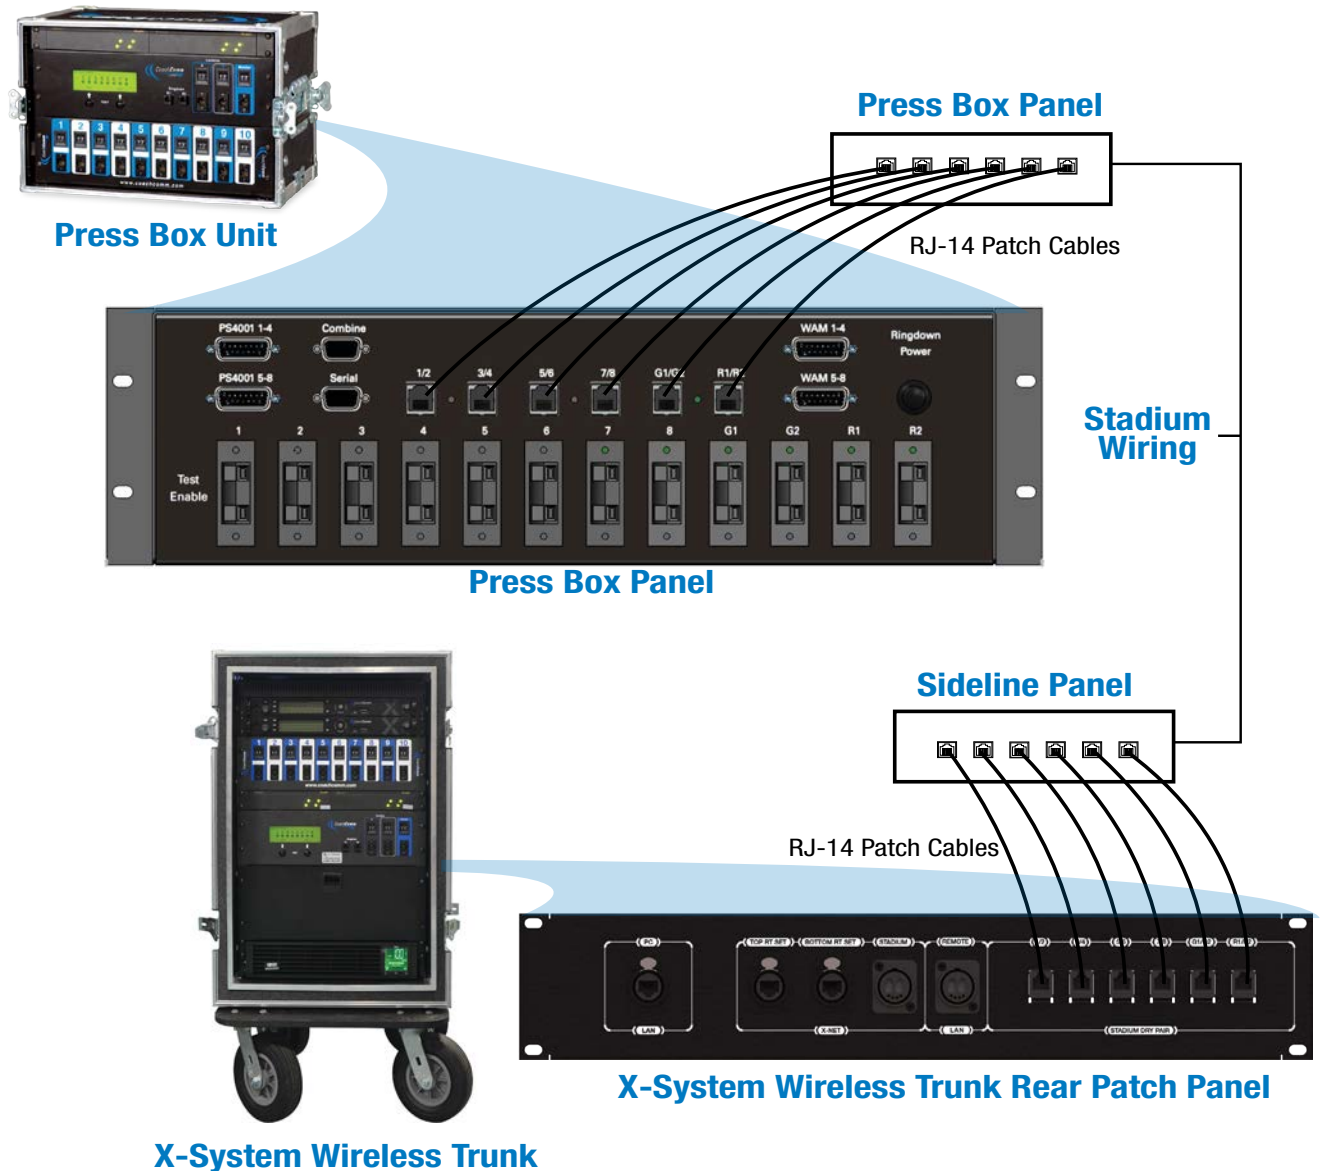


Figure 5: Sideline to Wired Press Box Unit (System Diagram)

Wired Press Box Unit Block Diagram

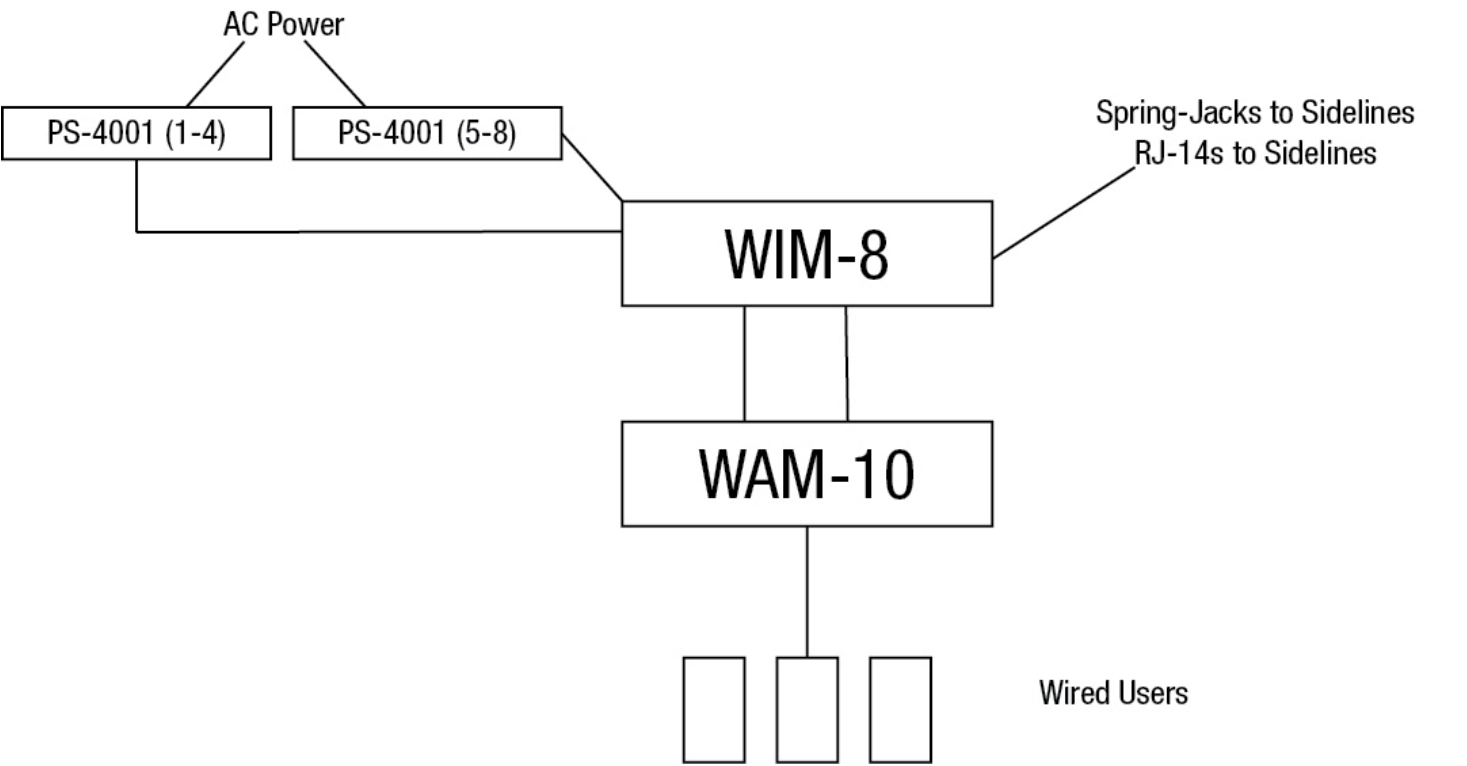


Figure 6: Wired Press Box Unit Block Diagram

Sideline Trunks Block Diagram

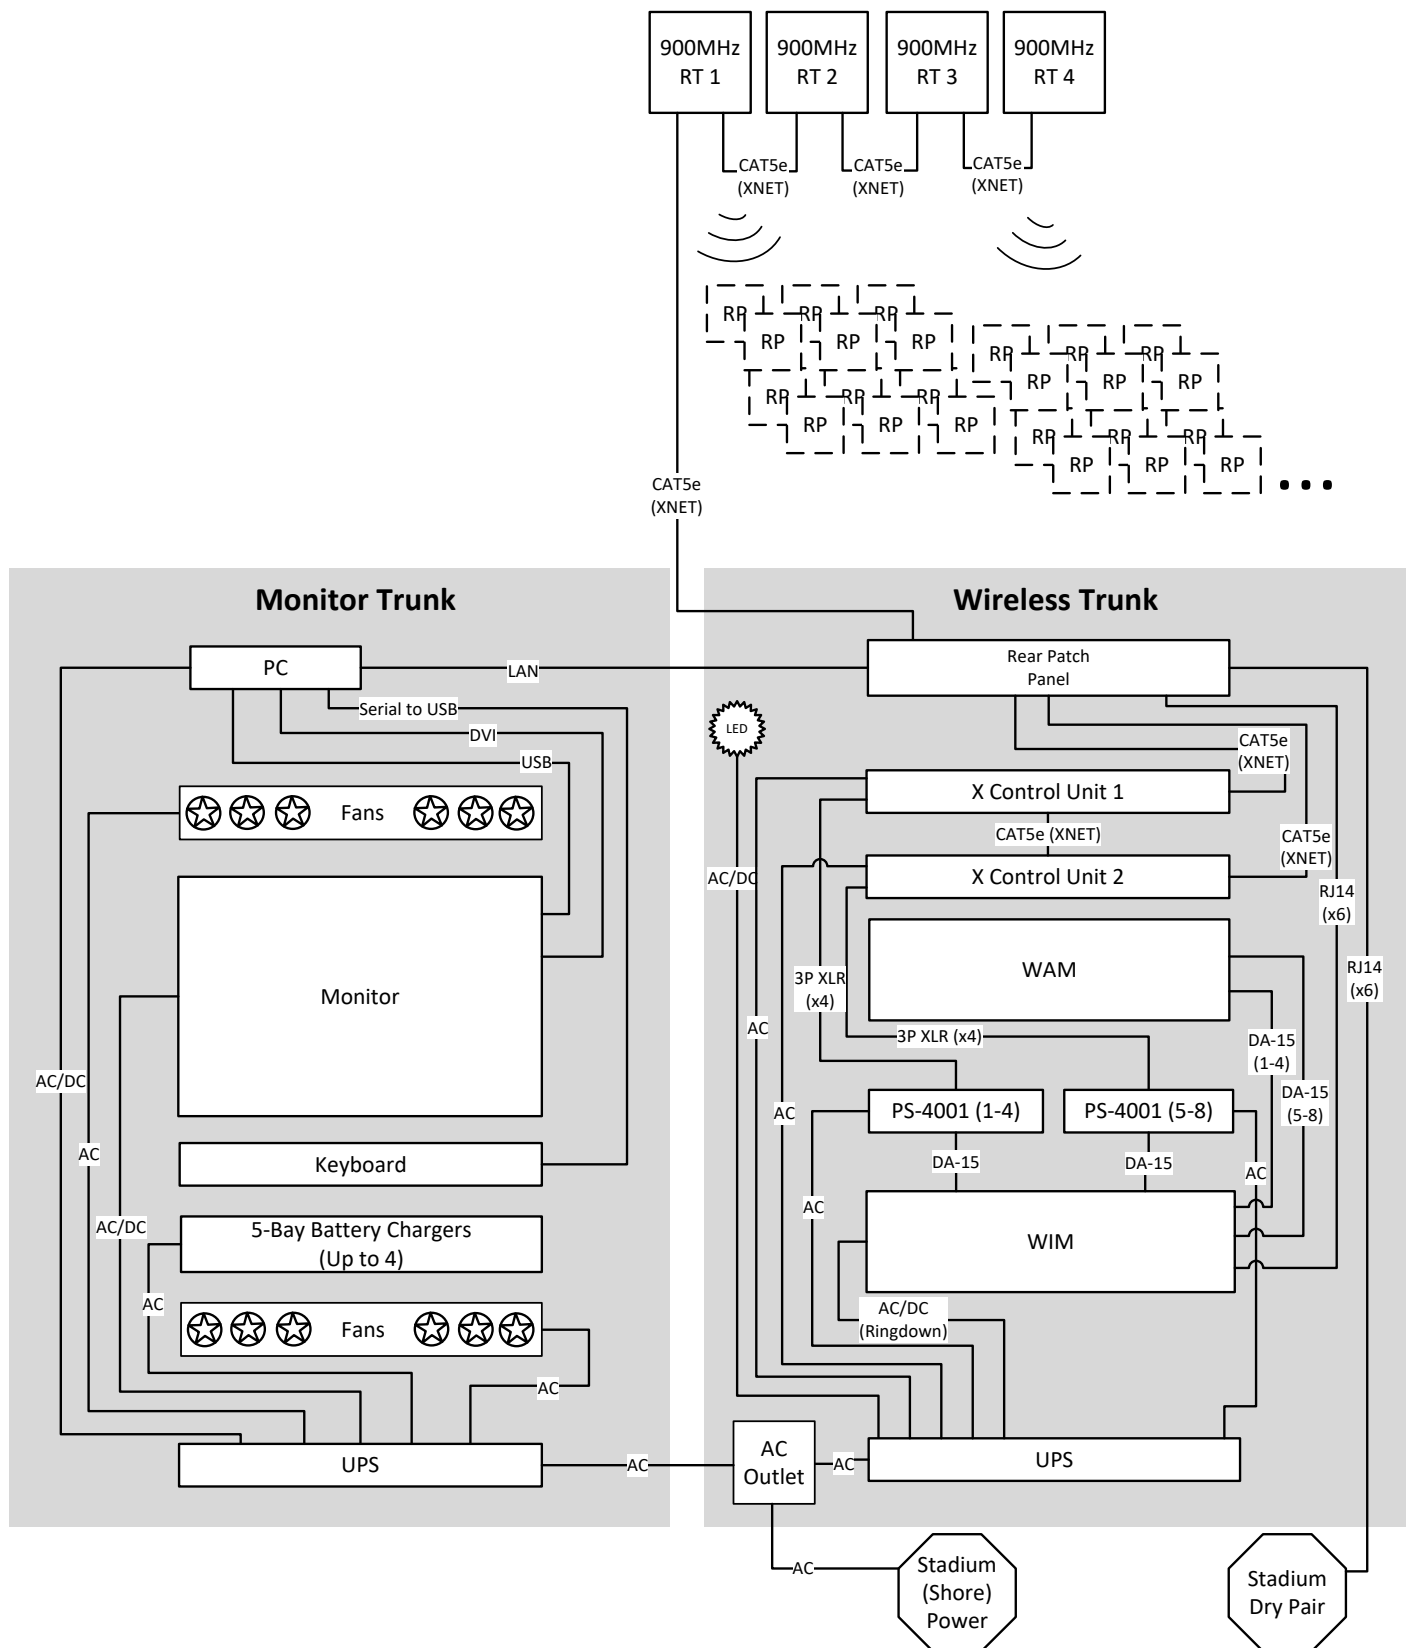


Figure 7: Sideline Trunks Block Diagram

Game Day Setup

The procedures in this section serve as reference for a typical game day setup. You can find more in-depth information about the devices and processes mentioned here in later sections of this Operating Manual.

CAUTION: Allow only responsible, authorized individuals who have read all of the instructions and warnings to set up and operate your X-System.

Note: If you are setting up a Wireless Press Box Unit, additional Game Day Setup instructions are provided in Appendix A on page 79.

1. Position trunks.

- 1a. Position the X-System Wireless Trunk and the Monitor Trunk side by side at midfield.
- 1b. Connect the trunks using the two mast mounting plates.

Note: CoachComm recommends connecting the trunks on a flat surface as close to midfield as possible. After connecting the trunks, they can be rolled to their final position.

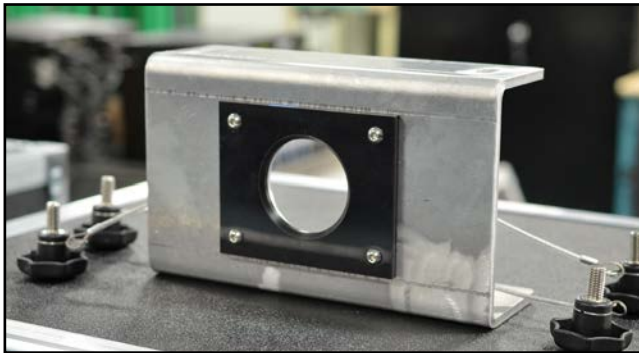


Figure 8: Mast Mounting Plate

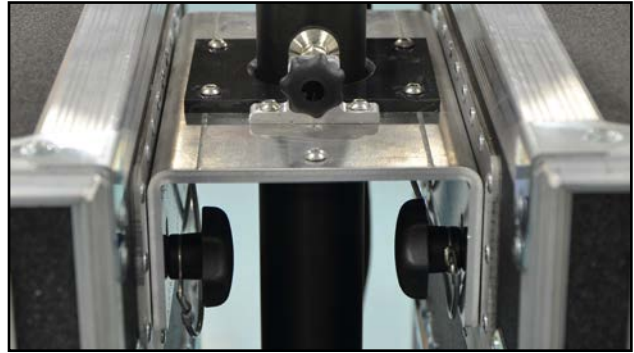


Figure 9: Top Mounting Plate with Mast Secured

2. Prepare RT mast.

The procedures in this step are referenced in the figure below and may require at least two people.

- 2a. Remove the mast from its storage case and insert it into the hole of the mounting plates.
- 2b. Secure the RT mounting bracket to the top of the mast using the provided pin.
- 2c. Connect the RT cable to the first RT on the bracket.
- 2d. Attach the cable's strain relief to the eye bolt on the mounting bracket.
- 2e. Align the mast so the RT mounting bracket is parallel to the sideline, and secure the mast by tightening the knob on top of the mounting plate.
- Note:** Be sure not to over-tighten the knob. Use just enough pressure to secure the mast.
- 2f. Bend the antennas so they are parallel to the ground (90° angle between the antenna and the RT) and point their tips toward the opposing team's RT mast.
- 2g. Fully extend the mast, beginning with the top section and locking each section in place as you go.



3. Connect RT cable and dry pair to the patch panel.

- 3a. Connect the RT cable to the "X-NET Top RT Set" port on the Sideline Wireless Trunk's rear patch panel.
- 3b. Connect stadium's dry pair panel to the corresponding "STADIUM DRY PAIR" ports on the rear patch panel.

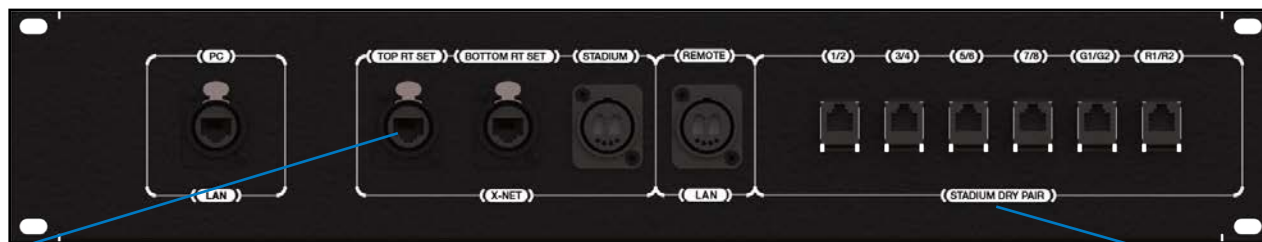


Figure 10: Sideline Wireless Trunk's rear patch panel

(3a.) Connect RT cable to rear patch panel.

(3b.) Connect dry pairs to rear patch panel.

4. Connect LAN and AC power, then power on the system.

- 4a. Route the LAN cable and UPS power cable from the Monitor Trunk to the X-System Wireless Trunk using the trunks' rear cable hatches.
- 4b. Connect the LAN cable to the PC LAN port on the X-System Wireless Trunk's rear patch panel.
- 4c. Connect the UPS power cable to the X-System Wireless Trunk's AC outlet box.
- 4d. Route an external power extension cord into the X-System Wireless Trunk's rear cable hatch and connect it to the main AC power cord from the AC outlet box.



Figure 11: PC LAN port

CAUTION: Secure and protect any cords to prevent walkway hazards and potential contact with moisture.

- 4e. Power on both trunks' UPS power buttons.

5. Set Home/Away status.

- 5a. When prompted, use the top (master) CU's navigational controls to select Home or Away and press the Enter button.

Important: No RF transmission will occur until the Home/Away status is selected. Failure to set this status properly may result in RF interference. It is important to coordinate with opponents to ensure optimal performance for both teams.



Figure 12: CU Navigation Buttons



Figure 13: CU Home/Away Prompt at Startup

The Home/Away setting aids customers with hopping pattern coordination between RTs and Radio Packs. Based on this setting, all of the RTs on the system will be assigned specific hopping patterns by the Control Unit (CU). It is very important to set this status correctly. Hopping pattern coordination prevents interference between X-Systems.

During startup, the configuration file (CCF) will begin loading while the Home/Away prompt is displayed on the top CU. A progress bar shows the load process on the bottom CU. Once the Home/Away prompt is cleared, the CCF load progress can be seen on both CUs.

- 5b. Wait until the CUs display the "CCF Loaded" message along with a configuration file summary. (The bottom CU will take about 30 seconds longer than the top.) When the CCF load is complete, the home screen will display on the front of the CU(s) and you can proceed.
- 5c. Open X-Ware on the touch screen monitor and allow its Home screen to load.

6. Set up Press Box Unit and null system.

The procedures in this step should be performed with at least two people.

- 6a. Once the sideline trunks are configured, set up and connect power to the Press Box Unit. Have someone stay with the sideline trunks to assist in the verification of dry pairs during this step.
- 6b. Connect dry pair panel in the Press Box to the corresponding ports on the rear of the WIM in the Press Box Unit.
- 6c. Connect wired BeltPacks and cables for each coach. Make sure all TALK buttons are off.
- 6d. Auto-null all of the lines from the sideline using X-Ware's Conference view (under the System Settings menu). If there is noticeable echo on some channels of the wireless components, confirm that all TALK buttons are off and repeat the auto-null step.

7. Power on and walk test Radio Packs.

The procedures in this step should be performed with at least two people.

- 7a. Install a fully charged Lithium-Polymer rechargeable battery or three AA alkaline batteries in each Radio Pack (RP).
- 7b. Power on the first two RPs by pressing and holding the Power button on the back of the RP for 3 seconds.
- 7c. Confirm each RP is on the same conference, connect a headset to each RP, and conduct a walk test to confirm their operation. The RP's LQ value can be used to gauge performance.

Important: Each tester should walk their RPs to opposite goal lines and back, ensuring clear communication between all RPs. Always place the RP on the hip opposite from the press box when walk testing.

- 7d. After walk testing is complete, place the RP down on a table or bench. Be sure to place each RP a foot or so apart; bunching RPs together could impact wireless performance. Repeat steps 7b-7c for each of the remaining RPs.

Important: If raining, cover the RPs or return them to their drawer.

- 7e. Confirm communication between wireless and wired coaches.

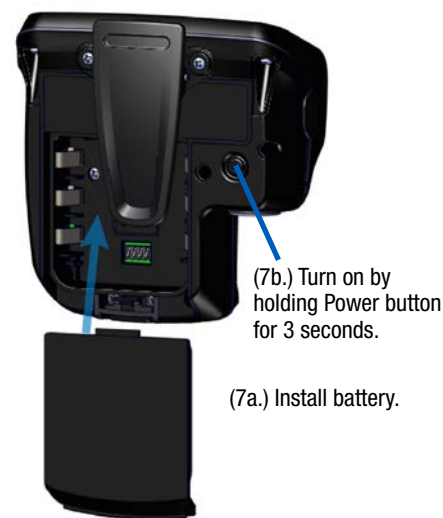


Figure 14: Radio Pack

8. Power off and stow away X-System.

Once your event has ended, power off and properly stow away all X-System components:

- 8a. Power off all RPs and stow them in their drawers.
- 8b. CoachComm recommends saving a backup copy of your system configuration file to the PC desktop or a USB drive. Then, close X-Ware and shut down the PC.
- 8c. Power off the CU(s), then power off both trunks' UPS power buttons. Unplug and remove your extension cord, LAN cable, and UPS power cable.
- 8d. Carefully lower and disassemble the RT mast and RT mounting bracket(s), stowing them in their assigned sections of the accessory case.
- 8e. Disconnect the mast mounting plates and separate the two sideline trunks. Close and secure their lids.

Important: Thoroughly dry off any moisture prior to storage.

X-System Components

Sideline Trunks Overview

The X-System Sideline Trunks house the communications hardware and PC infrastructure that establish X-System and subsequent X-Net network. In addition, these trunks house the wired back-up system and provide storage for related X-System accessories such as Radio Packs (RPs) and Headsets.

Both trunks should be positioned on the sideline at or near midfield within reasonable distance to necessary stadium dry pair connections and power. Be sure to set an adequate perimeter around X-System to ensure it does not interfere with coaches, players, or other game day personnel inside the coaches' box. The following is a list of hardware and accessories that reside inside the trunks:

X-System Wireless Trunk

- A. **X-System Control Unit(s)** (CUs) (See page 21 for more information.)
- B. **Wired Assignment Module** (WAM) (See page 18 for more information.)
- C. **PS-4001 AudioCom® Power Supply(s)** (See page 20 for more information.)
- D. **Wired Interface Module (WIM)** (See page 14 for more information.)
- E. **Drawer** – Provides storage for Radio Packs
- F. **Uninterruptible Power Supply (UPS)** - Provides power backup for trunk
- G. **Rear Patch Panel** – Contains LAN connection, RT connections, and dry pair connections (See page 20 for more information.)
- H. **AC Power Outlet**
- I. **Side (not shown):**
 - i. **Trunk Connection and Mast Mount**

X-System Wireless Trunk

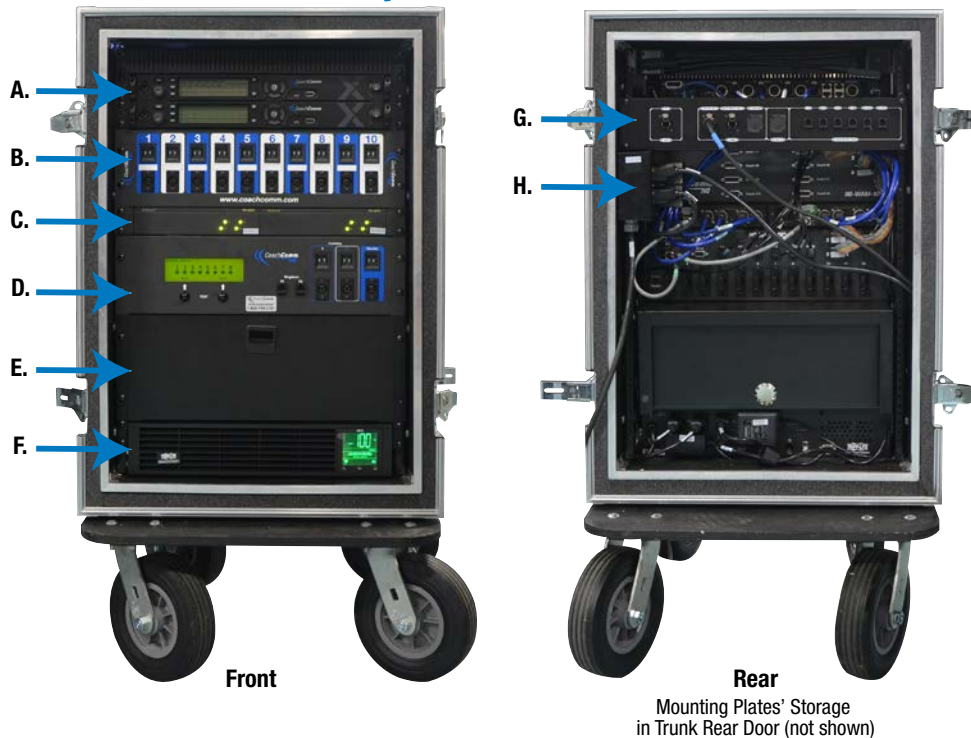


Figure 15: X-System Wireless Trunk



Figure 16: Mounting Plate

Monitor Trunk

- A. **15" Touch Screen Monitor**
- B. **Pull-Out PC Keyboard**
- C. **Drawer** – Provides storage for Radio Packs
- D. **5-Bay Battery Chargers** – Mounted in open-air drawer with rear ventilation fans (See page 30 for more information.)
- E. **Uninterruptible Power Supply (UPS)** – Provides power backup for trunk
- F. **Fans** – Circulate air to 5-Bay Battery Chargers and Power Supplies
- G. **PC** – Provides interface with X-Ware (Intel® Core™ i3 processor, 4GB RAM, 256GB hard drive, and Windows® 7 operating system)
- H. **Side (not shown):**
 - i. **Trunk Connection and Mast Mount**



Figure 17: Monitor Trunk

Mast and RT Case

- A. **RT Cable**
- B. **RT Bracket and Mounted XRTs** (See page 54 for more information.)
- C. **Mast Storage** – Houses the 12' RT mast when not in use
- D. **Accessory Storage** – Houses the USB pairing cables, extra belt clips, USB drive, and spare antennas



Figure 18: Mast and RT Case

Wired Press Box Unit Overview

The Wired Press Box Unit is a trunk that is placed in the press box in or near the coach's box. It is the unit that will tie into the stadium "dry pair" and distribute the correct signal to each press box coach. At this time, no changes have been made to the functionality of the Press Box Unit; X-System connects to the existing Tempest NG Press Box Equipment, so users who are already familiar with its operation will have no change in their processes.

The Wired Press Box Unit houses a WAM 10 wired assignment module, a WIM 8 wired interface module, and an intercom power supply(s). Additionally, on the inside rear of the unit, connections are made for the dry pair via spring jacks or RJ-14s.

Wired Press Box Unit



Figure 19: Wired Press Box Unit Front View

- A. PS 4001 AudioCom® Power Supply(s)
- B. WIM 8
- C. WAM 10



WARNING – DANGER! Users should exercise extreme care when working with electricity. Additional care should be used when working with electricity outdoors in inclement weather. When working outdoors or near water, always connect the system into a ground-fault interrupting circuit.

Note: You can find the Wireless Press Box Unit overview in Appendix A on page 79.

PS-4001 Power Supply(s)

Both the Press Box Unit and the Wireless Trunk have integrated power supplies. These power supplies provide power for each intercom line. Two PS-4001s are used in 4-line systems (one each in press box and on sidelines) and four PS-4001s are used in an 8-line system (two each in press box and on sidelines).



Figure 20: PS-4001 Power Supply Overview

On the inside of the Wireless Trunk and the Press Box Unit, the power supplies are attached to the WIM 8(RD). X-System operates optimally with both units plugged into AC power. If you do not have AC power available at both ends of your system, it is possible to operate the wired portion of the system with AC power connected to only one end of the system. In this mode, however, it is important to connect at least four (4) ground wires (two pair) between the sidelines and press box units.

Wired Interface Module (WIM)

The WIM 8 (8 line) and WIM 8(RD) (ring down) are very similar. The WIM 8(RD) is the same as the WIM 8 but with the addition of integrated generators used for the ringdown circuits. Typically each X-System will have one WIM 8 (press box) and one WIM 8(RD) (sideline). The WIM 8(RD) provides the interface between the stadium wiring and the system. That interface is available via spring jacks or RJ-14s (4-wire RJ). The spring jacks are used for those instances when a user needs to attach to bare stadium wire. The RJ-14s are the preferred method since they provide plug and play connectivity.

In addition to connecting to the stadium wiring, the WIM 8(RD) connects to the WAM 10 and the AudioCom® power supplies. The WIM 8(RD) also provides connections for the local ringdown phone instrument, two flexible isolate/combine circuits, and a monitoring port. During run mode, the LCD will display line status, and during test mode, the LCD will show detected line faults.

Overview

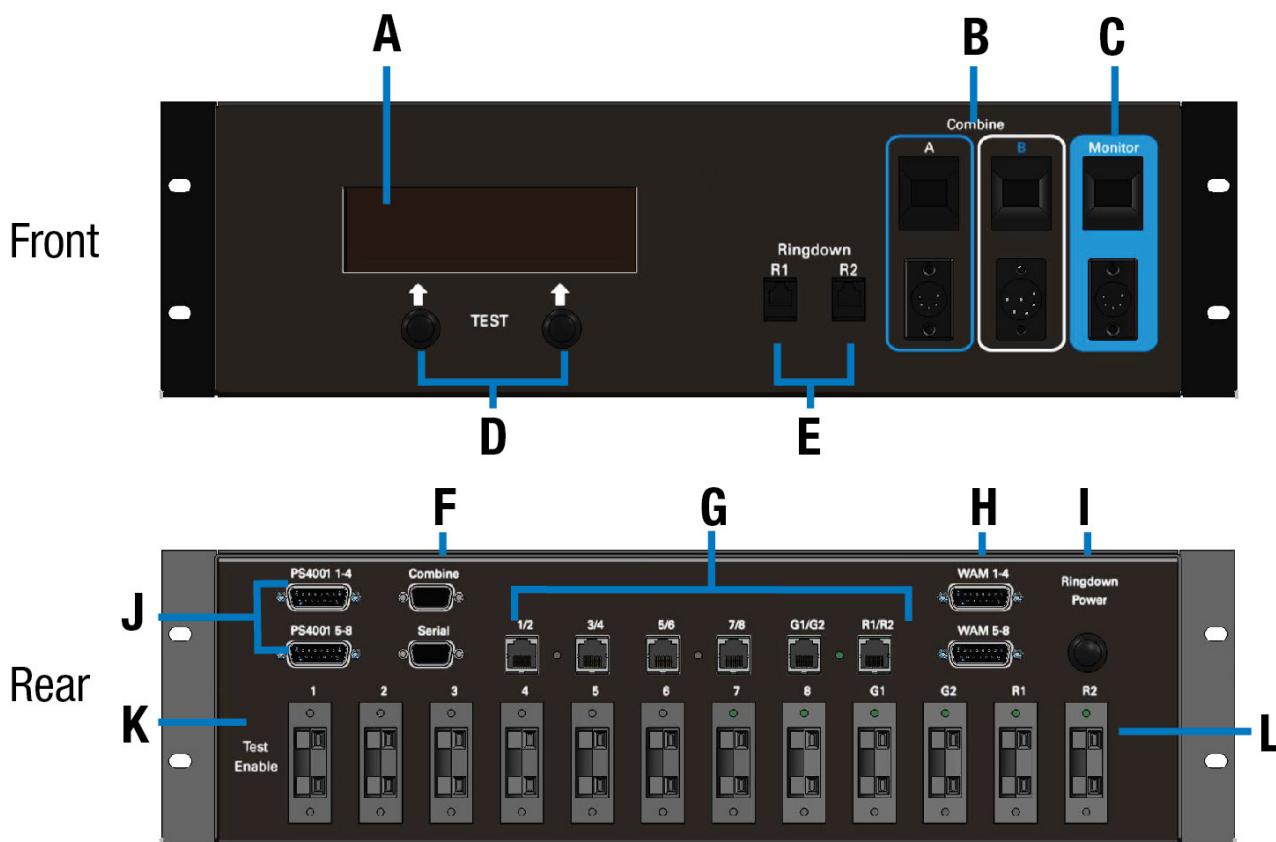


Figure 21: WIM 8 Overview

- | | |
|--|---|
| <ul style="list-style-type: none"> A. LCD B. Flexible Combine Modules — FCM (2) C. Monitor Port D. User “soft buttons,” function indicated on LCD E. Ringdown instrument connections F. Remote trigger for Combine Circuits G. Dry pair connections, RJ-14s H. Connections to WAM 10 | <ul style="list-style-type: none"> I. Power entry for Ringdown Circuits (RD version only) J. Connections to local PS 4001 power supply(s) K. Test Enable Switch L. Dry pair connections, Spring Jacks |
|--|---|

WIM 8 (RD) Integrated Dry Pair Tester (DPT)

The WIM 8(RD) also features an integrated dry pair tester (DPT). The DPT can only be used in systems where there are two WIM 8s.

When two WIM 8(RD)s are connected via dry pair, they can be put into “test mode.” In test mode, the WIM 8(RD)s will test each dry pair using Dual Tone Multi Frequency (DTMF) and display the results on the LCD screen. Both WIM 8s must be connected to the dry pair before testing can begin.

Note: The test mode should ONLY be used before the game. The DPT should NEVER be used during a game because in test mode, no communication over the dry pair is possible. However, there is a hard switch on the rear of the WIM 8(RD) that can defeat the DPT. If you wish to remove all possibility that the system will enter test mode during the game, that switch should be turned to the “Disable” position.

Note: AC power is required on both ends of the system for test mode. The WIM 8 will operate with limited functionality without local AC, but the DPT will not function.

You can start test mode from either WIM 8 in the system. To enter test mode, press the two user soft buttons under the LCD at the same time and hold them for approximately 5 seconds. The LCD screen will display the results of the tests and give options using the soft buttons.

The system will check each pair connected, whether through the RJs or Spring Jacks and report errors in continuity or crosstalk.

It is important to note that the two units communicate over the first four pairs of wires. If none of the first four pairs of wires are connected, the unit will exit test mode and report that no communication could be established with the DPT on the opposite end of the system. If any one of the first four pairs is connected to the remote WIM 8(RD) in any of the first four pair positions, the unit will enter test mode. At least one of those faults must be corrected before testing can be re-initiated as the two units must have at least one good pair to hand shake and begin testing.

WIM 8 (RD) Screens

- **Splash Screen** – This screen is displayed for a few seconds at power up of a WIM 8 or WIM 8(RD).
- **Default Operating Screen** – This screen is displayed during normal operation of the WIM 8(RD). The display shows all eight communication lines (1) and the status of both +24volt sides of those lines (2). A solid triangle indicates appropriate intercom power is present on a particular side of an intercom channel. If you have a 4-channel X-System, there will be no triangles showing under lines 5 through 8.
 - » To enter the “TEST MODE,” depress and hold the buttons (there are two) under the display directly below the words “Test” (3) for five seconds. The WIM 8(RD) has a test disable switch on the rear that makes it impossible for the unit to go into test mode. If that switch is in the “Disable” position, the display will alert you and revert back to the Default Operating Screen. If test is successfully initiated, you will see a status screen for approximately 1 minute, then the fault screen will display.



Figure 22: WIM 8 Default Operating Screen

- **Dry Pair Testing Fault Screen** – This screen displays the faults found during the dry pair testing. If no faults are detected the screen will only show the header information with no detail line items listed below. The local pairs (1) are compared to the remote pairs (2) in a matrix. In Screen A, the system is showing that Pair 1 on the local unit corresponds to Pair 3 on the remote unit. Screen A also shows that Pair 2 locally is connected to Pair 4 on the remote side of the system. It also shows that lines 3 and 4 locally are connected to 1 and 2 on the remote end. If there are more than four lines of errors, the soft buttons will change to read “NEXT” and “PREV” as is appropriate. Use the buttons under PREV and NEXT to scroll through the results.



Figure 23: WIM 8 Dry Pair Testing Fault Screen

Flexible Combine Module (FCM)

Flexible Isolate/Combine Modules are not provided with X-System, but some customers may still have a Module from a Tempest NG system. This module allows for the combining or isolating of two intercom lines. For example, if you wish to have two lines of Offense (i.e., Offense 1 and Offense 2), you may wish for all coaches on the Offensive side of the ball to occasionally be in one conversation. A remote switch is provided on the end of a cable. The remote is plugged into the WIM 8(RD) in the appropriate 5 pin XLR jack. When the switch is activated, the corresponding lines of audio are connected and become one conversation.

There is a two-digit thumbwheel per FCM. These are used to select the two lines that you wish to combine. While any two lines may be selected, you cannot repeat any line on both FCMs. For example, if FCM #1 is set to 1 2, then FCM #2 cannot be set to 2 3 since 2 is on both FCMs. This condition will create undesirable audio in the system.

Note: When any FCM is not in use, it should be set to 0 0 to maximize system performance. Also, the FCMs should be set to the desired settings prior to wireless set-up (covered later in this manual).

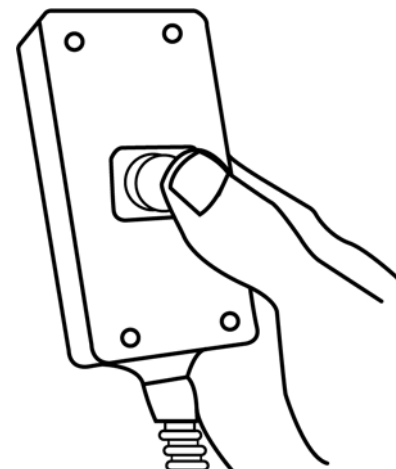


Figure 24: FCM Remote Switch

Ringdown Circuits

The Ringdown Circuits are two conventional telephone circuits completely separate from the intercom system. A customer-supplied telephone is plugged into the Ringdown Circuit in the Monitor Trunk and another in the Press Box Unit. When one phone is taken “off hook,” the phone on the opposite side rings.

In X-System, the ringdown circuit generators are located in the Wireless Trunk and are therefore on the UPS in the event of a power failure.

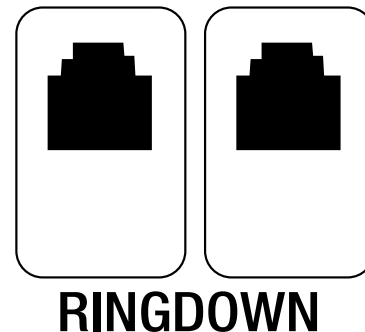


Figure 25: Rendering of Ringdown Circuits

Wired Assignment Module (WAM)

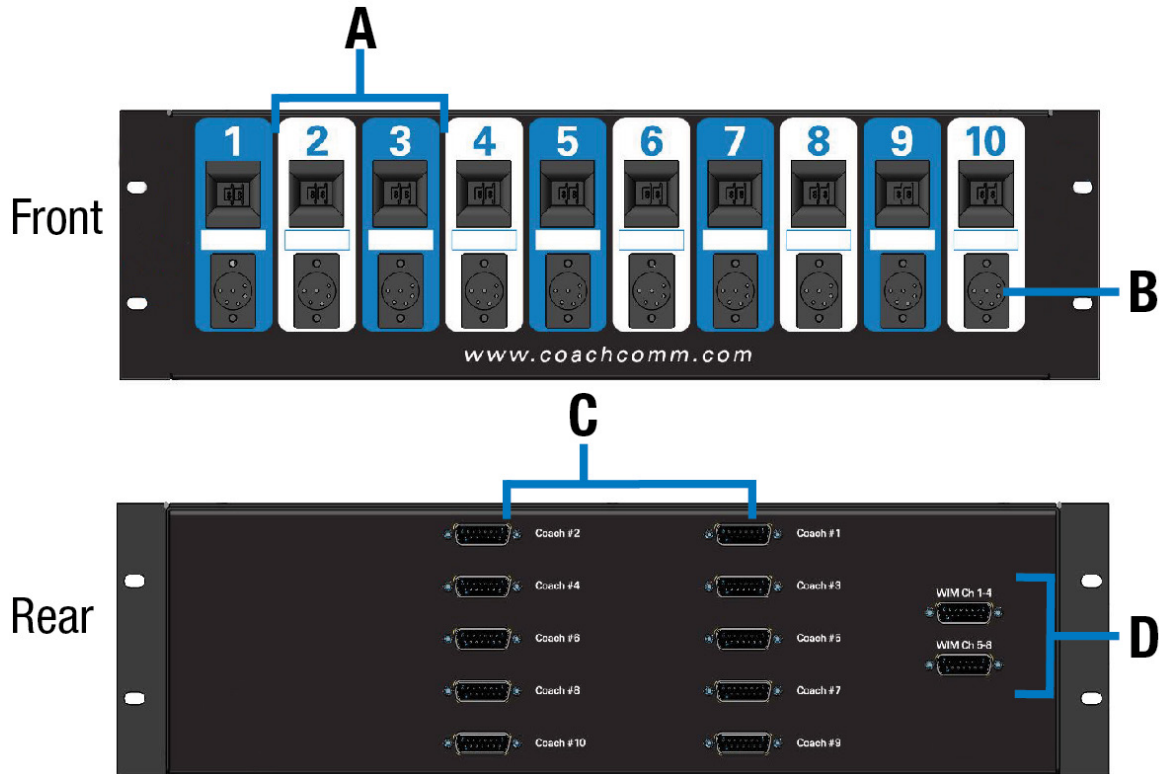


Figure 26: WAM 10 Overview

- A. Dual Assignment Thumbwheels (1 through 10)
- B. Wired back up ports, 6 pin XLR, two line (1 through 10)
- C. DA-15 connections for each assignment position (not used in Tempest NG or X-System)
- D. DA-15 connections to the WIM 8(RD)

The WAM 10 is the module that routes lines, or conversations, to the desired individuals on X-System. It connects to the intercom system through the WIM 8(RD) and from the WIM 8(RD) to the AudioCom® intercom power supplies and the stadium dry pair.

The WAM 10 is used to “patch” wired users to specific lines of intercom. The selectors or “thumbwheels” allow for selection of talk lines to be made for each user on the system. Each wired user is plugged into the XLR provided under that coach’s setting. Should a wireless coach require a wired unit during an outage or “back up” situation, a wired unit can be plugged into the XLR provided under that coach’s setting. It should be noted, however, that the wireless system and the wired backup can be used at the same time.

The front of the WAM 10 has ten coach positions: 1 through 10. Each position has a two-digit thumbwheel and a 6-pin XLR connector. For each coach, the thumbwheel is used to select which lines (conversations) that a coach will have access to. For example, if you have a coach that wants to communicate between lines one (1) and three (3), the left side of the thumbwheel for that coach would be set to “1,” while the right side of that coach’s thumbwheel would be dialed to “3.” If you have a coach that should only communicate on line four (4), both sides of that coach’s thumbwheel would be dialed to “4.” In this scenario, the coach can move the selector on the BeltPack, but the net result is that he remains on line four.

The WAM 10 routes the selected lines to the 6-pin XLR. The XLR is meant to be used in conjunction with a BP 2002 or BP 6000 with switchcraft neutrik adapter cable and a 6-pin, 2 line cable to provide wired backup for each coach.

For each wired coach, select the lines that coach needs to access via the thumbwheel switch and plug in a wired cable and BeltPack directly under that thumbwheel switch. If you have a problem with that coach's wireless component during the game or during setup, you may choose to put that coach on a wired set by simply plugging in a wired cable and BeltPack under that coach's selector switch.

Make a System Diagram – A very important part of successful system administration is to draw out a system diagram and document settings. There are many adjustments with X-System, especially if the wireless components are integrated into it. CoachComm strongly recommends that you spend the time to document your initial settings, so that in a rush you can get your system back in the same configuration time and time again.

If the coach is using a wired BP 1002 single-channel BeltPack, an adapter will be required. The adapter will be plugged into the 6-pin XLR under his respective thumbwheel, and that coach will have access only to the line shown on the left digit of that thumbwheel.

It is important to note that the XLR wired connections provided under each thumbwheel are not tied directly to the wireless system. The wireless system and wired BeltPack can be used at the same time independent of one another.

Sideline Trunk Data and Power Management

Connecting Trunks

When connecting the Wireless Trunk and the Monitor Trunk together, you must route the LAN cable and UPS power cable from the Monitor Trunk to the Wireless Trunk using the trunks' rear cable hatches. Then, connect the LAN cable to the PC LAN port on the Wireless Trunk's rear patch panel and connect the UPS power cable to the Wireless Trunk's AC outlet box.

Powering Trunks

Route an external power extension cord into the Wireless Trunk's rear cable hatch and connect it to the main AC power cord from the AC outlet box. Power on both trunks' UPS power switches.

Connecting the AC Power Outlet to Stadium Power (or equivalent AC power source) provides AC power to the racked devices of both trunks.

AC Power



WARNING – DANGER! Users should exercise extreme care when working with electricity. Additional care should be used when working with electricity outdoors in inclement weather. When working outdoors or near water, always connect the system into a ground-fault interrupting circuit.

Wireless Trunk Rear Patch Panel

The Wireless Trunk's rear patch contains the trunk's X-Net connections for RTs and Stadium Dry Pair ports. See the details below about each connection on the panel.

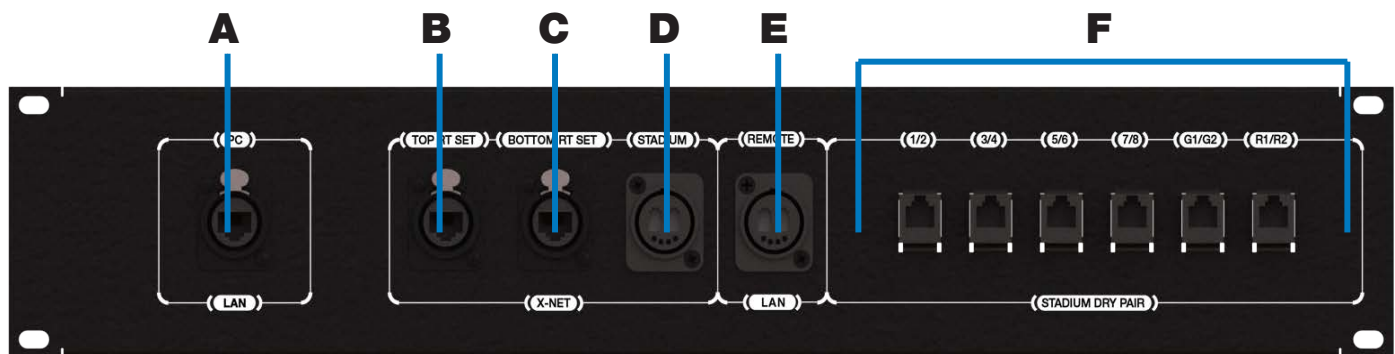


Figure 27: Sideline Wireless Trunk Rear Patch Panel

- A. **PC LAN** – LAN connection for the Monitor Trunk
- B. **TOP RT SET** – RJ-45 Ethercon connection for the RT set mounted on the top of the mast
- C. **BOTTOM RT SET** – N/A (Reserved for future system functionality)
- D. **STADIUM**: Duplex LC Neutrik OpticalCon Duo connection for the stadium single mode fiber cable (provides fiber X-Net connection from Sideline Trunk to Wireless Press Box Unit)
- E. **REMOTE LAN**: Duplex LC Neutrik OpticalCon Duo connection for the stadium single mode fiber cable (provides fiber LAN connection from Sideline Trunk to Wireless Press Box Unit)
- F. **STADIUM DRY PAIR** – Provides the interface between the copper dry pair stadium wiring and X-System via spring jacks or RJ-14s (4-Wire RJ)

Control Unit (XCU-44)

The X-System Control Unit(s) (CUs) are mounted in the front rack of the Wireless Trunk. These devices serve as the foundation of the wireless communication system. CUs contain no radio and are frequency agnostic, which sets the groundwork for a multi-frequency capable system. For maximum flexibility, any CU can access, control, and monitor any active device across X-Net.

The X-System Control Unit is the foundation for X-Net. A separate Radio Transceiver (RT) is required for RF communications. The Control Unit is capable of supporting all models of X-System Radio Transceivers at the same time (900MHz or 2.4GHz).

Control Unit Front



Figure 28: Control Unit Front View

- A. **Local Headset Connection** – 4-pin XLR male headset connector on the CU's front panel.
 - B. **Talk Button for Local Headset** – The Talk button works in conjunction with the Local Headset Connection. The Talk button enables or disables the microphone for the local headset. A white “TALK” LED will illuminate when the mic is enabled.
 - C. **Headset Volume Knob** – Turning the Volume control adjusts the listening volume of the local headset. Clockwise increases the audio level; Counter-clockwise decreases the audio level.
 - D. **Wired Intercom Access Button** – When pressed, the CU menu jumps directly to the Wired Settings screen.
 - E. **Radio Packs Button** – Switches the Home screen to a selectable mode that allows selection of a (wireless) Radio Pack to edit its settings (via the navigational controls).
 - F. **Local Button** – Opens the local headset settings on top of the current screen display, allowing for adjustments to the local headset settings.
 - G. **LCD Screen** – Display for viewing real-time status of system, navigating menus, and making subsequent setting adjustments. The LCD screen is the focal point of the Control Unit's functionality. On the Home screen, the LCD displays the status of all Normal mode wireless Radio Packs that are currently paired to the Control Unit. In the Menu, the LCD shows the menu items or information.
 - H. **Menu Button** – Accesses the main menu system of the Control Unit. While in the menu system, one short press acts as “Escape” to return you to the previous menu without saving any changes.
 - I. **Home Button** – Returns you to the Home view when pressed. This also serves as an escape button; no changes that may have been in process are saved if Home is pressed before saving.
 - J. **Navigational Controls** – Up, Down, Left, and Right move the cursor or marker on the LCD to make adjustments in edit mode. Enter (Center) selects the current cursor position or saves the current setting adjustment.
 - K. **USB Micro B** – For connectivity to a computer when updating device firmware.
 - L. **USB A** – For Radio Pack pairing, additional X-System device connectivity to update firmware, and external USB flash drives.
- Note:** The X-System CU is currently compatible with FAT and FAT32 formatted USB thumb drives (up to 16 TB drive size). Some operating systems (e.g., Windows 10) promote NTFS format, but only allow FAT32 formatting up to 32 GB. For help with formatting larger USB thumb drives, contact CoachComm Customer Support at 1.800.749.2761.
- M. **On/Off Switch** – Turns the power to the Control Unit on and off.

Control Unit Rear

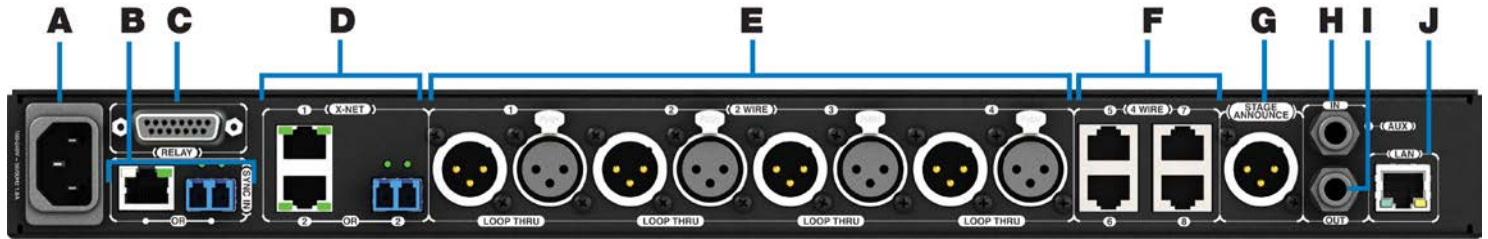


Figure 29: XCU-44 Back View

- A. **AC Power Connection** – 100–240V, 50/60 Hz 0.8A
- B. **SYNC IN Port (RJ-45 or Fiber)** – SYNC IN allows the Control Unit to sync its timing with another external system to optimize both systems' performance, while keeping each system's audio separate and secure. This port is not currently used with X-System.
- C. **RELAY Connection** – Not currently used with X-System
- D. **X-NET Ports (Cat 5e or Fiber)**: The Control Unit's X-Net ports allow it to connect to any available X-Net port on other devices, such as RTs, forming a proprietary network where all devices are part of a system configuration that shares data, timing synchronization, and audio. Each Control Unit has up to two X-Net connections, using either two RJ-45 ports (copper that is Cat 5e or greater) or one RJ-45 port and one duplex LC port (Single Mode Fiber).
- E. **2 WIRE Intercom Port (x 4)** – The Intercom Channel ports (1, 2, 3, and 4) connect the Control Unit to wired intercom and dry pair wires. The pairs of XLR-3M and XLR-3F are electrically identical—including the grounds—and the grounds of the two channels are electrically isolated from each other. The 2-Wire Intercom settings can be adjusted under the Wired Settings menu or via X-Ware.
- F. **4 WIRE Intercom Port (x 4)** – Not currently used with X-System
- G. **STAGE ANNOUNCE (SA)** – Not currently used with X-System
- H. **Auxiliary Audio Input (AUX IN)** – Not currently used with X-System
- I. **Auxiliary Audio Output (AUX OUT)** – Not currently used with X-System
- J. **Local Area Network (LAN) Port** – The LAN port allows the Control Unit to be connected to the system PC and X-Ware. The LAN port's LEDs indicate the status of the LAN link.

Control Unit LCD

Home Operating Screen

Serves as the primary operating screen and displays the status of the Control Unit's connected Radio Packs.

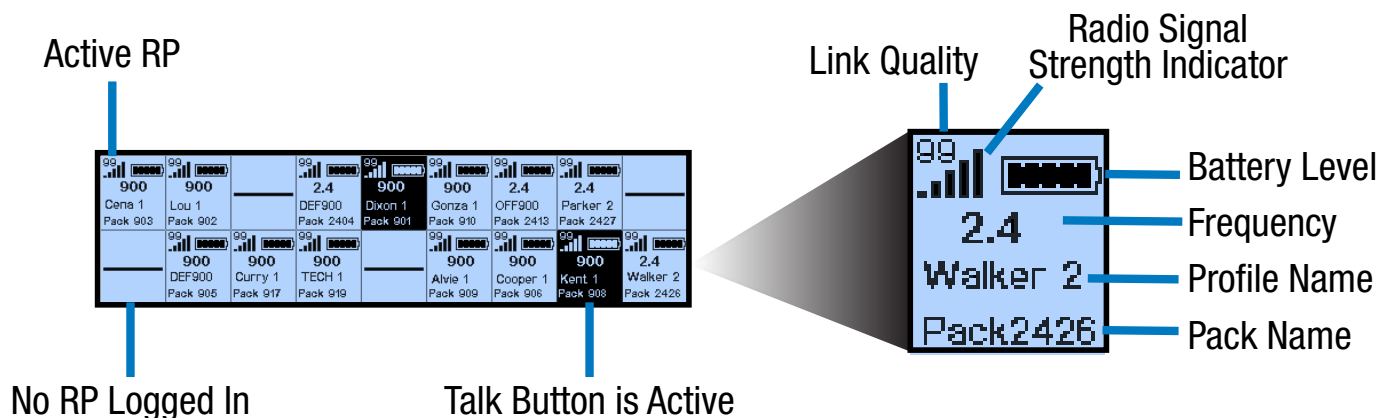


Figure 30: Control Unit Primary Operating Screen

Note: The Link Quality Indicator (LQ) provides a diagnostic measurement of actual packet transmission from Radio Pack to RT and vice versa. The LQ value on the Control Unit LCD represents the lowest LQ value of the two possibilities. To discover more about which value is displaying on your device, you would need to consult the individual Radio Pack or X-Ware. (See “Understanding Link Quality” on page 59 of this manual for more information.)

Secondary Operating Screen

Displays additional information about the status of the Control Unit's connected Radio Packs. Short press the Home button once to toggle between the Primary and Secondary screens. After 60 seconds, the screen will timeout and revert back to the Home screen.


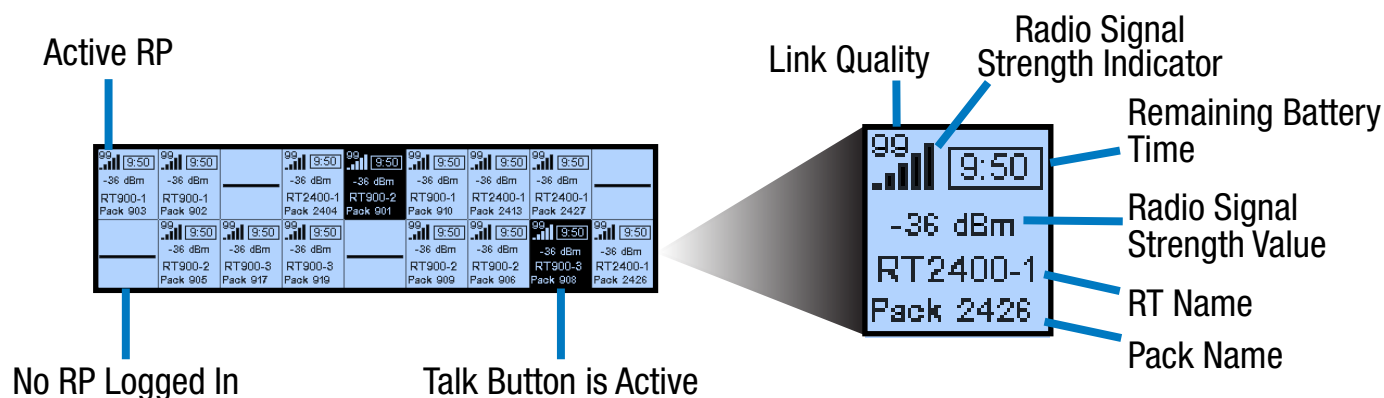


Figure 31: Control Unit Secondary Operating Screen

Note: Radio Signal Strength Value displays the actual value of the radio signal in dBm.

Control Unit Menu

The Control Unit settings can be accessed and adjusted from the Control Unit's front panel LCD, or via the X-Ware interface on the touch screen monitor. The following menu tree displays the Control Unit's primary menu options and settings.

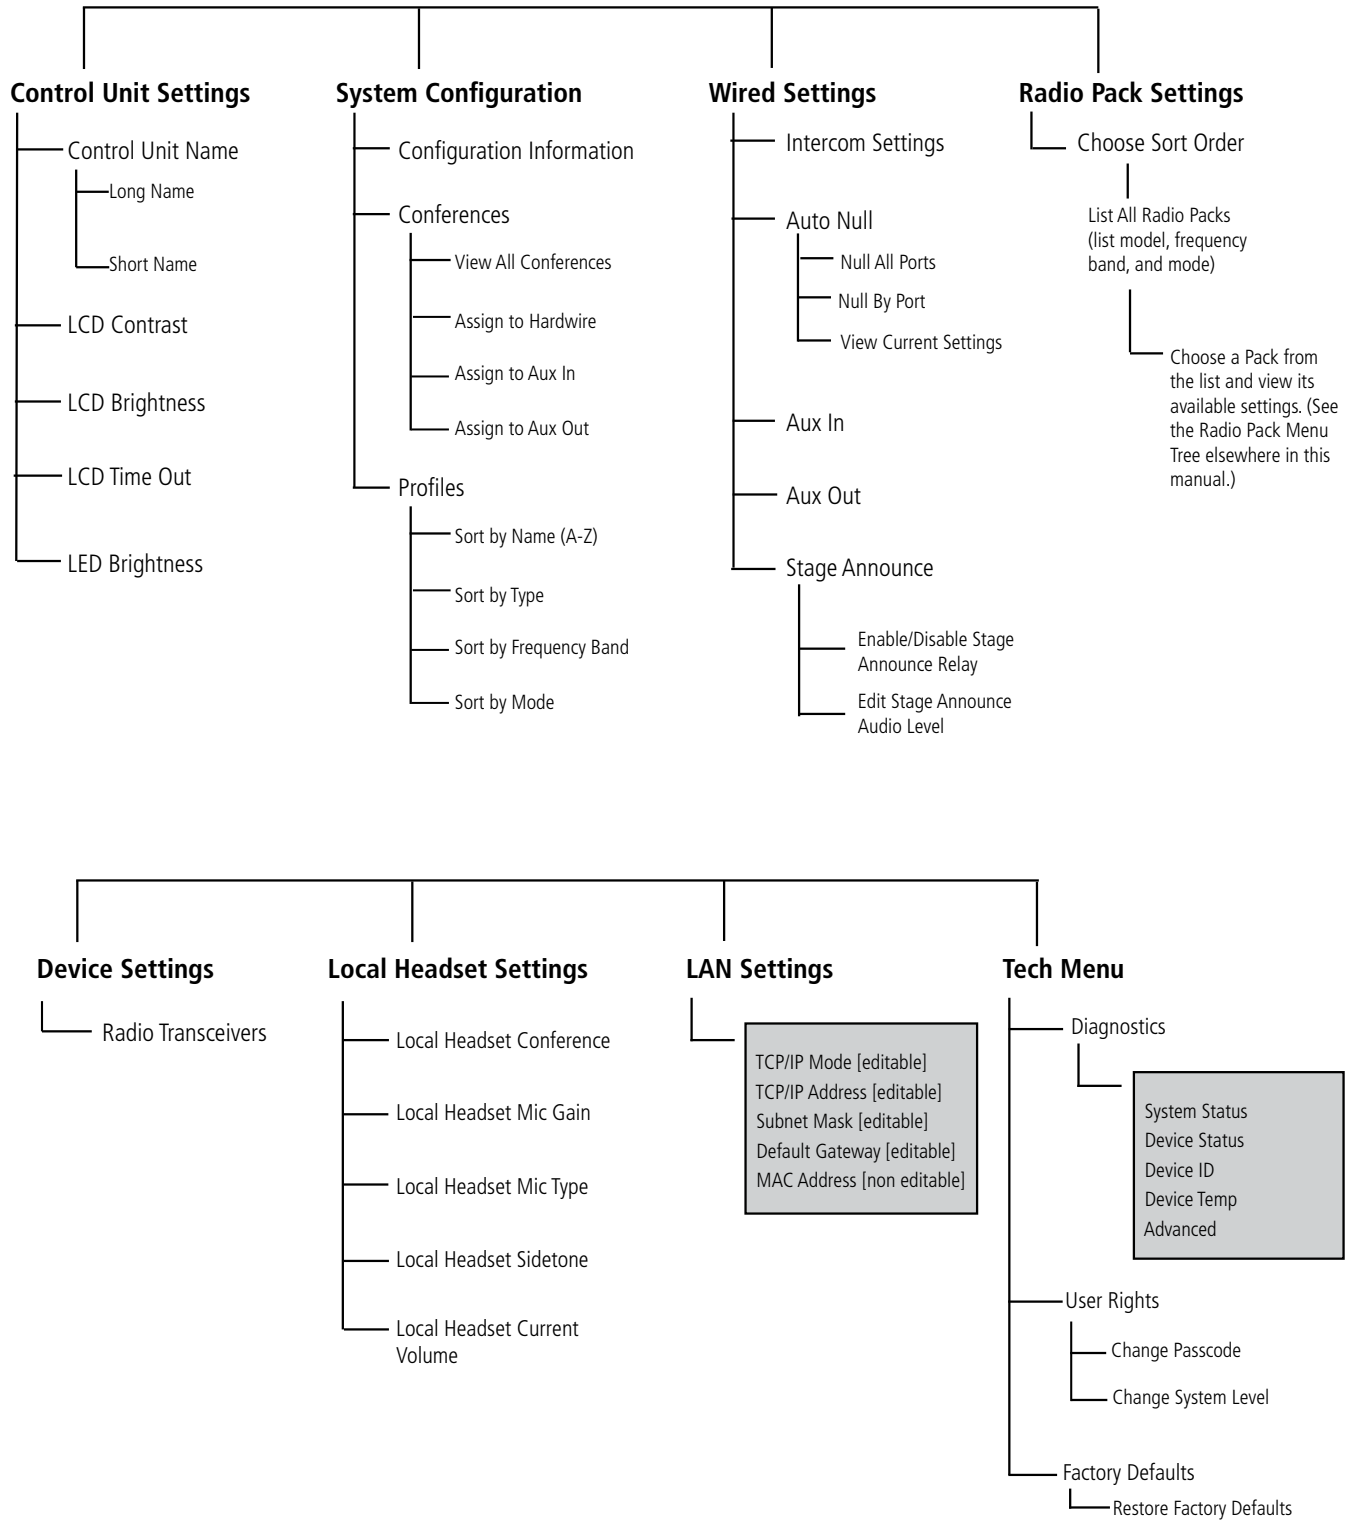

Radio Transceivers (XRT-900 and XRT-2400)

The X-System Radio Transceiver (RT) serves as a point of contact for wireless Radio Packs on X-Net and houses either a 900MHz or 2.4GHz radio. RTs should be positioned as high as possible on the mast to provide better and more expanded coverage. (See “RT Mast Assembly” on page 54 for more information about positioning RTs.)

For a single Control Unit to allow the maximum 18 Normal mode Radio Packs to communicate wirelessly (6 per RT), a minimum of 3 RTs is required.

RT Top

- A. **Antenna Connections –** RP-TNC (Connector). Only CoachComm-approved antennas may be used with X-System RTs. For more information about antenna deployment see RT Mast Assembly on page 54.
- B. **PING LED –** Not currently used with X-System

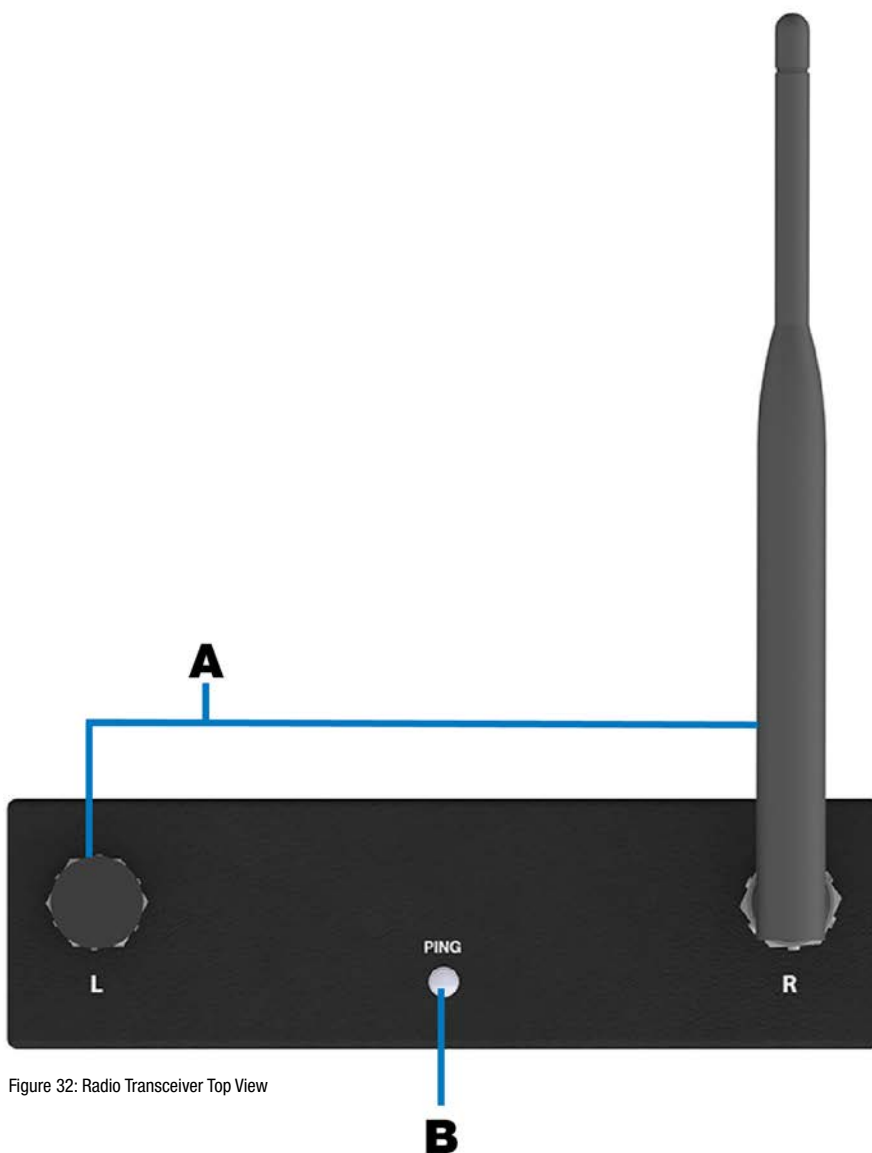


Figure 32: Radio Transceiver Top View

RT Bottom

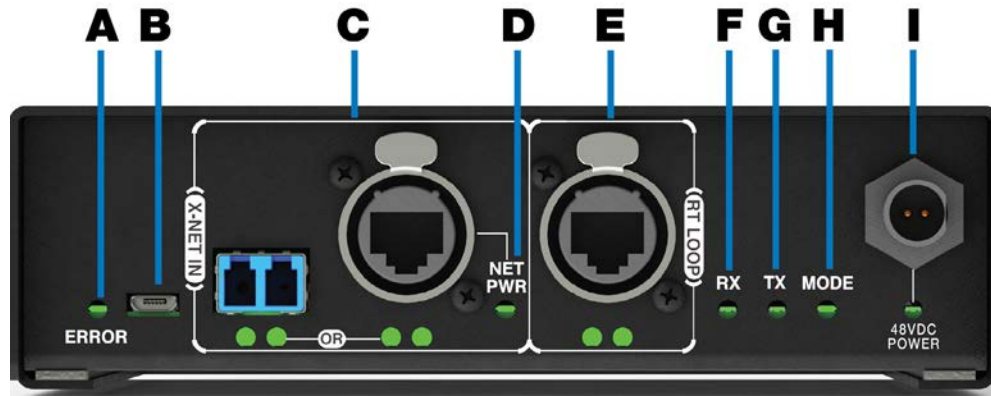


Figure 33: Radio Transceiver Bottom View

- A. **ERROR LED** – Indicates the device's error status.
- B. **USB Micro B Connection** – For connectivity to a PC or Control Unit for updating device firmware.
- C. **X-NET IN Port (Cat 5e or Fiber)** – The RT's X-NET IN ports allow it to connect to any available X-Net port or RT Loop port on other devices, adding the RT to a proprietary network where all devices are part of a system configuration that shares data, timing synchronization, and audio. Each RT has an X-NET IN port (RJ-45 for Cat 5e copper or duplex LC for Single Mode Fiber) and an RT LOOP port (RJ-45, which allows RTs to be daisy-chained to one another).
- D. **Network Power (NET PWR) LED** – Not currently used with X-System
- E. **RT LOOP Port and Status LEDs** – Not currently used with X-System
- F. **RX LED** – Green LED—BLINKS when RT is receiving transmissions from Radio Packs.
- G. **TX LED** – Green LED—ON (blinking rapidly) when RT is transmitting properly.
- H. **MODE LED** – Green LED—ON when set to Normal Mode.
- I. **48VDC POWER Connection and LED** – The locking DC Power Connector enables the RT to be powered locally with a CoachComm 48VDC power supply (sold separately). Not currently used with X-System.

Radio Packs (XRP-13)

The X-System Radio Pack (RP) is to be worn by a user on the sideline. This Radio Pack communicates directly to its corresponding RT. All wireless users are connected together through the wired system via the Control Unit and the WIM 8.

Radio Pack Top

- **Conference A/B Rocker Knob** – The Conference A/B knob selects whether you are listening to your RP Profile's assigned Conference A or Conference B.
- **Conference C Button** – The Conference C button enables or disables the audio for the RP Profile's assigned Conference C.
- **Volume Knob** – The Volume control adjusts the listening volume of the connected headset for the selected Conference. Turning the Volume control clockwise increases the audio level, while turning the control counter-clockwise decreases the level.

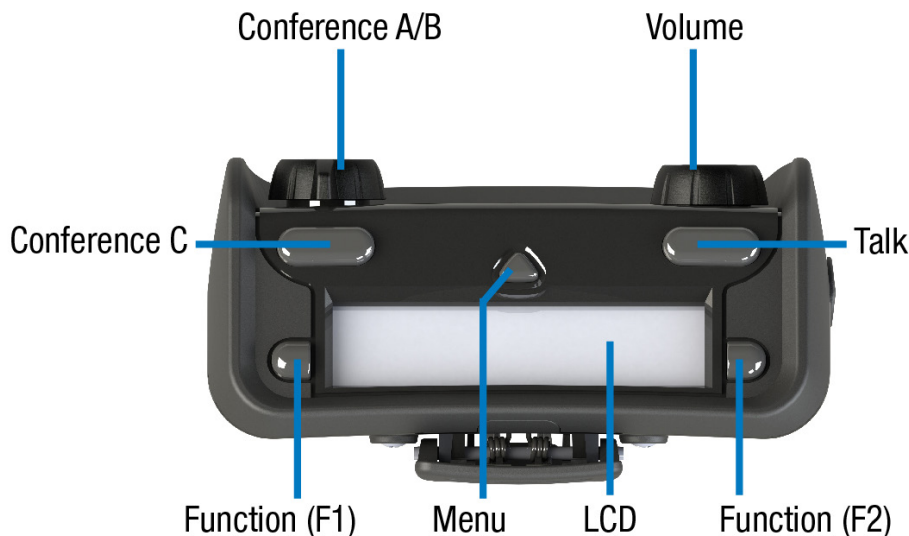


Figure 34: XRP-13 Top View

- » This control also serves as an Audio Overlay (AO) volume control when pressed and turned simultaneously. (AO must be enabled on Conference C first. See page 52 for more information about setting up AO.)
- **Talk Button** – The Talk button enables or disables the microphone for the selected Conference. Talk buttons can be set to function as “Latch” press, “Momentary” press, or “Always On.” In addition, X-System uses an intelligent latching method for Talk buttons. When set to “Latch,” one short press will latch the Talk on; however, pressing and holding the Talk button will cause the button to act as a momentary switch.
- **Function Buttons (F1/F2)** – The left (F1) and right (F2) function buttons can be programmed to assign a variety of functions. Each Function button's operation is set in the RP's Profile, which can be customized via X-Ware. While in the menu, one short press of F1 returns you to the previous menu without saving any changes.
- **Menu Button** – The Menu button provides multiple functions such as access to menu options or toggling between the home operating screen and the secondary operating screen.
 - » Short Press – Cycles the RP LCD from the Home Operating screen to the Secondary Operating screen and vice versa.
 - » Long Press – Accesses the menu options of the RP to view device/system information and make setting adjustments.
 - » Escape – While in the menu, one short press returns you to the previous menu without saving any changes.
- **LCD** – Display for viewing real-time status of the RP, navigating menu options, and making subsequent setting adjustments.

Radio Pack Rear

- **Belt Clip** – Secure and sturdy belt clip enables Radio Pack wearing via belt.
- **Battery Compartment Door** – Secures and protects the Radio Pack's Lithium-Polymer battery or 3 AA batteries.
- **Battery Door Release** – Pressing the release opens the Radio Pack's battery compartment.
- **USB (Micro B) Connection** – This USB connection is for connecting a Radio Pack to a Control Unit

for pairing and firmware updates. The Radio Pack may also be connected to a PC for firmware updates via X-Ware. See page 64 for more information on updating firmware.

- **On/Off Button** – The On/Off button powers the Radio Pack on and off when pressed for 3 seconds.
- **4-Pin Male XLR Headset Connector** – Headset connector is a 4-PIN male XLR connection. Optional XLR adapters (4-PIN female to 4-PIN female and 4-PIN female to 5-PIN female) are sold separately.

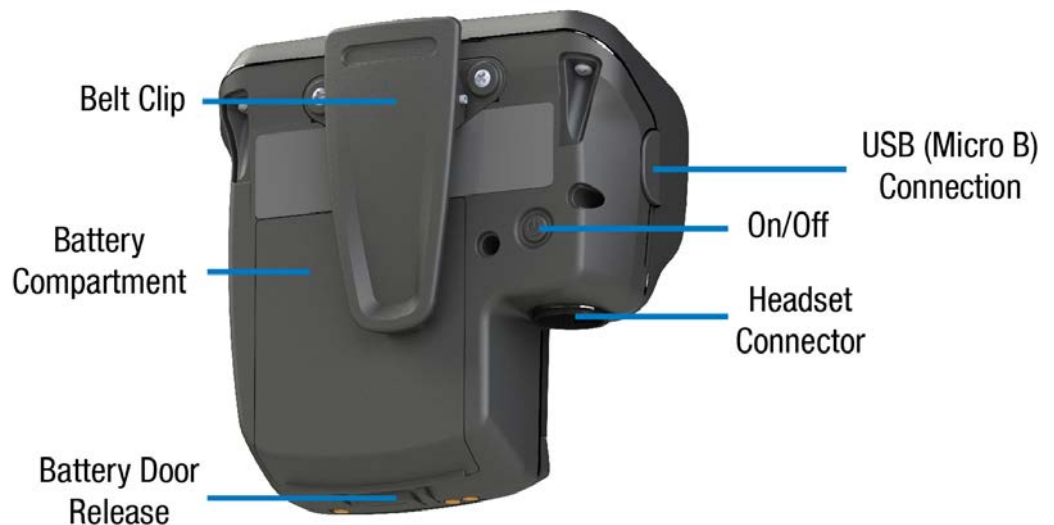


Figure 35: Radio Pack Rear View

Radio Pack LCD

Home Operating Screen

Serves as the main operating screen and displays the status of the Radio Pack as well as talk, volume, and function assignments.

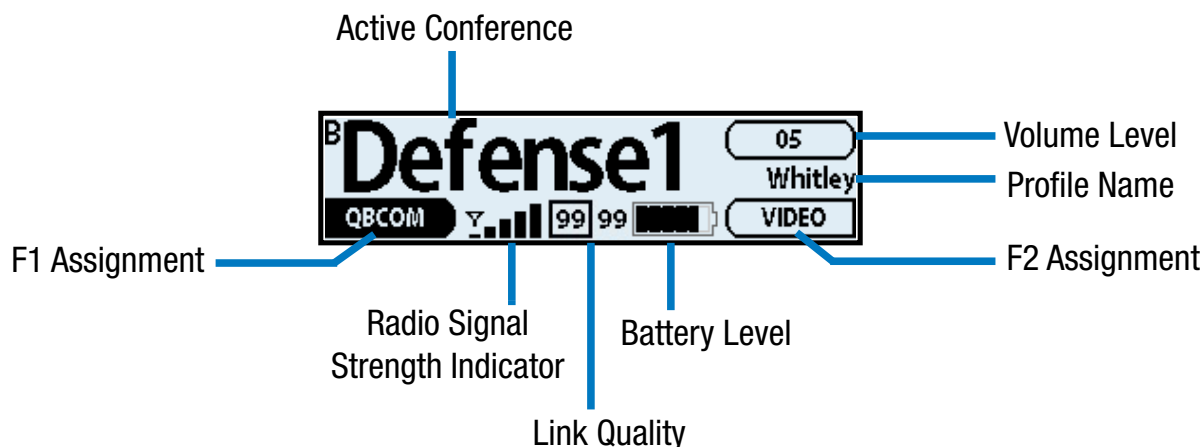


Figure 36: RP-44 Home Operating Screen

Note: The Link Quality Indicator (LQ) provides a diagnostic measurement of actual packet transmission from Radio Pack to RT and vice versa. The outlined LQ represents the Radio Transceiver's LQ. (See "Understanding Link Quality" on page 59 of this manual for more information.)

Secondary Operating Screen

Serves as a secondary operating screen and displays additional information about the status of the Radio Pack. Short press the Menu button once to toggle between the Home and Secondary screens. After 60 seconds, the screen will timeout and revert back to the Home screen.


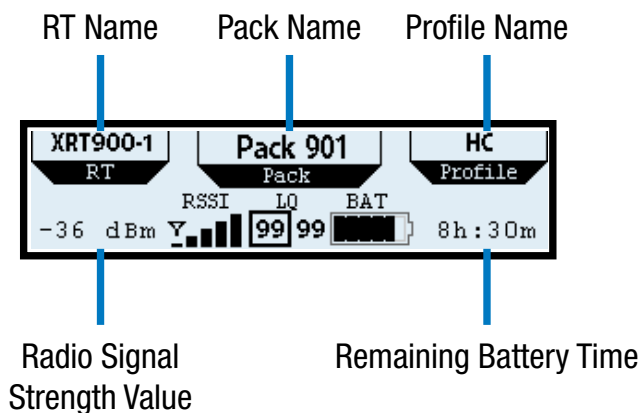


Figure 37: RP Secondary Operating Screen Overview

Note: Radio Signal Strength Value displays the actual value of the radio signal in dBm.

Radio Pack Menu

Radio Pack settings can be accessed and adjusted from the Radio Pack's LCD, the Control Unit's LCD, or via the X-Ware interface on the touch screen monitor. The following menu tree displays all of the Radio Pack's menu options and settings:

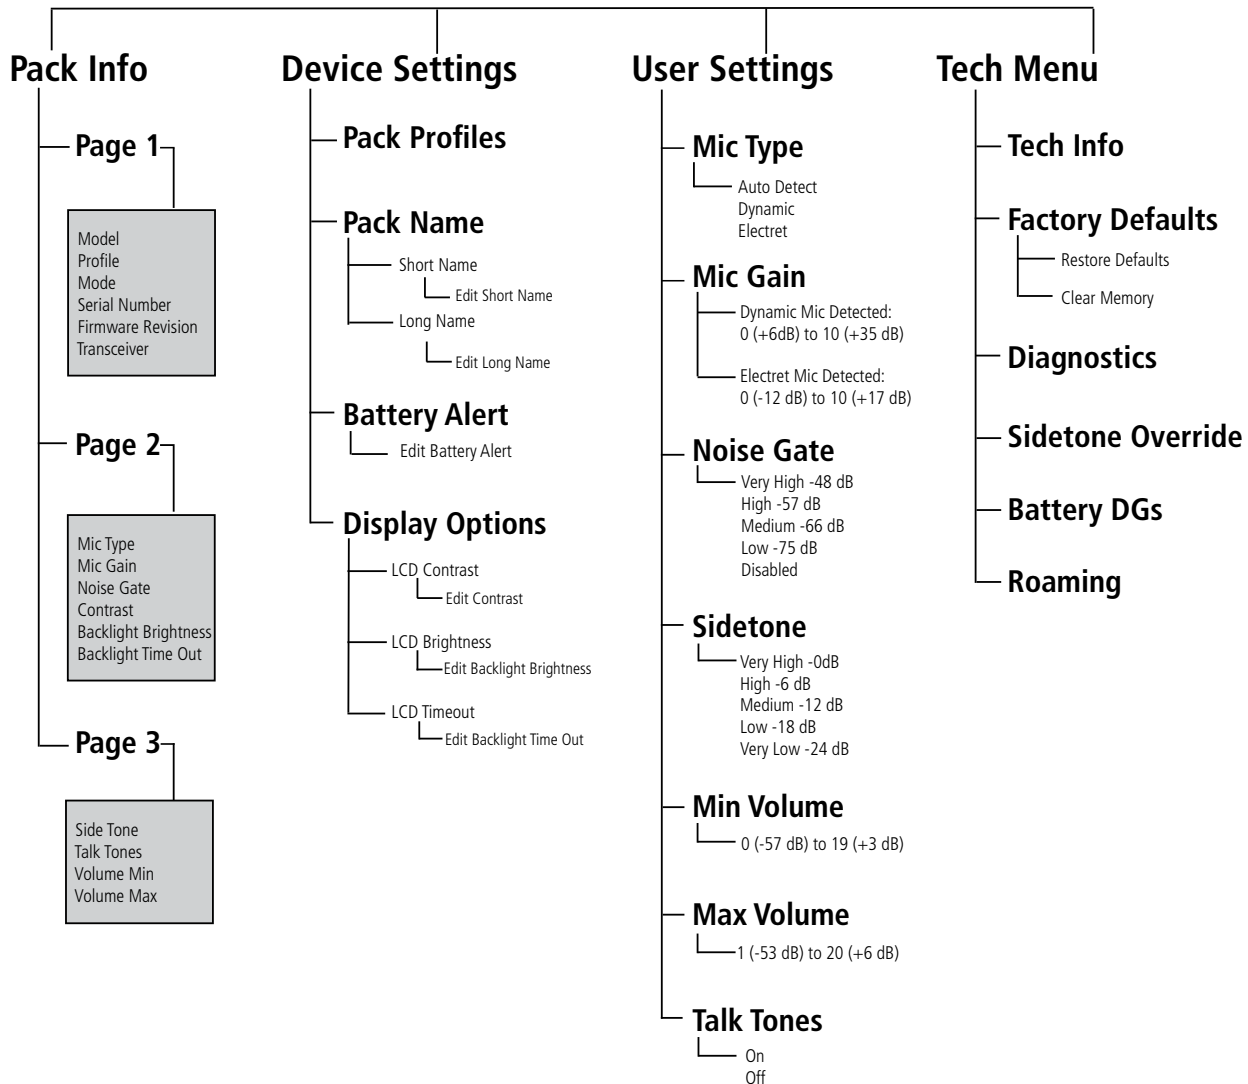

Radio Pack Battery Charging Rack

Radio Packs are powered with (1) Lithium-Polymer rechargeable battery for greater than 10 hours (2.4GHz) or 9 hours (900MHz), or they may be powered with (3) AA Alkaline batteries for approximately 5 hours (2.4GHz) or 4.5 hours (900MHz).

The batteries can be charged either inside the Radio Pack with an external power supply or by using the 5-bay rapid charger. The batteries require approximately 3 hours to charge from empty. Take care to insert the battery with the contacts facing down into the Radio Pack and oriented such that the contacts on the battery will line-up with the contacts inside the Radio Pack battery compartment.

To charge the Radio Pack, connect the plug-in battery charger (included with Radio Pack) to a standard wall outlet and to the Micro-USB connector on the Radio Pack. The connector is located under the rubberized access cover on the side of the Radio Pack. The battery may also be charged inside the Radio Pack via the USB port of a computer.

The 5-bay charger(s) are located in the rack of the Wireless Trunk. Up to five (5) CoachComm lithium-polymer batteries may be charged at the same time using the 5-bay charger. If charger(s) overheat, it will need to be moved to a cooler area to charge batteries properly. As a lithium-polymer battery safety mechanism, the battery chargers include a safety circuit, which prevents charging of batteries if the ambient temperature is too hot. For the batteries to charge in the 5-bay charger, the Monitor Trunk must have external AC power.



Figure 38: 5-Bay Battery Chargers

The Radio Pack (RP) may also be powered by three (3) alkaline AA batteries. CoachComm recommends that only major brand, standard alkaline batteries should be used for maximum reliability and effectiveness. You should expect approximately 5 hours (2.4GHz) or 4.5 hours (900MHz) of operation using new alkaline AA batteries.

There are several considerations you should take into account when using AA batteries. The RP's battery level and remaining battery time indicators only reflect battery life for lithium-polymer batteries; therefore, those screen options will not be used when AA batteries are in use. In cold weather, AA batteries do not release their stored energy completely, so the result is a dramatic reduction in operation time. It would not be uncommon to have an AA battery only last 50% of its original life when used in very cold situations. Also, remove the AA batteries when not in use to avoid potential damage from leaking battery acid that can sometimes occur in these type batteries.

Installing a Radio Pack Battery

Before powering on an RP, install its battery by doing the following:

1. Hold the RP at a 45-degree angle, pointing the bottom end down. Then, depress the RP's belt clip and hold it.
2. Press the battery-release button on the bottom of the RP and pry open the battery door. Remove the door.
3. While still holding the RP at an angle and depressing the belt clip, install a fully charged Lithium-Polymer rechargeable battery or three AA batteries in the RP.
4. Place the battery door back on the RP, making sure to align its tab and secure the door by pressing until it clicks.
5. Turn on the RP by pressing and holding the Power button on the back for 3 seconds.

Note: The RP will not operate unless it has been paired to a Control Unit; if it has not been paired it will indicate "No Pairing Information Available" on the pack's display. In addition, the RP will not communicate if its CU and RTs are not yet online. CoachComm recommends powering on the CUs and RTs first before powering on the RPs.



Figure 40: Rear View of RP's Power Button and Battery Door



Figure 39: Radio Pack Battery Installation

Pairing an RP to a Control Unit

RPs must be paired to a Control Unit (CU) before they can operate with your X-System. Once RPs are paired to a CU, this process does not need to be done again unless the RP is being paired to a new or different CU (for example, after a replacement is made for repairs). An RP may be paired without installing a battery, if required. In this case, the CU will provide power to the RP during the pairing process. If no battery is installed, the RP will power down as soon as it is disconnected from the CU.

- **Compatibility Note:** To work together as a system, all connected devices must have firmware that matches the version installed on the top (master) CU. See the Firmware Update procedures on page 64 for more information.
- **Limit of Active RPs for systems with more than three Radio Transceivers (RTs):** A maximum of 18 900MHz and 18 2.4GHz RPs may be active on X-System because each RT allows 6 RPs. Since only 18 RPs can be active on a single CU, you should pair 900MHz RPs to the top CU, and pair 2.4GHz RPs to the bottom CU. If you have more than 18 RPs in either frequency, you can pair the extras to the appropriate CU, but those extras will not display as "active" until you remove one of the original 18 active RPs.

To pair your RP, use the following steps. **IMPORTANT** While pairing, do not disconnect the RP until you are instructed to do so.

1. Connect the RTs (on the mounting bracket) to the Wireless Trunk's rear patch panel. Then, power on the CUs.
2. When prompted on the top (master) CU, select either **Home** or **Away**. Wait about 2 minutes for the configuration file to load on the system—all CUs will display a “CCF Loaded” message and a configuration file summary—wait until this message has cleared from all screens before taking further action. Once the message times out, the home screen will display on the front of the CUs.

CCF Loaded				
Version: 3	Flags: 02	Length:	21,232	Number of Devices: 8
Device Connection: 7	Control Unit: 2	Expansion: 0	Hub: 0	
Radio Transceiver: 6	Radio Pack: 36	Radio Pack Profile: 36		
Conference: 12	Relay Assignment: 0	Aux Audio Assignment: 0		
User Info Record: 0	Access Rights:	0	UI Data: 0	

Figure 41: CCF Loaded Screen

3. Ensure the RP to be paired is powered OFF.

Important! *Since only 18 RPs can be active on a single CU for mixed-frequency systems, you should pair 900MHz RPs to the top CU, and pair 2.4GHz RPs to the bottom CU.*

4. Connect a USB-to-Micro-USB cable from the top (master) CU to the device (micro end goes into the RP's USB port beneath its rubber port cover). The RP will power on by itself. Pairing begins automatically and should take about 30 seconds.
5. When prompted, use the RP volume knob and function buttons to choose a Profile from those available in the list on the RP's LCD.
6. Wait for the Profile to load. The RP LCD will display a “Pairing Complete” message when the Profile is finished loading.
7. Disconnect the USB cable from the device. The RP will power off automatically when disconnected.
8. Power on the RP and wait for it to log in to the system. The initial login may take up to 90 seconds. When an RP is logged in, the RSSI indicator will display on the RP's primary LCD screen.
9. Verify that the RP paired correctly and is displayed on the CU LCD and in X-Ware. You may need to refresh the X-Ware display by touching the grid button on the right-hand side.

Note: *If you're using a new or recently serviced CU, or if you are pairing an RP that has never been paired to your system, the RP icon(s) in X-Ware will default to the top left corner of the software Home screen. Position the icon(s) as desired for your configuration.*



Figure 42: X-Ware Grid Button

10. The RP is ready for use. Repeat steps 4–9 until every RP is paired.

System Accessories

Wired BeltPacks

(AudioCom® by Telex®)



Figure 43: BP 1002, BP 2002, and BP 6000 Wired BeltPacks

Each wired user on the system must have either a BP 1002 single-line or BP 2002/BP 6000 dual-line BeltPack. Connections on the BeltPacks include a 4-pin headset connector and a 3-pin (BP 1002) or 6-Pin (BP 2002 or BP 6000) XLR for connection to the system. For a BP 1002 to work with a WAM 10, you will have to purchase a 6-pin-to-3-pin adapter since the WAM 10 only supports 6-pin equipment. The BP 6000 comes with the switchcraft neutrik adapter cable. The neutrik adapter cable will connect to the existing field and press box cables.

The BeltPacks feature a large volume control and a “Talk” button. This talk button must be activated before that user is heard on the system. Additionally, the BP 2002 and BP 6000 feature a “line” button that allows you to “toggle” back and forth between two different conversations (or lines) on the system.

Field and Press Box Cables



Figure 44: Field and Press Box Cables

Wired users are connected to the Wireless Trunk and the Press Box Unit via Field and Press Box cables. Field cables are generally 100 ft. in length. They can be customized to 125 ft. or 150 ft. Press Box cables are generally 25 ft. in length. There are two variations of each cable: single line and dual line. The single-line cables (ME 100HD and ME 25HD) are used in conjunction with the BP 1002 single-line BeltPack for those users who are to have direct access to only one line. (See exception in the “Flexible Combine Module (FCM)” section on page 16.) The dual-line cables (ME 100/2HD and ME 25/2HD) are used in conjunction with the BP 2002 and BP 6000 dual-line BeltPack for those users who are to have direct access to two lines.

Headsets

Previous models sold are the PH-100 and PH-200, the HR-1 and HR-2, and the SM-100 and SM-200. CoachComm now exclusively offers the SmartBoom® series of headsets. The SmartBoom technology enables you to effortlessly mute your microphone by simply raising the boom above your brow. Re-enable the microphone by lowering back to the mouth. All headsets have a 4-pin XLR connector.



Figure 45: SBP-152, Dual Ear Model SmartBoom PRO Headset

System Configuration File

X-System's System Configuration File contains everything about a system, including X-Net device locations, port assignments, Conferences, and Profiles. This file lives in the Control Unit, and it coordinates all device activity on the system. Only one configuration file can be live on a system at any given time; however, you can save multiple versions of configuration files locally or on a USB drive. These saved files have a ".ccf" file extension, which stands for "CoachComm Configuration File." CCFs can be edited offline using X-Ware on your PC and then uploaded to your master Control Unit directly from X-Ware or via a portable USB drive at the front USB port of the CU. Instructions for Uploading a CCF are provided in the following sections.

Each X-System is pre-configured by CoachComm with the customer's desired settings, and setup/modification of the configuration file is performed from X-Ware. CoachComm's customer support staff is available to help with any advanced configuration needs during the season.

Saving a System Configuration File

Changes to the configuration during operation will be saved at the Control Unit. However, if you wish to save a copy of the configuration file for later use, follow these procedures:

1. Make sure your Control Units are powered on. If you have not already done so, set the Home/Away status.
2. Launch X-Ware, then click the gear icon located at the top right of the home screen. This will launch X-Ware's Advanced Settings window. (See page 40 of this manual for more information about using X-Ware.)
3. If you wish to save your file to a USB Drive, insert one into the X-System computer (located in the top, rear rack area of the Monitor Trunk behind the touch screen monitor.)

Note: Make sure the USB drive has enough space on it to save the file. 50 KB should be sufficient.

Note: The X-System CU is currently compatible with FAT and FAT32 formatted USB thumb drives (up to 16 TB drive size). Some operating systems (e.g., Windows 10) promote NTFS format, but only allow FAT32 formatting up to 32 GB. For help with formatting larger USB thumb drives, contact CoachComm Customer Support at 1.800.749.2761.

4. Go to **File** and click **Save File As...** and save your file to your USB drive or to a designated folder on your trunk computer. .

Note: The file name must be 8 characters or less! It is helpful to include your school and a date in the name when sending it to CoachComm for assistance. For example, BC_WK918, IndSt918, etc.

5. Once the file has been saved to your USB drive, you can exit out of the software and eject your USB drive from the computer.

See "Uploading a Configuration File" on page 37 for instructions on loading a saved file to your system. See "Opening a System Configuration File Offline" on page 47 for instructions on how to work with a saved configuration file.

Uploading a Configuration File

Uploading a Configuration File via X-Ware

Follow these procedures when uploading a previously saved configuration file to your system via X-Ware. See “Opening a System Configuration File Offline” on page 47 for instructions on how to work with a saved configuration file.

1. Connect your RTs, make sure each Control Unit (CU) is powered on and has completed loading the current configuration file, select Home or Away, and open X-Ware. The system will be “Live” using the CU’s current configuration file.
2. Open X-Ware Advanced Settings window by tapping on the Gears icon.
3. Save a backup copy of the current configuration file by selecting **Save File As...** from the File menu. A Windows directory will display where you can choose a file location and name for the saved backup file.
***Important:** Saving a backup copy of the current configuration file is helpful in case you need to revert back to it for any reason.*
4. Select **Upload File...** from the File menu.
5. Follow the X-Ware prompts to complete the upload. While uploading, X-Ware will notify you of any configuration exceptions (for example, any RPs needing to be repaired).
6. During the upload, X-Ware will disconnect, and you will need to reboot your X-System CUs when prompted by the CU LCD. Once rebooted, X-Ware will reconnect.

Loading a System Configuration File via USB Drive

Follow these procedures when uploading a previously saved configuration file to your system via USB Drive. See “Opening a System Configuration File Offline” on page 47 for instructions on how to work with a saved configuration file.

***Important!** Be sure you have saved a backup copy of your current configuration file prior loading a new one, in case you need to revert back to it for any reason.*

1. Make sure each Control Unit (CU) is powered on and has completely loaded the current configuration file, then plug the USB drive into the front of the top (master) CU. An External USB Drive menu screen will display on the CU LCD.
2. Use the CU’s navigation buttons to scroll through the list of menu options on the top CU’s LCD until **Upload System Configuration** is highlighted.

***Important!** Only load your CoachComm configuration file to the top CU. Loading the file to the bottom (secondary) CU may cause system malfunction.*

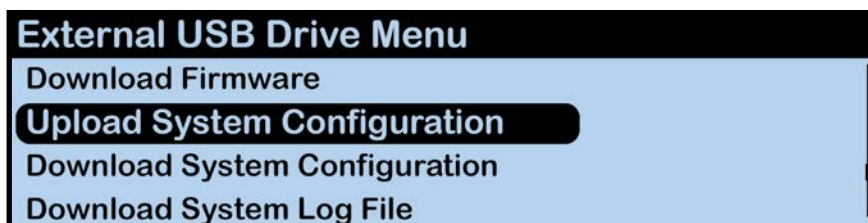


Figure 46: CU LCD Upload Configuration File Prompt

- Press the top CU's enter button and scroll until you find the configuration file you wish to use, then press enter to select it.



Figure 47: CU LCD List of Available Configuration Files

- The top CU screen will display a progress message while the new configuration file loads.



Figure 48: CU LCD: Sample CCF Upload In Progress Screen

- Once the configuration file has finished loading, the top CU will display the following message: "Upload System Configuration. CCF Upload Complete." along with a configuration file summary. A prompt will instruct you to "Please cycle power to Control Unit and any connected devices." Reboot both CUs.

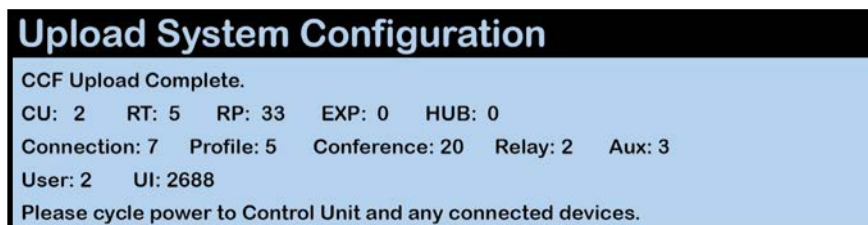


Figure 49: CU LCD: Sample CCF Upload Completed Screen

- Select either **Home** or **Away** when prompted on the top CU. During startup, the configuration file (CCF) will begin loading while the Home/Away prompt is displayed on the top CU. A progress bar shows the load process on the bottom CU. Once the Home/Away prompt is cleared, the CCF load progress can be seen on both CUs.



Figure 50: CU Home/Away Prompt and Progress Bar

7. Wait until the CUs display the “CCF Loaded” message along with a configuration file summary. (The bottom CU will take about 30 seconds longer than the top.) When the CCF load is complete, the home screen will display on the front of the CU(s) and you can proceed with operation.

CCF Loaded				
Version: 3	Flags: 02	Length:	21,232	Number of Devices: 8
Device Connection: 7	Control Unit: 2	Expansion: 0	Hub: 0	
Radio Transceiver: 6	Radio Pack: 36	Radio Pack Profile: 36		
Conference: 12	Relay Assignment: 0	Aux Audio Assignment: 0		
User Info Record: 0	Access Rights:	0	UI Data: 0	

Figure 51: CCF Loaded Confirmation Screen

X-Ware

X-Ware is X-System's proprietary intercom management software, and its easy-to-use touch screen interface provides fast access to critical information and settings, allowing efficient management of large systems.

Within X-Ware, you can manage user settings, set up and manage Profiles, assign dry pairs, and access system diagnostics.

Home Screen

When X-Ware opens, the Home screen displays an overview of icons that represent all RPs on the system and their current status on the system. This is the default screen that displays during game time.

- A. **Icon Filter Buttons**
- Shows all RP icons, sideline ("SL") icons, or press box ("PB") icons
- B. **Lock-Out Button** - Locks X-Ware. If a passcode has been set up by a system administrator, unlocking requires passcode entry. This prevents unauthorized access. See page 53 for more.
- C. **RP Icon** - Contains the Profile Name, Active Conference, Pack Name, and indicators for battery, volume, and frequency. The icons can be positioned to your liking by dragging them to a location on the screen.
- D. **System Button** – Opens X-Ware's additional Radio Transceivers, Radio Packs, and Conference views.
- E. **Advanced Settings Button** – X-Ware's

Advanced Settings interface is where the core operational settings for the system configuration reside. Changes to these settings can impact system performance if made improperly. In particular, changes to these settings during "live" operation on game day should be avoided. It is highly recommended you contact CoachComm customer support prior to game day if changes are desired.

- F. **Zoom** – Slider bar and other view options allow you to adjust the magnification of the Home Screen view.
- G. **CU LAN Connection Indicator** – Green illumination of this indicator confirms that the Control Unit and X-Ware are connected and communicating. When not illuminated, an "X" will appear in the indicator meaning the Control Unit is not connected to X-Ware.

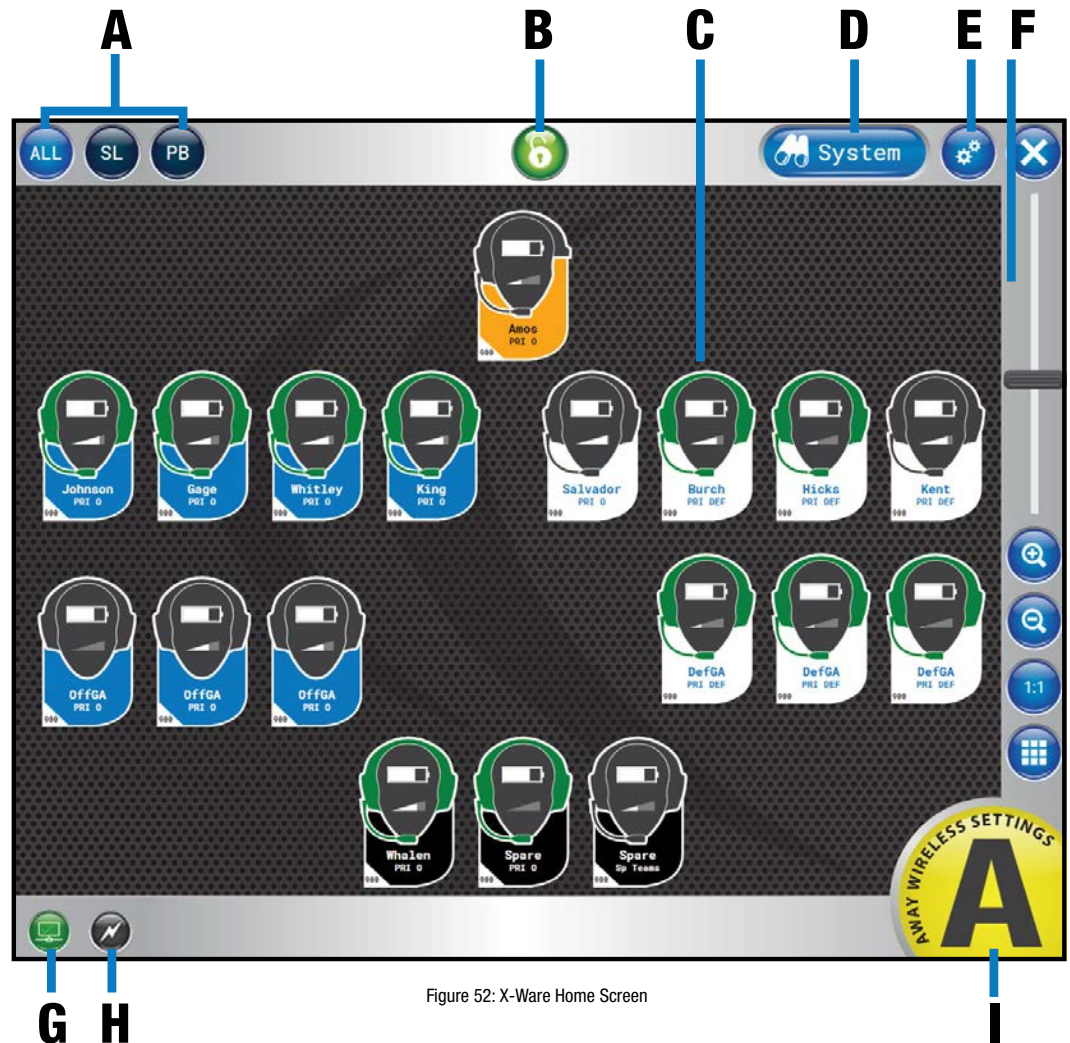


Figure 52: X-Ware Home Screen

- H. **Sideline Cart Power Status Indicator** – X-Ware has no power status indicator for the ATA package or the Wireless Press Box Unit (if used); therefore, this indicator may be absent or may appear grayed out in those configurations. See page 79 for more information about the Wireless Press Box Unit.
- I. **“Away” Indicator** – If your system is set as the “Away” team, a yellow Away indicator will display in the bottom right-hand corner of the Home screen. If your system is set as the “Home” team, no icon will display.

RP Icon

The RP Icon represents each individual Radio Pack on the Home Screen and RP Profile Screen. The icon shape can be customized from the Profile Management tab in X-Ware’s advanced settings; see “Customizing RP Icon” on page 50 for more information about that process. The icon’s headset illuminates green when talk is active. The entire icon will glow red when the RP’s battery is low. The icon color can be customized via the Group Management tab in X-Ware’s advanced settings; see “Customizing Profile Groups” on page 51.

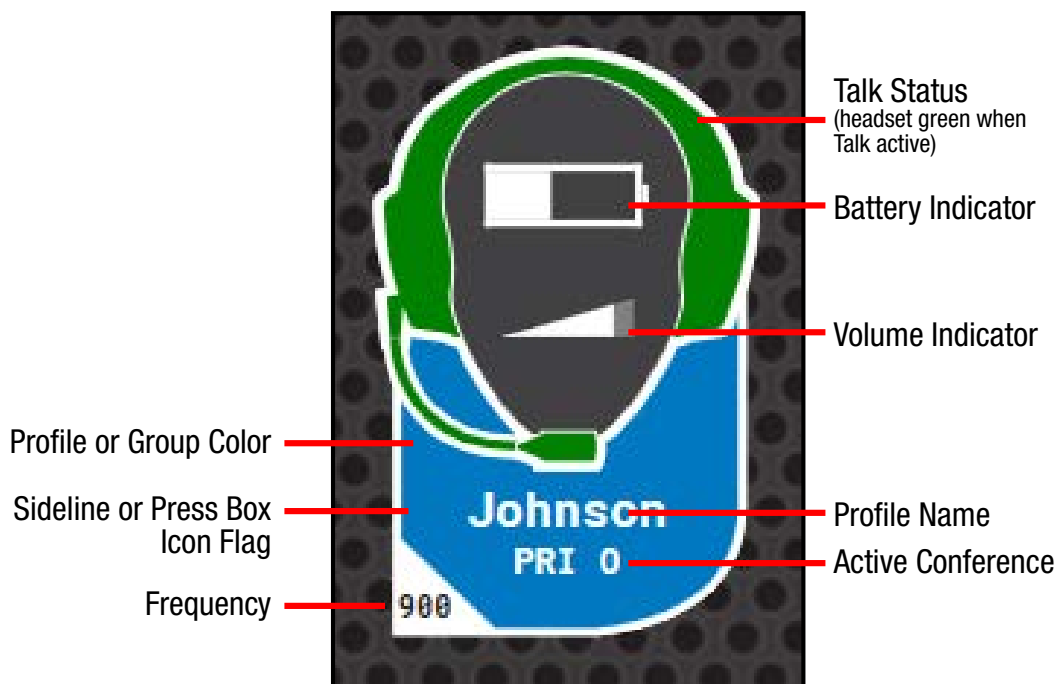


Figure 53: X-Ware RP Icon

Profile Screen

Access the RP Profile screen from the System button or by tapping/clicking on a particular RP icon from the Home screen. This view provides details about the selected RP, including a “live” view of that RP’s real-time display and available conferences. From this screen, you can view the RP status, assign conferences, assign a new profile, view conference members, and show the RP user’s accessibility to other members.



Figure 54: X-Ware RP Profile Screen

Assigning New Conferences

The list of available conferences on the RP Profile Screen displays the conferences currently assigned to that RP’s Profile. An illuminated green indicator shows the RP’s current active conference.

You can quickly edit these assigned conferences by tapping/clicking on any conference and selecting the new assignment from the conference list that displays.

Note: If you change a conference on a profile, all Radio Packs with that profile will change also.

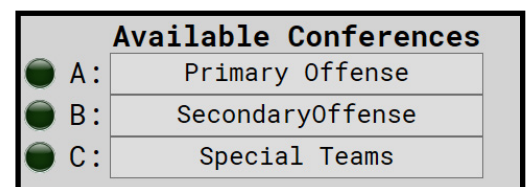


Figure 55: RP Profile Screen’s Available Conferences List

Assigning New Profiles



Figure 56: X-Ware Assign Profile View

The Assign button enables you to quickly assign a new profile to the selected RP. The right-hand list displays the available profiles for the type of RP selected (i.e., only 900MHz profiles will display if you selected a 900MHz RP). To change the profile, tap/click the desired profile from the list. Confirm your selection on the prompt that displays. You can choose whether to load user settings from the new profile or retain the selected RP's current user settings. (User settings include the items listed under the "Modify" view. See "Modify Settings" below for more information.)

If needed, you can also change an RP's profile assignment from the Control Unit menu; see page 57 for more information.

Modify Settings

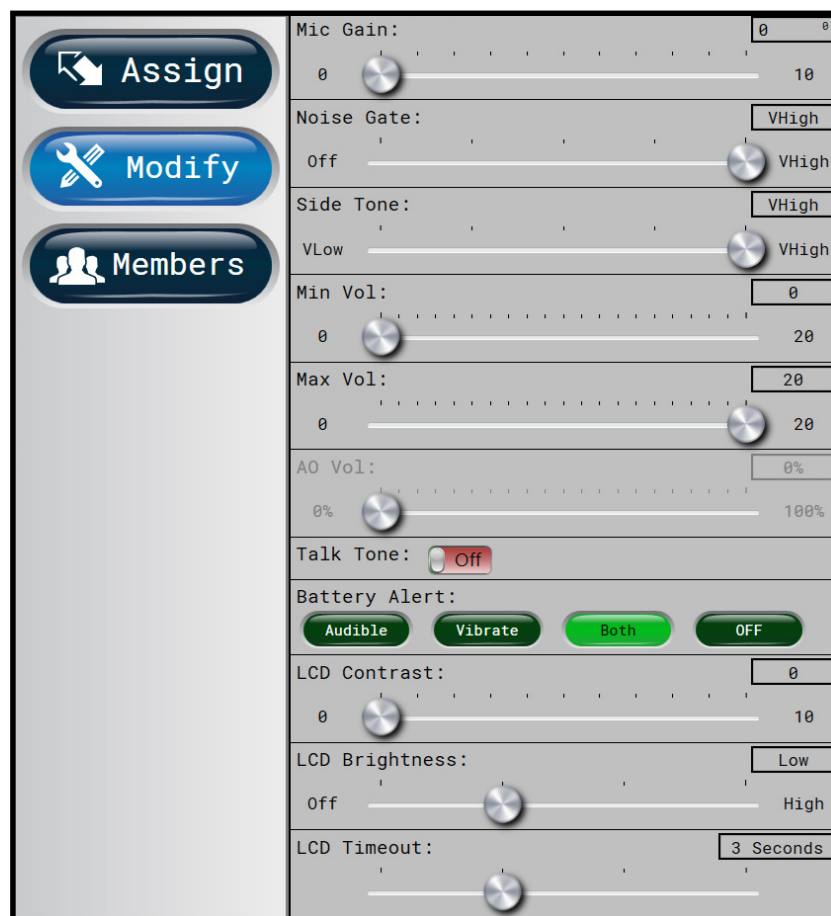


Figure 57: X-Ware Modify Settings View

The Modify button displays a list of User Settings that can be customized for the selected RP. You can choose to retain the profile's default settings or customize the settings once the profile is applied.

Members View

  	Amos	PRI 0	XRP13001
	Gage	PRI 0	XRP13005
	King	PRI 0	XRP13008
	OffenseGA	PRI 0	XRP13012
	OffenseGA	PRI 0	XRP13014
	OffenseGA	PRI 0	XRP13017
	Salvador	PRI 0	XRP13009
	Spare	PRI 0	XRP13015
	Spare	PRI 0	XRP13018
	Whalen	PRI 0	XRP13010

Figure 58: X-Ware Members View

The Members button enables you to view a list of all users the selected RP has access to. Users not on the selected RP's active conference will appear at the bottom of the list, but they will be grayed out.

Clicking one of the users on the list will take you to that user's RP Profile view.

Additional System Views

Radio Transceivers View

 Home  Radio Transceiver  Radio Packs  Conferences  						
900-SLC1	XRP13001 Amos Normal 900Mhz -68 dbm PRI 0	XRP13002 Kent Normal 900Mhz -70 dbm PRI DEF	XRP13003 Johnson Normal 900Mhz -68 dbm PRI 0	XRP13004 Burch Normal 900Mhz -68 dbm PRI DEF	XRP13005 Gage Normal 900Mhz -68 dbm PRI 0	XRP13006 Hicks Normal 900Mhz -68 dbm PRI DEF
900-SLC2	XRP13007 Whitley Normal 900Mhz -70 dbm PRI 0	XRP13008 King Normal 900Mhz -68 dbm PRI 0	XRP13009 Salvador Normal 900Mhz -70 dbm PRI 0	XRP13010 Whalen Normal 900Mhz -68 dbm PRI 0	XRP13011 DefGA Normal 900Mhz -70 dbm PRI DEF	XRP13012 OffGA Normal 900Mhz -70 dbm PRI 0
900-SLC3	XRP13013 DefGA Normal 900Mhz -70 dbm PRI DEF	XRP13014 OffGA Normal 900Mhz -68 dbm PRI 0	XRP13015 Spare Normal 900Mhz -70 dbm PRI 0	XRP13016 DefGA Normal 900Mhz -70 dbm PRI DEF	XRP13017 OffGA Normal 900Mhz -68 dbm PRI 0	XRP13018 Spare Normal 900Mhz -70 dbm PRI 0

Figure 59: X-Ware Radio Transceivers View

The Radio Transceivers view provides information for each RT currently connected to your X-System.

This view also provides another place to view your system's "Home" or "Away" setting. (For more information about this setting see page 56.)

Each RT icon displays the RT's name, hopping pattern, mode, and frequency. Each paired RP displays to the right of its RT icon, and their icons display the device status (green for normal, red for error), RP name, link quality, profile name, and active conference. (The conference displays green when the talk button is active.)

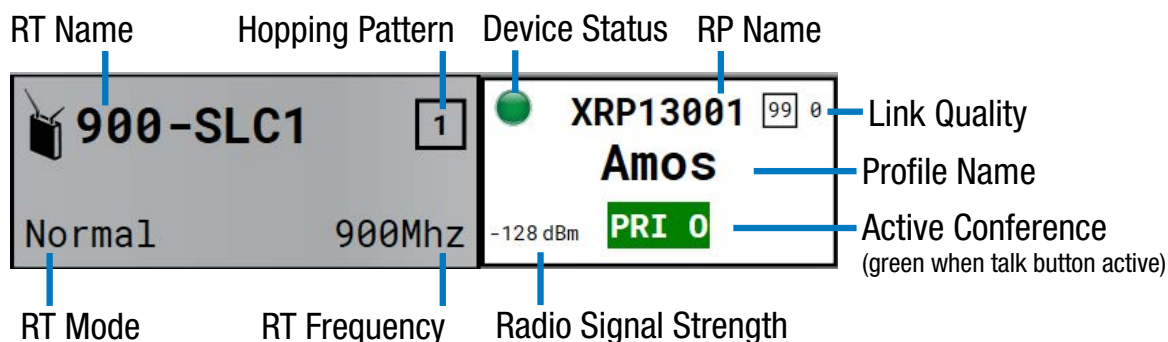


Figure 60: Radio Transceiver View Detail

Radio Packs View

Home

6

Radio Transceiver

Radio Packs

Conferences

All Categories

Sideline

Press Box

Offense

Defense

Technician

RP Profile	Current RT	Talking On	LQ	LQ	RSSI	Batt	Conf A	Conf B	Conf C	Radio Pack
Amos	900-SLC1	PRI 0	96	95	-50 dBm	11h:26m	PRI 0	PRI DEF	Sp Teams	XRP13001
Burch	900-SLC1	PRI DEF	96	94	-60 dBm	11h:26m	PRI DEF	SEC DEF	Sp Teams	XRP13004
DefGA	900-SLC3	PRI DEF	96	95	-70 dBm	11h:26m	PRI DEF	PRI DEF		XRP13016
DefGA	900-SLC3	PRI DEF	96	93	-60 dBm	11h:26m	PRI DEF	PRI DEF		XRP13013
DefGA	900-SLC2	PRI DEF	96	96	-70 dBm	11h:26m	PRI DEF	PRI DEF		XRP13011
Gage	900-SLC1	PRI 0	96	94	-70 dBm	11h:26m	PRI 0	SEC 0	Sp Teams	XRP13005
Hicks	900-SLC1	PRI DEF	96	96	-70 dBm	11h:26m	PRI DEF	SEC DEF	Sp Teams	XRP13006
Johnson	900-SLC1	PRI 0	96	98	-60 dBm	11h:26m	PRI 0	SEC 0	Sp Teams	XRP13003
Kent	900-SLC1	PRI DEF	96	95	-70 dBm	11h:26m	PRI DEF	SEC DEF	Sp Teams	XRP13002
King	900-SLC2	PRI 0	96	98	-70 dBm	11h:26m	PRI 0	PRI 0		XRP13008
OffGA	900-SLC3	PRI 0	96	91	-60 dBm	11h:26m	PRI 0	SEC 0		XRP13017
OffGA	900-SLC3	PRI 0	96	95	-50 dBm	11h:26m	PRI 0	SEC 0		XRP13014
OffGA	900-SLC2	PRI 0	96	90	-70 dBm	11h:26m	PRI 0	SEC 0		XRP13012
Salvador	900-SLC2	PRI 0	96	96	-60 dBm	11h:26m	PRI 0	PRI DEF	Sp Teams	XRP13009
Spare	900-SLC3	PRI 0	96	90	-60 dBm	11h:26m	PRI 0	PRI DEF	Sp Teams	XRP13018

Figure 61: X-Ware Radio Packs View

The Radio Packs view provides a list of active RPs, along with the following information about each one: Profile Name, Current RT, Current Conference, LQ, RSSI value, Remaining Battery Time, Assigned Conferences, and Radio Pack device name.

This list can be sorted by clicking on any column header. You can also filter the list by clicking on **All**, **Sideline**, or **Press Box**, and add additional filter groups if desired by using the Group Management feature. (See page 51 for more information about Group Management.)

You can also click on any RP in the list to access that RP's Profile View.

Conferences View



Figure 62: X-Ware Conferences View

The Conferences view displays a list of the system's conferences and dry pair connections.

Clicking a conference from the list will display the active users on that conference in real time.

This view is also the location of the Auto Null function, which is described in detail on page 58.

Move a conference assignment from one dry pair to another by selecting the dry pair (turning it yellow) and then selecting the new conference assignment. Confirm your change in the pop up that displays. You can also assign conferences to dry pair connections from the CU; see page 57 for details on that process.

X-Ware Advanced Settings

X-Ware's Advanced Settings interface is where the core operational settings for the system configuration reside. Changes to these settings can impact system performance if made improperly. In particular, changes to these settings during "live" operation on game day should be avoided. It is highly recommended you contact CoachComm customer support prior to game day if changes are desired.

Several basic procedures are summarized below, but it is highly recommended you contact CoachComm customer support prior to game day if changes are desired.

Opening a System Configuration File Offline

You can edit a previously saved System Configuration File in X-Ware to make offline edits. You can install X-Ware on a PC other than the trunk PC; see "Installing and Updating X-Ware" on page 61 for that process.

To open a saved configuration file:

1. Hold down the CTRL key on your keyboard and click on the X-Ware desktop icon. (Hold down the CTRL key until the program opens, then release it.) This bypasses the Control Unit connection function, and allows X-Ware to open in an offline state directly to the Advanced Settings view.
2. Click the **Open File** shortcut button in the top left corner of the screen. A windows directory browser will open.

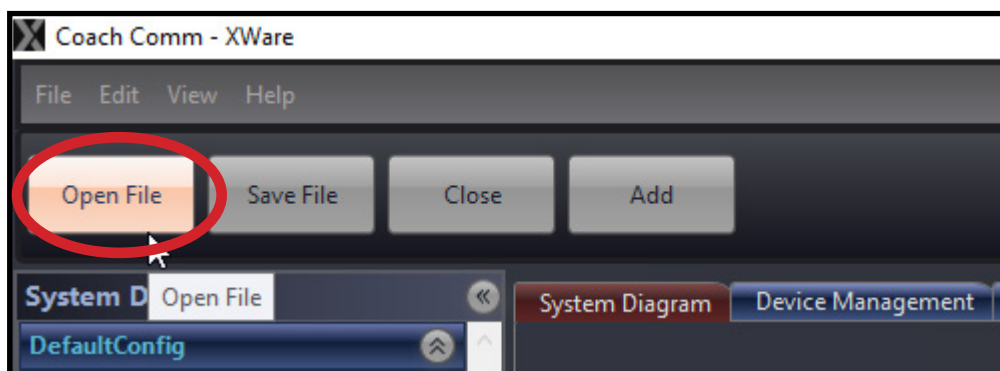


Figure 63: Open Saved .ccf File

3. Navigate to the location of your saved .ccf file, and open it.
4. Use X-Ware's advanced settings functions to make edits to the file. When your edits are done, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.

Adding a Conference

Use the procedures below to add a conference to your X-System configuration. For information on assigning conferences, see “Assigning New Conferences” on page 42 and “Assigning Conferences to Dry Pair Connections (Wired Port)” on page 57.

1. Open X-Ware and access the Advanced Settings window.

Note: You can add a conference to a “live” system or to an “offline” system. If you make the change while offline, you’ll have to first open a saved .ccf file to edit.

2. Click the **Conference Management** Tab. This tab displays a list of the conferences in the open system configuration file.

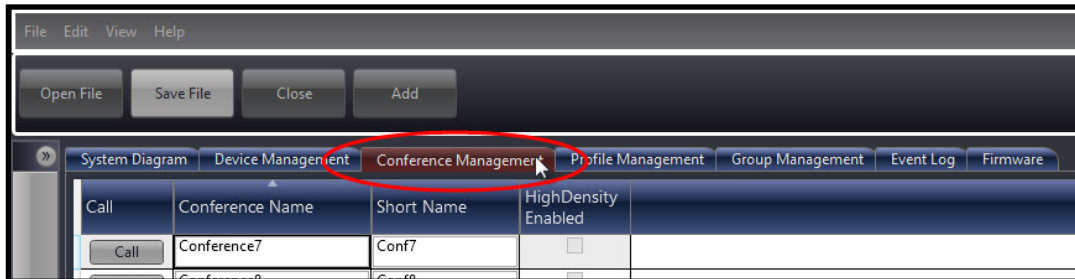


Figure 64: X-Ware Conference Management Tab

3. Click the **Add Conference** button in the bottom left corner of the screen. A new conference will appear in the list.
4. Click in the Conference Name column for the new conference, and type a new long name for the conference. (Limit of 16 characters).
5. Click in the Short Name column, and type a new short name for the conference. (Limit of 8 characters).
6. If you’re editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.




Figure 65: Add Conference Button

Adding a Profile

Use the procedures below to add a profile to your X-System configuration. For information on assigning profiles, see “Assigning New Profiles” on page 43 and “Assign Profiles from the Control Unit” on page 57.

1. Open X-Ware and access the Advanced Settings window.

Note: You can add a profile to a “live” system or to an “offline” system. If you make the change while offline, you’ll have to first open a saved .ccf file to edit.

2. Click the **Profile Management** Tab. This tab displays a list of the profiles in the open system configuration file.

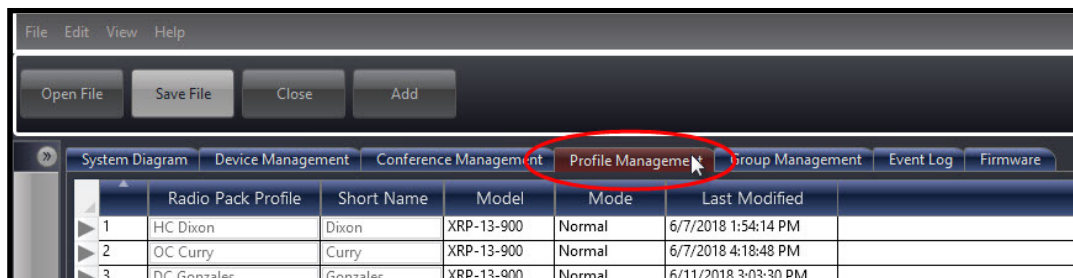


Figure 66: X-Ware Profile Management Tab

3. Click the **Add Profile** button in the bottom left corner of the screen. A new profile will appear in the list.
4. Double-click on the newly created profile. The profile’s detail screen will display.




Figure 67: Add Profile Button

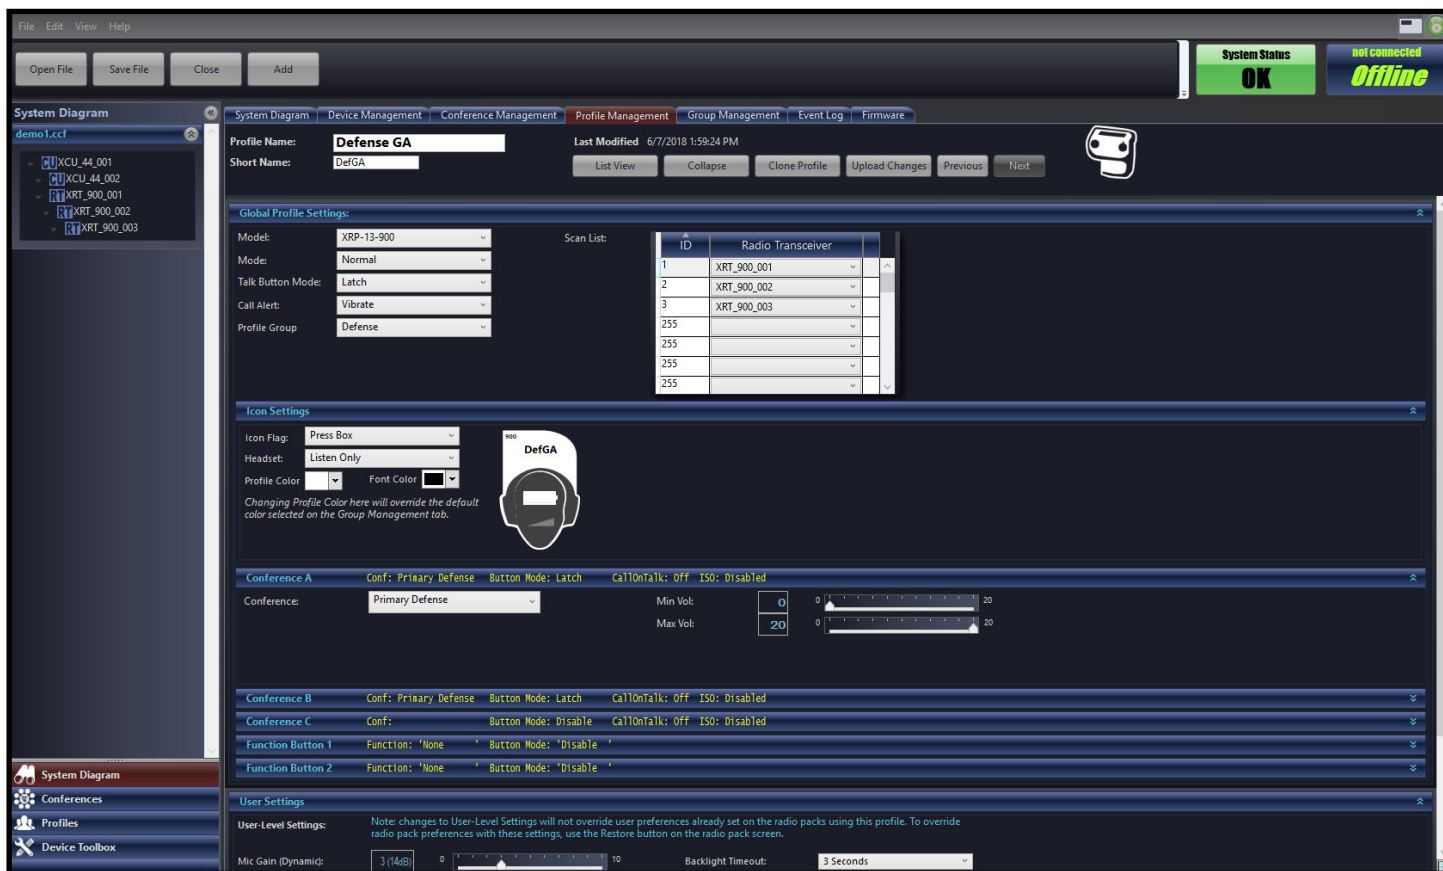


Figure 68: X-Ware Profile Detail Screen

5. Customize the profile settings to fit your needs using the various drop-down and text entry fields on this screen.
Note: Some of the profile settings are not currently used for X-System devices, (e.g., Call Alert and the RP Function Buttons). Leave these fields at their factory default. Other settings are used with X-System, but they **SHOULD NOT** be changed from the factory settings (e.g., Scan List). CoachComm recommends contacting customer support if you have questions about profile settings or configuration details.
6. When your settings are done, click the **Upload Changes** button at the top of the profile detail screen.
7. If you're editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.

Editing or Cloning Profiles

To edit an existing profile, double-click the profile name from the list on X-Ware's Profile Management tab, then complete the desired edit and click the **Upload Changes** button at the top of the profile details screen. In addition, if you're editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.

To create a copy of the profile, click the **Clone Profile** button at the top of the profile detail screen.

Customizing RP Icon

Customize an RP Icon's shape by changing the **Icon Flag**, **Headset**, **Profile Color**, and **Font Color** fields on the relevant Profile's detail view. Changes will be reflected on every RP Icon for Radio Packs using that profile. In addition, if you're editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.

- **Icon Flag:** Choose from **Sideline** or **Pressbox**, and the icon's curved rectangle area will move above or below the icon's face accordingly.
- **Headset:** Choose from **Single**, **Double**, or **Listen-Only**, and the icon's headset will match the selection. (Listen-only removes the headset's boom, and the headset will never illuminate green for active Talk.)
- **Profile Color and Font Color:** Override the colors determined by the Profile's Group assignment by choosing a color from this field. See page 51 for more information about Group assignments.

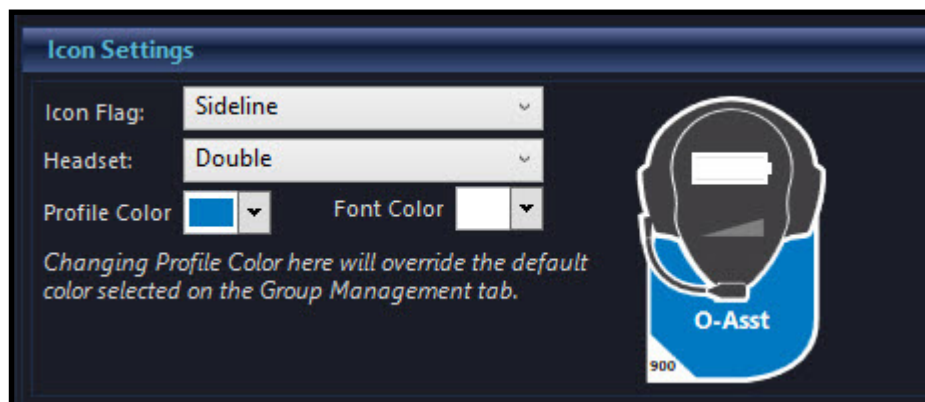


Figure 69: Icon Settings Section of Profile Detail View

Customizing Profile Groups

Use the procedures below to use the Profile Group feature of X-Ware.

1. Open X-Ware and access the Advanced Settings window.

Note: You can add a Group to a “live” system or to an “offline” system. If you make the change while offline, you’ll have to first open a saved .ccf file to edit.

2. Click the **Group Management** Tab. This tab displays a list of the profile groups in the open system configuration file.

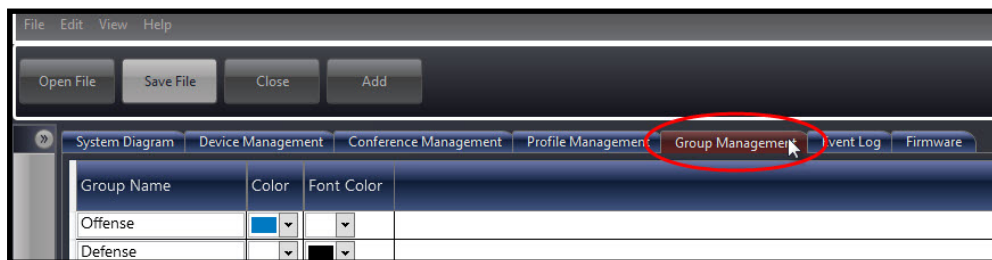


Figure 70: X-Ware Group Management Tab

3. Click the **Add Group** button in the bottom left corner of the screen. A new profile group will appear in the list.
4. Click in the Group Name column for the new group, and type a new name for the group.
5. Open the drop-down color picker in the Color and Font Color columns, and choose a color to represent the group (see Figure 72). This color choice appears on the RP Icons (X-Ware’s Home screen) for profiles with the group assignment.




Figure 71: Add Group Button

Note: Clicking on the color picker’s **Advanced** button opens an alternate window where more advanced color options are available. If desired, you may enter hexadecimal color values for an exact color match to your school colors.

6. To associate profiles with any group, open the profile’s detail view and edit the Profile Group field (in the Global Profile Settings section). See Figure 73.
7. If you’re editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.

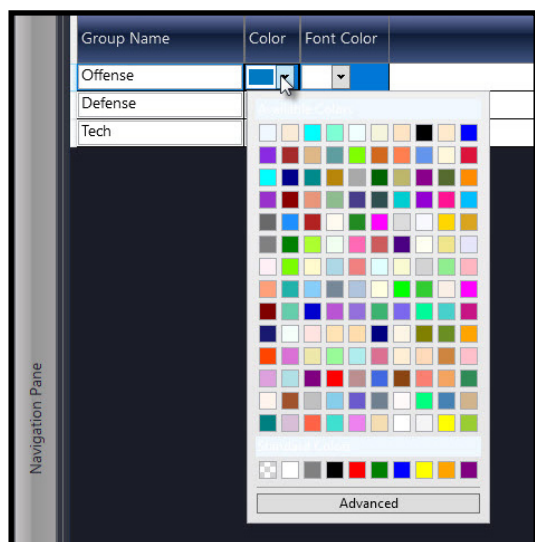


Figure 72: Editing Group Colors

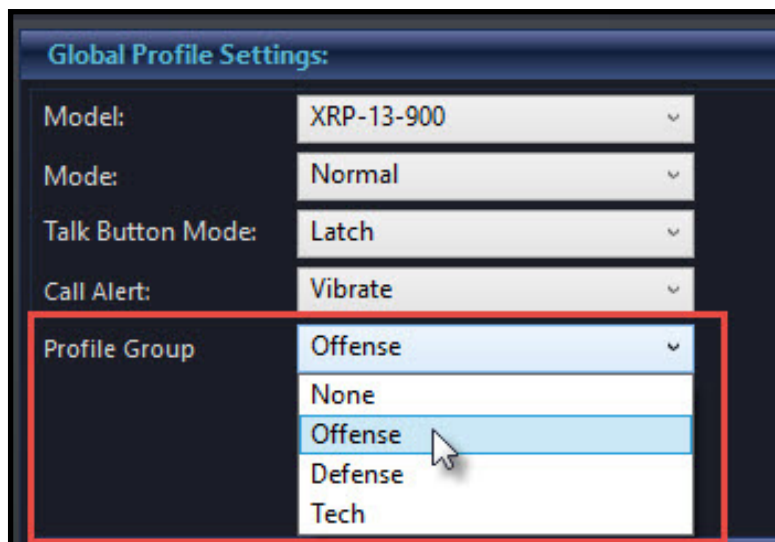


Figure 73: Profile Group Selection - Profile Detail View

Setting Up Audio Overlay

When Audio Overlay is enabled on a Profile's Conference C, the audio from that Conference will be heard in addition to the audio of the pack's active conference (A or B).

Enable this feature beside **Audio Overlay (AO)** on the relevant Profile's detail view (Conference C only). Confirm your change on the prompt that displays. In addition, if you're editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.



Figure 74: Audio Overlay Toggle on Profile Detail View

When Audio Overlay is enabled on a profile, the **AO Volume** field becomes available on the Game Day Interface (Profile Screen > Modify Settings view). This setting determines the overlaid audio's volume as a percentage of the overall RP volume. AO volume is also indicated on the RP Icon above the volume ramp.

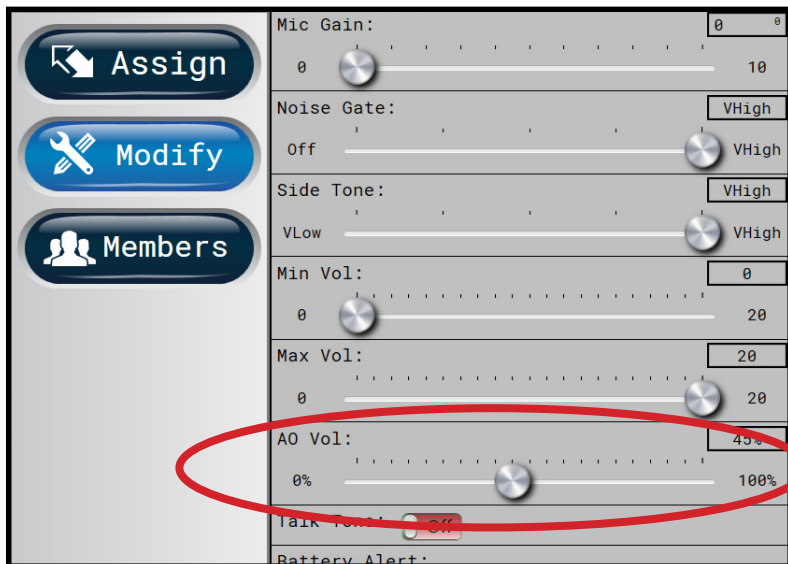


Figure 75: AO Volume Setting on Profile Screen



Figure 76: AO Volume Indicator on RP Icon

Enabling Access Rights

When X-Ware's Access Rights are enabled, a passcode has been set by the system administrator. If X-Ware is locked while access rights are enabled (using the small padlock icon in the center of the Home screen), X-Ware is "view-only" and the passcode is required to unlock the screen.

Use the following procedures to set a system passcode:

1. Open X-Ware and access the Advanced Settings window.
2. Click **Edit** from the X-Ware Menu.
3. Choose **User Access Rights**, then click **Set Passcode**. A dialog box will display.
4. Enter a unique four-digit passcode for your system in the **Passcode** field, then click **OK**.

Note: X-Ware will not require a passcode to unlock if you set the passcode to "0000."

5. If you're editing your .ccf offline, save the .ccf and load it to your top (master) CU using the procedures detailed on page 36.

Note: Your system may already have a default passcode set up from its original factory configuration. If you experience a locked Home screen at startup following a firmware update, use "1111" as the unlock code. After that, you can set up a new passcode in X-Ware Advanced Settings. Call CoachComm Customer Support for assistance if required.

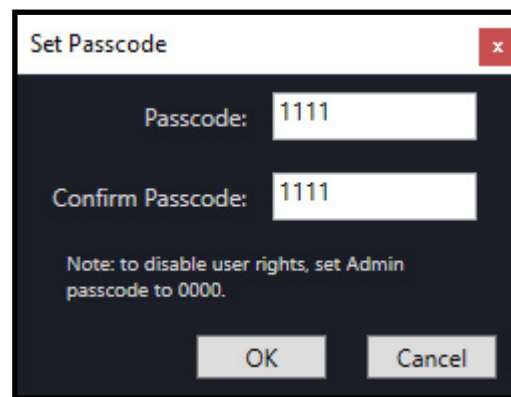


Figure 77: Set Passcode Dialog Box

System Setup and Operation

RT Mast Assembly

The RT mast and bracket system elevates your RTs above obstructions to allow for clear line-of-sight with wireless Radio Packs on the sideline. The Mast extends 12 feet above the ground, and mounted at its top (parallel to the sideline) is an aluminum RT bracket (which supports up to 4 RTs). This bracket system enables all RTs to be mounted at the same height and allows faster setup and takedown since the devices and interconnect cables can remain attached to RTs from week-to-week.

The RTs are connected to the rest of X-System via the provided heavy-duty Cat 5e Ethercon cable. When mounting your mast and connecting your main RT cable, take care to route the cables such that they are not pinched or bent aggressively.



Figure 78: One Sideline Trunk RT Mounting Bracket on the RT Mast (Cables Not Shown)

Important! Use only approved antennas with your RTs to avoid possible FCC violations!

Cover Your RTs

When using your RTs in a wet environment, protect them with a protective enclosure that will not interfere with the RF (for example, a clear plastic bag). CoachComm recommends either covering each RT individually with small bags or covering the whole RT bracket with a large bag. The X-System Radio Transceivers are weather-resistant, including gaskets intended to prevent moisture entry from the top and sides. The Cat 5e cable connection on the bottom is not water tight.

Mast Safety



CAUTION: Please follow these safety considerations each time you deploy your RT mast.

- Be sure that the trunks are stable and level before raising the mast.
- While one person is capable of deploying and raising the mast assembly, it is recommended that this process include at least two people.

Mast Assembly Steps

The following steps are also outlined (and illustrated) in the “Game Day Setup” section on page 8 of this manual.



CAUTION: The following steps should be performed by at least two people.

1. Remove the mast from its storage area and insert it into the hole of the mounting plates.
2. Secure the RT mounting bracket to the top of the mast using the provided pin.
3. Connect the RT cable to the X-NET IN port of the first RT on the bracket.
4. Attach the cable's strain relief to the eye bolt on the mounting bracket.
5. Align the mast so the RT mounting bracket is parallel to the sideline, and secure the mast by tightening the knob on top of the mounting plate.

Note: Be sure not to over-tighten the knob. Use just enough pressure to secure the mast.

6. Bend the antennas so they are parallel to the ground (90° angle between the antenna and the RT) and point their tips toward the opposing team's RT mast.
7. Fully extend the mast, beginning with the top section and locking each section in place as you go.

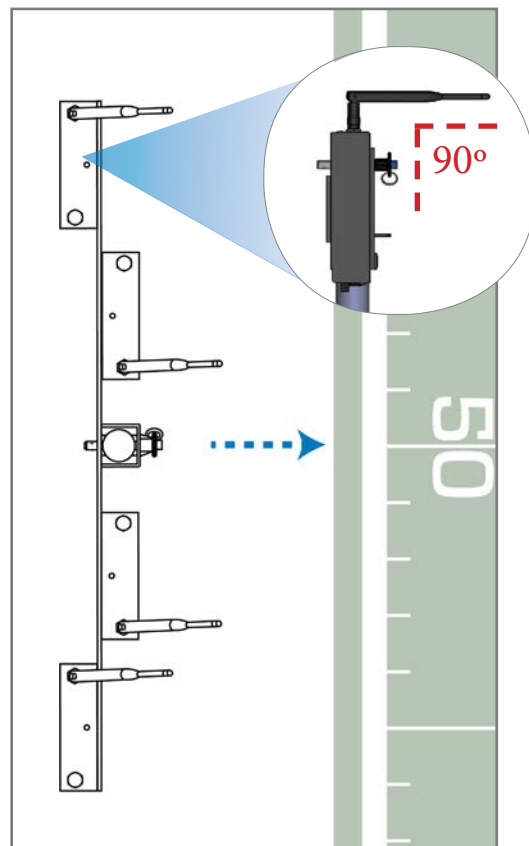


Figure 79: Top View of RT Bracket and Antenna Direction

Connecting the RT Cable

1. Connect the RT cable to the “X-NET Top RT Set” port on the Wireless Trunk's rear patch panel.
2. Connect the stadium's dry pair panel to the corresponding “STADIUM DRY PAIR” ports on the rear patch panel.

Setting Home/Away Status

When you power up the X-System Sideline Trunk, a prompt for selecting “Home” or “Away” displays on the top (master) Control Unit LCD. Based on this setting, all of the RTs on the system will be assigned specific hopping patterns by the Control Unit (CU). It is very important to set this status correctly. Hopping pattern coordination prevents interference between X-Systems. During startup, the configuration file (CCF) will begin loading while the Home/Away prompt is displayed on the top CU. A progress bar shows the load process on the bottom CU. Once the Home/Away prompt is cleared, the CCF load progress can be seen on both CUs. When the CCF load is complete, the home screen will display on the front of the CU(s) and you can proceed.



Figure 80: Control Unit Home/Away Status Prompt

Turning On 2-Wire Ports and Adjusting Levels

Some teams elect to turn off their 2-Wire ports for each Control Unit so they can use the Sideline Trunks alone for wireless communication during practice. **Always make sure that the 2-Wire ports are turned on prior to game day. Failure to do so will result in no communication between wireless RPs and the wired system.**

To turn ports ON:

1. Navigate through the CU menu to **Wired Settings > Intercom Settings**.
2. Select a 2-Wire port, then press the Enter button. A menu of available types will display.
3. Scroll to select **AudioCom**, then press Enter.
4. Verify that the IN level for the port is **-6**.
5. Verify that the OUT level for the port is **+4**.
6. Repeat steps 1–5 for each 2-Wire port of all connected Control Units.

NOTE: 4-Wire ports are not used in standard X-System operation and should be turned off.

To turn ports OFF – Select **OFF** as the port type.

Wired Settings > Intercom Settings							
DEVICE	PORT	TYPE		MK	ECAN	IN	OUT
XCU441	2w1:	A-C	OFF	OFF	ON	- 6 <input type="text"/>	<input type="text"/> +4
	2w2:	A-C	RTS Ch1	OFF	ON	- 6 <input type="text"/>	<input type="text"/> +4
	2w3:	A-C	RTS Ch2	OFF	ON	- 6 <input type="text"/>	<input type="text"/> +4
	2w4:	A-C	AudioCom	OFF	ON	- 6 <input type="text"/>	<input type="text"/> +4
			ClearCom	OFF	ON	- 6 <input type="text"/>	<input type="text"/> +4

Figure 81: Control Unit Intercom Settings Menu

Assigning Conferences to Dry Pair Connections (Wired Port)

You may assign a conference to each dry pair connection for your wired system in the press box. These dry pair connections correspond to the ports on the rear of the CU, and to the thumbwheel settings on the WIMs, so wireless users may access those conferences and communicate with users on wired beltpacks.

There are two ways to assign a conference to a dry pair: Assign the conference via X-Ware. (See page 42 for details on that process.) OR assign the conference via the Control Unit's LCD menu, as detailed below.

1. Press the menu button on the front of the top (master) CU.
2. Use the CU's navigation buttons to find and select **System Configuration > Conferences > Assign to Hardware**.
3. Select a Control Unit port from the list and choose a conference assignment for that port from the list that appears.

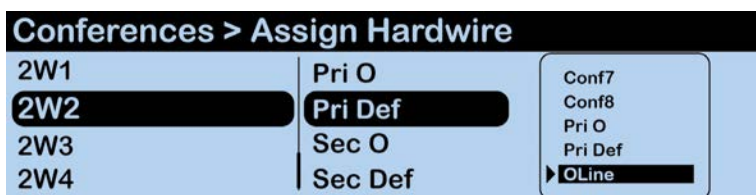


Figure 82: Control Unit Menu - Conference Assignment

4. Return to the CU Home screen and confirm the change via the Conferences view in X-Ware.

Assign Profiles from the Control Unit

If needed, you may change an RP's profile assignment from the Control Unit menu rather than from X-Ware. (For more information about how to do this via X-Ware, see page 43.) Use the following process:

1. Press the Packs button on the front of the top (master) CU.
2. Use the CU's navigation buttons to navigate through the menu screens to **Radio Pack Settings > Sort By _____** (where you choose the identifier to sort by).
3. Select an RP from the list and navigate through the sub-menu that displays to **Device Settings > Radio Pack Profile**.

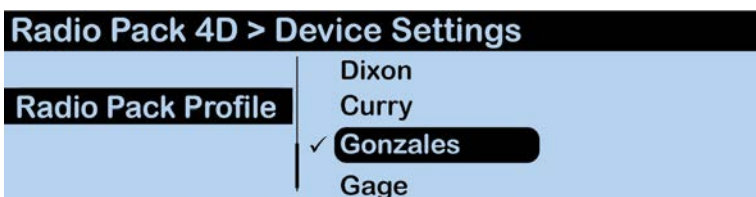


Figure 83: Control Unit Menu - RP Profile Assignment

4. Select a profile from the list to assign to the selected RP. The RP will momentarily log out and lose communication while the profile change takes effect.

Auto Null Process

Nulling is required to electronically balance an audio device, in this case a Control Unit, with a 2-Wire intercom system. The procedures should be performed with at least two people.

Important! This procedure **MUST NOT** be performed while the system is in use in a game environment. This process uses audible tones that will disrupt communication between users.

1. Once the Sideline Trunks are configured, set up and connect power to the Press Box Unit. Have someone stay with the Sideline Trunks to assist in the verification of dry pairs during this step.
2. Connect the dry pair panel in the Press Box to the corresponding ports on the rear of the WIM in the Press Box Unit.
3. Connect the wired BeltPacks and cables for each coach. Make sure all TALK buttons are off.
4. Auto-null all of the lines from the sideline using X-Ware's Conference view (under the System Settings menu). If there is noticeable echo on some channels of the wireless components, confirm that all TALK buttons are off and repeat the auto-null step.

Note: You may also null a system from the Control Unit menu without X-Ware. The **Run Auto Null** command is found under the Wired Settings menu.

X-Ware Auto Null Screens

The Auto Null function is available from the Conferences View in X-Ware. To null a Control Unit, follow the steps below:

1. Select the Auto Null button on the Control Unit you wish to null.
2. Confirm your decision to auto null on the prompt that displays.

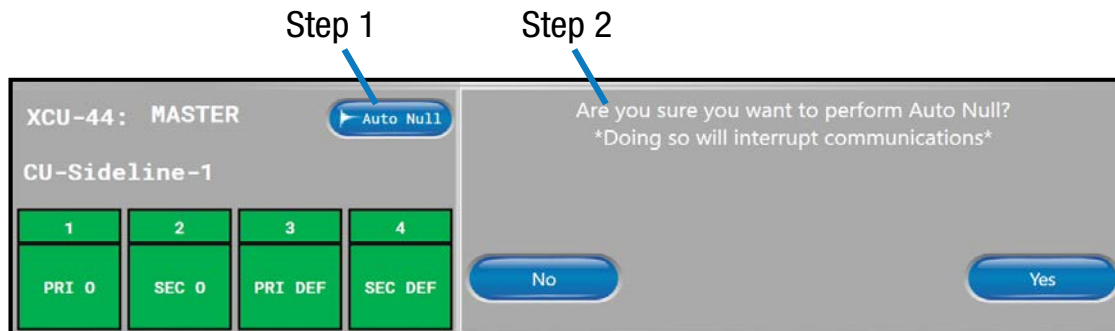


Figure 84: X-Ware Auto-Null Command

3. Once nulling begins, a nulling status screen will display, indicating that null is in process on the Control Unit's port indicated in red.

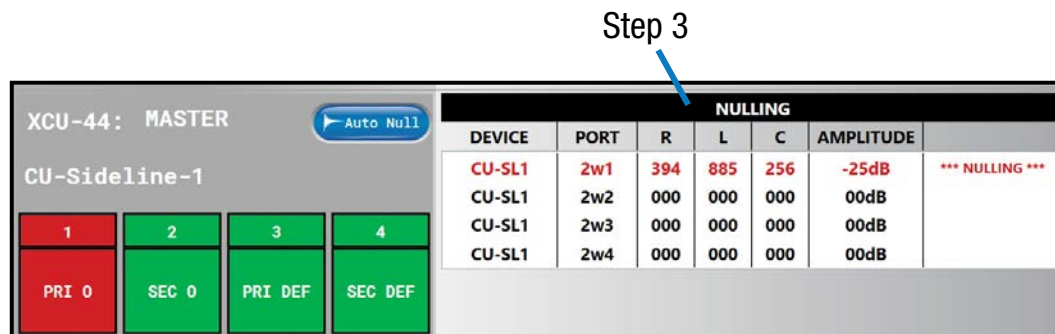


Figure 85: X-Ware Auto-Null In Progress

Walk Testing Your System

Walk testing is very important. If a user only tests the Radio Packs (RPs) while standing still, he may not discover potential frequency problems. Follow the steps below to properly walk test your RPs:

1. On the sideline, install one of the provided, fully charged Lithium-Polymer rechargeable batteries or three AA batteries in each RP.
2. Power on the first two RPs by pressing and holding the Power button on the back of each RP for 3 seconds.
3. Confirm each RP is on the same conference, connect a headset to each RP, and conduct a walk test to confirm their operation. The RP's LQ value can be used to gauge performance. See the following section for more information about LQ values.

Important: Each tester should walk their RPs to opposite goal lines and back, ensuring clear communication between all RPs. Always place the RP on the hip opposite from the press box when walk testing.

4. After walk testing is complete, mute the RP by either turning the Talk button off or raising the SmartBoom PRO mic, then place the RP down on a table or bench. Be sure to place each RP a foot or so apart; bunching RPs together could impact wireless performance.

Important: If raining, cover the RPs or return them to their cases.

5. Repeat steps 2–4 for each of the remaining RPs.
6. Confirm communication between RPs and Wired BeltPacks.

Understanding Link Quality

The Link Quality (LQ) is a numeric value that provides a real-time metric on the quality of communication between the radio in the Radio Transceiver and the radio in the Radio Pack. The LQ serves as a diagnostic tool for proper system operation and troubleshooting Radio Packs.

- With X-System, the receiving LQ signal is reported for both the Radio Transceiver and Radio Pack. The Radio Pack's on-screen LQ indicator with the box around it is the Transceiver's LQ from the RP. If this LQ is lower than normal, then it is an indication that you may have an issue related to interference, the transceiver, or a cable connection. If only the RP's LQ is low, it could be an indication that you may have an issue related to interference or the Radio Pack.
- What should the LQ value be during operation? – There is no exact value that LQ will remain at during system operation. Depending on what degree of outside interference or attenuation (blocking) is present, the LQ will fluctuate during normal operation. Fluctuations in LQ can and will span a wide range of values. The lower the LQ, the poorer the audio quality will be during operation. During start-up, within adequate range and no outside influences present, the LQ should display “99” which is the highest LQ value a Radio Pack or Radio Transceiver can have.
- What if the LQ on a single Radio Pack is below “99” at start-up? – This depends on where the Radio Pack is located at start-up, but if the other Radio Packs on the same Radio Transceiver are at “99” this is a good indication that isolated radio issue exists within that Radio Pack. If the LQ value has dropped considerably lower or if that unit is experiencing poor audio quality it may require service.

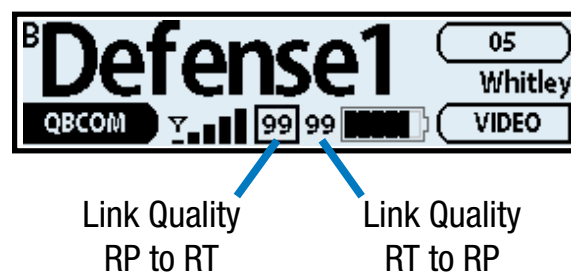


Figure 86: RP Primary Screen LQ Indicator

System Maintenance

Basic Maintenance

CoachComm recommends the following best practices when maintaining your X-System components.

1. At the conclusion of every game, pull the X-System log file from the trunk computer for your records or in the event you need to send the file to CoachComm for support.
2. If the system is exposed to rain, dry all parts of X-System carefully, including cables and connectors.
3. Always make sure that nuts and bolts are secure prior to and after moving or operating.
4. Connect or disconnect cables by holding the connectors (not the sheath of the cable) and pressing the release button if applicable.
5. It is recommended that X-System be stored in a climate-controlled environment when not in use.
6. **Storage Temperature:** If a climate-controlled storage space is not available, X-System equipment can be stored in temperatures ranging from 5° to 130° F. However, when going from cold to warm environments, electronics can form condensation, which can cause damage to the electronic components. If storing your system in these types of conditions, wait for the equipment to acclimate to the ambient temperature before using.

Lithium-Polymer Battery Maintenance

Storage of your Lithium-Polymer Batteries

When stored, a battery gradually loses its overall charge time due to internal self-discharge, which may reduce its overall power. If storing batteries for two or more weeks, CoachComm highly recommends storing them at a 40–50% charge level, which generally minimizes any permanent power capacity loss.

Unused lithium-polymer batteries may enter into a deep discharge state due to internal self-discharge. Once a battery has gone into deep discharge, its onboard circuit protections inhibit the charger from initiating the charge cycle. If a battery does not accept a charge and the LED displays red in the charger, the battery may be in deep discharge. An attempt to revive the battery can be made by repeatedly inserting and removing it several times from the 5-bay charger (CBT-5BAY-01).

Ambient temperature affects the rate at which lithium-polymer batteries degrade. Batteries also degrade and lose overall power capacity if stored (or used) at higher temperatures.

Proper Disposal of Old Lithium-Polymer Batteries

Batteries that appear swollen, deformed, or damaged, or that do not fit properly should never be used. Properly dispose of any batteries in this condition in accordance with the instructions provided by your local authorities. For more information and local drop-off sites, visit <http://www.call2recycle.org/>.

Battery Shipping Regulations

Rechargeable lithium-polymer batteries are subject to special U.S. and International regulations, particularly regarding transportation. The guidelines detailed in CoachComm's [Lithium-Polymer Battery Shipping Guidelines](#) document comply with updated International Air Travel Association (IATA), International Civil Aviation Organization (ICAO), and U.S. Department of Transportation (DOT) Dangerous and Hazardous Goods regulations.

When shipping equipment to CoachComm that includes batteries, it is the shipper's responsibility to ensure that batteries are properly packaged, labeled, and shipped according to local and international guidelines. "Shipper" is defined as the person or school placing the equipment in the package and offering it to the carrier.

Installing and Updating X-Ware

Use the following steps to update the version of X-Ware on your sideline trunk PC or to install an instance on a separate PC.

System Requirements

- Windows 7 or higher
- 4 GB system memory
- Intel Core2 Duo CPU @ 2.67 GHz or better
- 128-megabyte (MB) graphics card
- .NET version 4.5.2

Additional Recommendation

- XGA video screen; 1024 × 768 or greater resolution

Update Procedures

Important! Be sure to save a copy of your current configuration file before updating X-Ware.

1. Locate X-Ware application files on PC at C:\Program Files (x86)\CoachComm\XWare #.#\.
2. Double-click the “Uninstall” application file to open uninstall process.

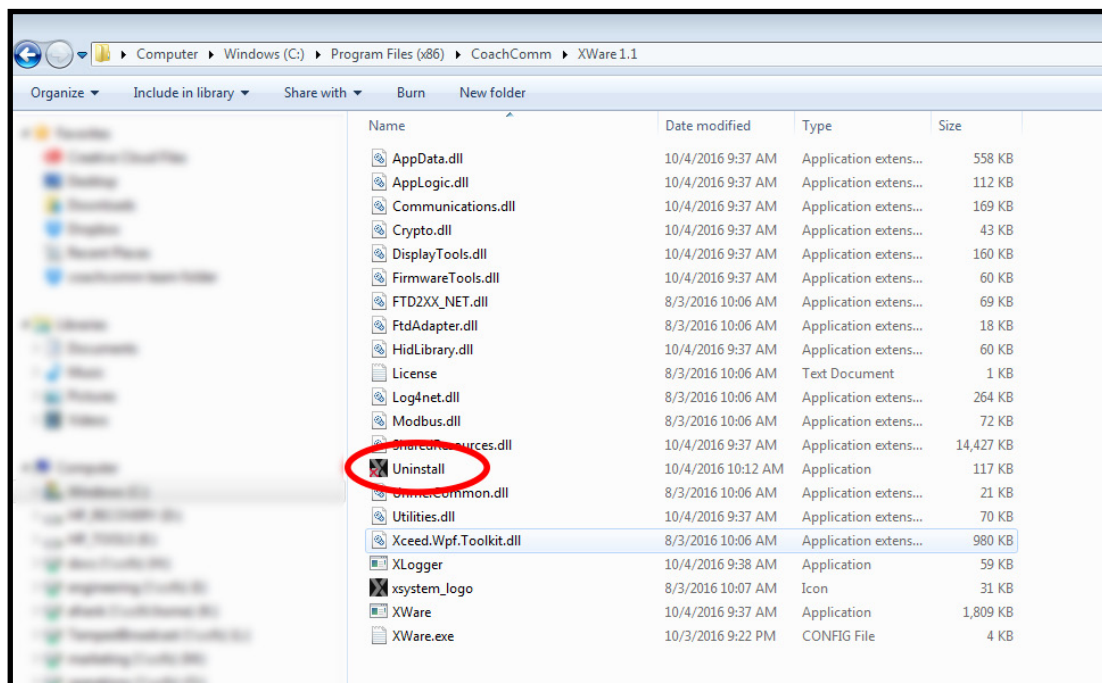


Figure 87: X-Ware Uninstall Application File

- Click **Uninstall** to begin process.

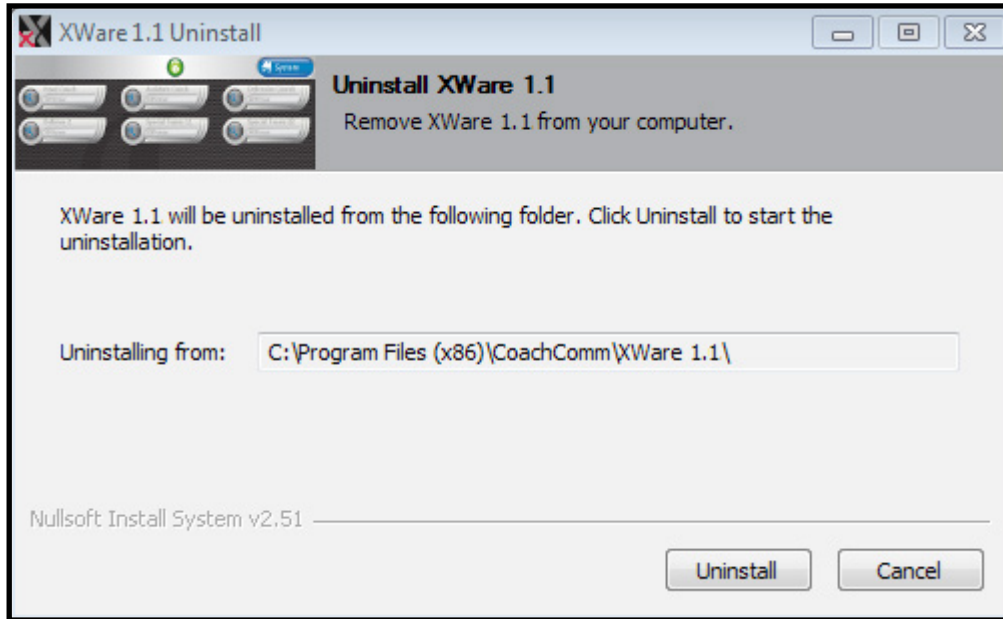


Figure 88: Uninstall Process Screen

- You will be asked to confirm your decision to “Delete all user files.” Click **Yes**.

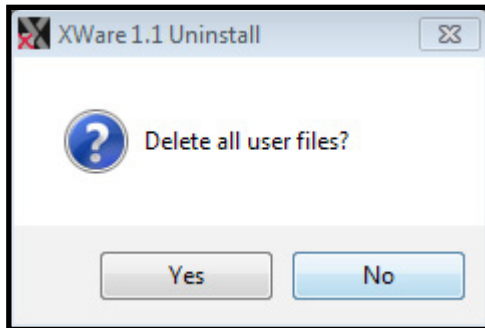


Figure 89: Confirm X-Ware Uninstall Screen

- The uninstall process will complete. Click **Close**. Verify the original X-Ware folder is now empty. If not, delete any remaining files.
- Reboot/restart the PC.

Once you’ve uninstalled X-Ware from the trunk computer, use the following steps to install an updated version of X-Ware.

- Download a copy of the latest X-Ware update from the CoachComm website. (You should receive a link to the exact location in the release announcement).
- Once it is downloaded (likely to your PC’s “Downloads” folder), save the “XWare_Setup_v#.#” file to a removable USB drive.
- Insert your removable USB drive to your sideline trunk’s PC, and double-click on the “XWare_Setup_v#.#” file to run it on the trunk PC. An X-Ware installation prompt window will open.

- On the License Agreement screen, click **I Agree**.

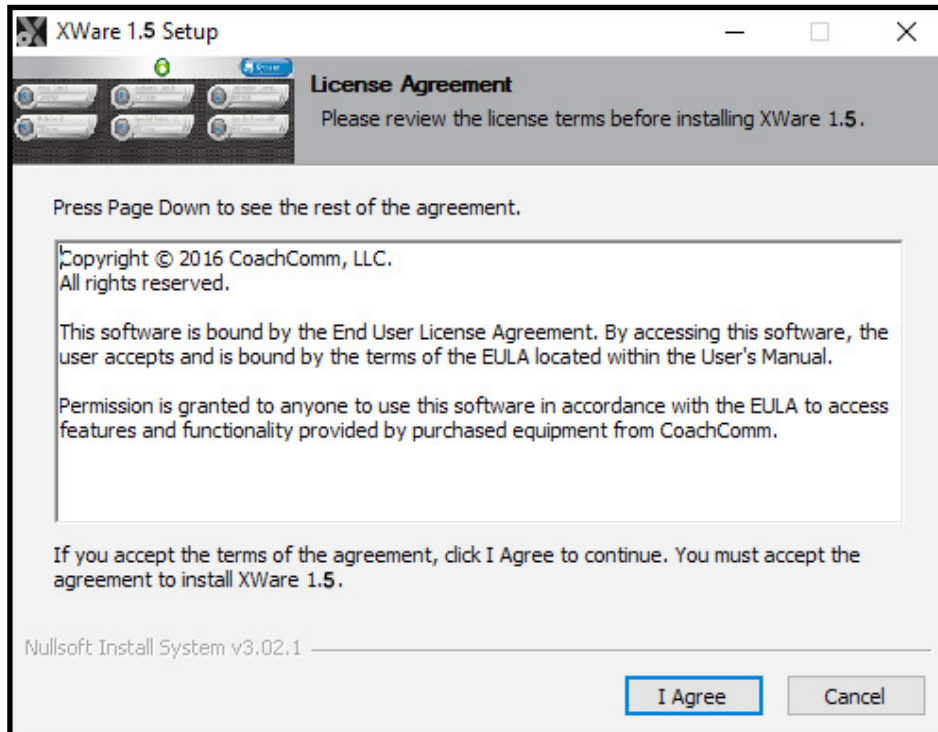


Figure 90: License Agreement Screen

- On “Install Location” screen, click **Next** to install X-Ware into the default destination folder.

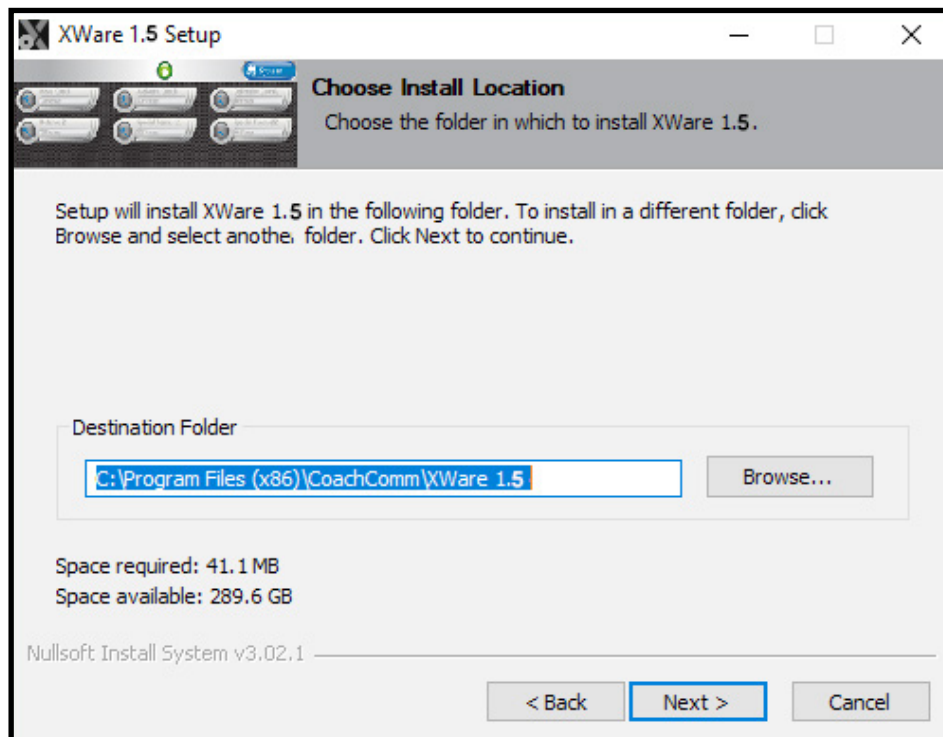


Figure 91: Default X-Ware Destination

- On the “Start Menu Folder” screen, click **Install** to begin install. Installation process will begin and take only a few seconds. Click **Close** when complete.
- An X-Ware icon should have been placed onto the desktop and is ready for use.

Updating Device Firmware

The current firmware package requires connecting devices directly to the PC USB for firmware updates. Update times may vary by device.

IMPORTANT: Always update your Control Unit(s) (CUs) first, followed by your Radio Transceivers (RTs), and then your Radio Packs (RPs).

Prerequisites:

IMPORTANT: Always follow any specific firmware update instructions delivered with the new release. Firmware release notes and any separately published update procedures supersede the information provided below.

1. Make sure that you have saved a backup copy of your CCF and that the most recent version of X-Ware is installed on the cart PC. See page 61 for more information about how to update X-Ware.

Firmware Update Procedures:

1. Connect the Radio Transceivers (RTs) to the system.
2. Power on the Control Units, select **Home** or **Away** from the CU's LCD, and wait for the configuration (CCF) to load. The empty Home screen will display on the CUs' LCDs. The RTs' LEDs will light to indicate that they are receiving power.

Note: If your system includes a spare RT, you can update it after the rest of the system is updated by connecting it in place of one of the other RTs or by locally powering it with an external power supply. You may leave your RTs on the mounting bracket for their firmware update.

3. Verify that all RPs are powered off.
4. On your PC, hold down the CTRL key and double-click on the X-Ware icon. Continue holding down the CTRL key until X-Ware's Advanced Settings window opens.
5. Click on the "Firmware" tab of the advanced settings window. Then, click the "USB Devices" sub-tab.
6. Connect a USB to Micro USB cable from the PC to the top (master) CU (micro end goes into X-Device).

NOTE: CoachComm recommends updating CUs and RTs one device at a time; however, a powered USB hub may be utilized to connect multiple RPs to your PC to update several at a time. Be sure all devices are connected prior to Step 7.

7. Click the **Scan For Devices** button at bottom of the tab.

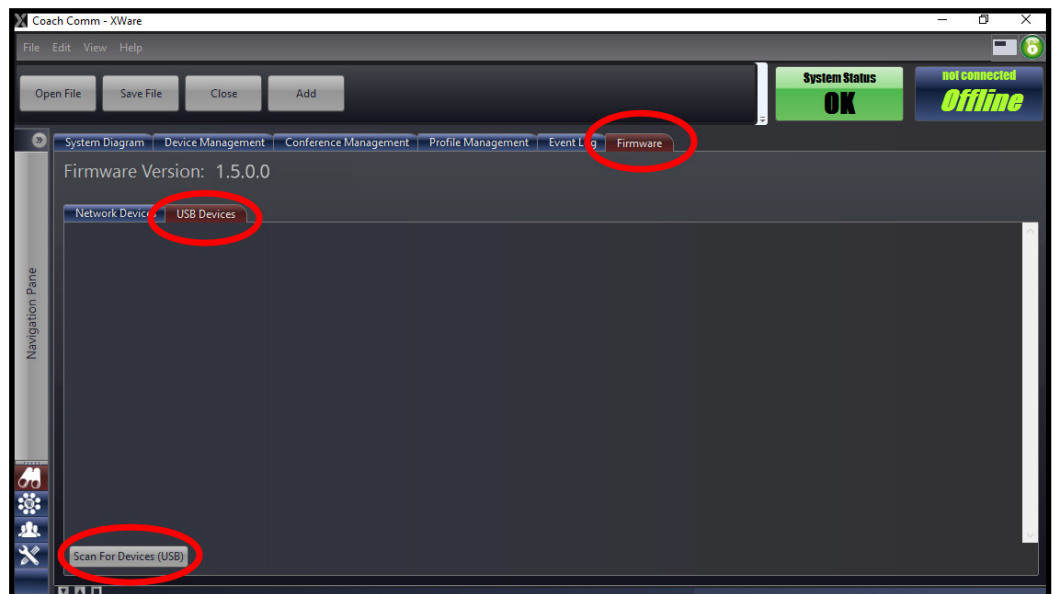


Figure 92: X-Ware Firmware Tab

8. A box for the connected device will display on the tab. This box includes the device's current firmware version.
9. Click the **Update** button. A progress bar will display.
10. Wait for the device to complete its update process. DO NOT disconnect the device or click **Abort** until all of the device's updates are complete and an "Update Complete" message displays in the progress bar. Click the **Clear** button to remove that device from the list.

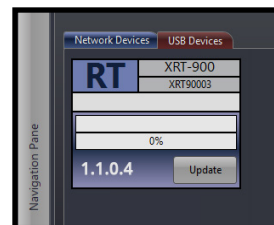


Figure 94: Connected Device

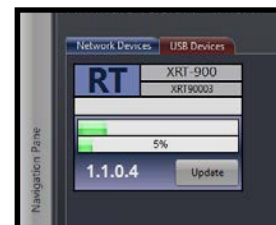


Figure 93: Device Firmware In Progress

Note: When updating RTs, wait for the RX and TX LEDs to finish alternating flashes and return to a normal state before clearing the X-Ware screen and continuing to step 11.

Note: When updating CUs, the CUs will reboot; wait for the CU front panel to display an "Upload Complete" message before clearing the X-Ware screen and continuing to Step 11.

11. Verify the firmware installation by repeating steps 7 and 8 to rescan the device. Confirm that the rescanned device now displays the new firmware version number in the software.
12. Disconnect the USB cable from the device without clicking on anything in X-Ware. Once the device is disconnected, click **Clear/Abort** to remove the device from the Firmware tab.
13. Repeat steps 6–12 above until each Control Unit (CU), Radio Transceiver (RT), and Radio Pack (RP) is updated.
14. Once the update is complete, open your backup CCF in X-Ware by clicking **File** then **Open...**
15. Ensure that the CCF is converted and saved in the v1.5 format by clicking **File** then **Save File As...** and saving it to the cart PC.
16. Close X-Ware, then reopen it, allowing X-Ware to connect to the system and go Live.
17. Upload the converted CCF to your system using the procedures detailed below. (This process is also covered in "Uploading a Configuration File via page 37 of this manual.)

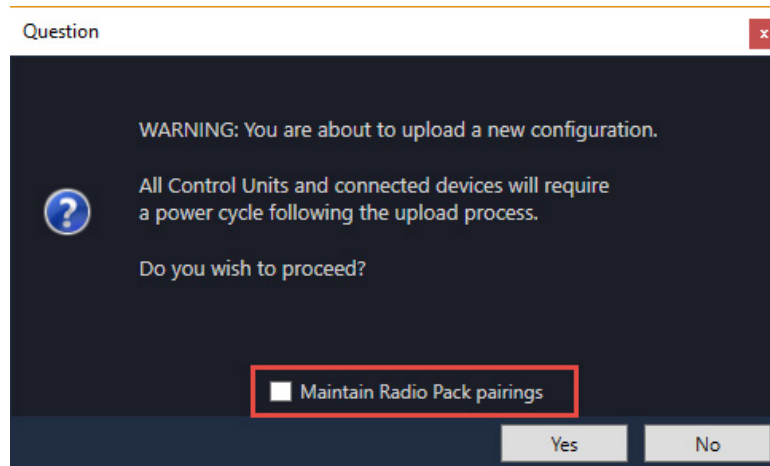


Figure 95: CCF Upload Confirmation Prompt

X-Ware" on

- A. Open X-Ware's Advanced Settings.
- B. Select **Upload File...** from the File menu. A Windows directory will display.
- C. Navigate to your saved CCF's location and select it.

IMPORTANT: When uploading a CCF for the first time after a firmware update, DO NOT check the box beside "Maintain Radio Pack Pairings." You will need to re-pair your RPs to ensure that their settings match the latest firmware and configuration. Once the update is complete, you may recheck this box and leave it checked for future CCF uploads. Repairing is only required when you upload your CCF for the first time after a firmware update.

- D. Follow the X-Ware prompts to complete the upload. While uploading, X-Ware will notify you of any configuration exceptions.
- E. During the upload, X-Ware will disconnect, and you will need to reboot your X-System CUs when prompted by the CU LCD. Close and re-open X-Ware, and it will reconnect once CU startup is complete.
18. Re-pair all RPs by following the procedures on page 32 of this manual.

Troubleshooting Common Issues

Symptom/s	Potential Problem/s	Corrective Action/s
Failed (WIM) Dry Pair Test	Dry pair/stadium wiring	If audio is present on line in question and quality is good, disregard test failure; if not, switch to new pair.
	Bad patch cable	Replace patch cable.
	“Disable” DPT switch is engaged	Change the switch’s position to enable DPT.
Noise/Static/Hum on System or on a Channel	Dry pair/stadium wiring	Move lines with noise to unused, dry pair.
	Faulty ground plug	Move to another outlet, or apply ground isolation adapter to plug.
	Bad wired accessory such as Wired BeltPack, cable, or headset	Process of elimination: remove items on line in question one at a time until problem disappears.
	Bad WAM thumbwheel	Roll thumbwheel(s) to an unused line.
Crosstalk	Dry pair/stadium wiring	Try a new, unused pair.
	Bad wired accessory such as a Wired BeltPack, cable, or headset	Process of elimination: remove items on combined lines one at a time until crosstalk disappears.
	Bad Sideline or Press Box panel (WIM/WAM)	Isolate to Sideline or Press Box by disconnecting dry pair; remove outside components from system; if still present, contact CoachComm Support.
Red LEDs on 5-Bay Charger	Ambient temperature too high to charge (safety mechanism)	Charge indoors or move chargers to a cooler location.
WIM Backlight Out	No local power at unit	Check power cords or find new outlet.
WIM Text not on Display	Connected dry pair before power up	Disconnect dry pair, power cycle system, re-connect dry pair.
WIM Indicators Flashing	Dry pair/stadium wiring	Try a new, unused pair.
Ringdown Not Working	No power (tone)	Check power supply in rear of Wireless Trunk and make sure it has not come unplugged.
	Dry pair/stadium wiring (no ring)	Try a new, unused pair.
Trunk Power/Battery Issue	Loose cord connection	Ensure that all cords are properly plugged into the AC Power Outlet (in the rear of the Wireless Trunk).

Product Support

CoachComm support and service personnel are ready to help you with any issues you may have. CoachComm offers product support from 8:00 a.m. to 5:00 p.m. (CST), Monday through Friday. Customers who annually renew their support plan have access to CoachComm's 24/7 after hours support hotline as well. (Access this line by dialing our voice number and following the automated prompts to the After Hours line.) Our company website, www.coachcomm.com, offers supporting product documentation and live chat for help. All questions and/or requests for a Return Material Authorization (RMA) Number should be directed to the Customer Service department:

CoachComm Customer Service Department

Voice: 1.800.749.2761

Fax: 1.888.329.2658

Email: customer.service@coachcomm.com

Returning Equipment for Repair or Maintenance

Do not return any equipment directly to the factory without first obtaining a Return Material Authorization (RMA) Number. Obtaining a Return Material Authorization Number will ensure that your equipment is handled promptly.

All shipments of CoachComm products should be made via UPS, or the best available shipper, prepaid and insured. The equipment should be shipped in the original packing cart on; if that is not available, use any suitable container that is rigid and of adequate size to surround the equipment with at least four inches of shock-absorbing material.

Battery Shipping Disclaimer: When shipping equipment to CoachComm that includes batteries, it is the shipper's responsibility to ensure that batteries are properly packaged, labeled, and shipped according to local and international guidelines. "Shipper" is defined as the person or school placing the equipment in the package and offering it to the carrier. Refer to CoachComm's [Lithium-Polymer Battery Shipping Guidelines document](#) on our website for more information.

All shipments should be sent to the following address and must include a Return Material Authorization Number:

CoachComm Customer Service Department

Attn: Return Material Authorization #

205 Technology Parkway

Auburn, AL 36830-0500

License Information

Radio Device License Information

Warning: Changes or modifications to this device not expressly approved by CoachComm could void the user's authority to operate the equipment.

1. FCC Notices

- 1.1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference that may cause undesired operation.
- 1.2. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

2. Canada, Industry Canada (IC) Notices

- 2.1. This Class A digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.
- 2.2. Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.
Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.
- 2.3. This radio transmitter (FCCID: HSW-CCT24 & HSW-CCT900, IC: 4492A-CCT24 & 4492A-CCT900) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.
Le présent émetteur radio (FCCID: HSW-CCT24 & HSW-CCT900, IC: 4492A-CCT24 & 4492A-CCT900) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

- 2.4. This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF-Exposure Statements

Radio Packs

X-System Radio Packs have been designed to be worn and used in close proximity to the human body—what the FCC calls a “portable” use.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment is in direct contact with the body of the user under normal operating conditions. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radio Transceivers

The X-System Radio Transceiver has been designed for use as what the FCC calls a “mobile” device.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm (7.87 in.) between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Non-Radio-Device License Information

Warning: Changes or modifications to this device not expressly approved by CoachComm could void the user's authority to operate the equipment.

1. FCC Notices

- 1.1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference that may cause undesired operation.
- 1.2. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

1. Canada, Industry Canada (IC) Notices

- 1.1. This Class A digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations.

Cet appareillage numérique de la classe A répond à toutes les exigences de l'interférence canadienne causant des règlements d'équipement.

X-Ware™ End User License Agreement (EULA)

This End-User License Agreement (the “EULA”) is a legal agreement between you (the “Licensee”), an individual, and CoachComm, LLC (the “Company”), the author of X-Ware (the “Software”), including the deliverables provided pursuant to this EULA, which may include data files, scripts, programs, associated media, printed materials, “online” or electronic documentation.

By installing, copying, or otherwise using the Software, Licensee agrees to be bound by the terms and conditions set forth in this EULA. If Licensee does not agree to the terms and conditions set forth in this EULA, then Licensee may not download, install, or use Software.

Please read this EULA agreement carefully before completing the installation process and using X-Ware. It provides a license to use X-Ware and contains warranty information and liability disclaimers.

This EULA agreement shall apply only to the Software supplied by CoachComm, LLC herewith regardless of whether other software is referred to or described herein. The terms also apply to any CoachComm, LLC updates, supplements, Internet-based services, and support services for the Software, unless other terms accompany those items on delivery. If so, those terms apply.

If you are entering into this EULA agreement on behalf of a company or other legal entity, you represent that you have the authority to bind such entity and its affiliates to these terms and conditions. If you do not have such authority or if you do not agree with the terms and conditions of this EULA agreement, do not install or use the Software, and you must not accept this EULA agreement.

License Grant

- A. **Software Product License.** Subject to the terms of this EULA, Company hereby grants to Licensee a royalty-free, non-exclusive, non-transferable license to possess and to use a copy of the Software. Software is being distributed by Company. Licensee is not allowed to make a charge for distributing this Software, either for profit or merely to recover media and distribution costs.
- B. **Installation and Use.** Licensee may install and use an unlimited number of copies of Software on a shared computer or concurrently on different computers, and make multiple back-up copies of Software, solely for Licensee’s use within Licensee’s business or personal use.

Description of Rights and Limitations

- A. **Limitations.** The user shall use X-Ware strictly in accordance with the terms of the related Agreements and shall not (a) decompile, reverse engineer, disassemble, attempt to derive the source code of, or decrypt X-Ware; (b) make any modification, adaptation, improvement, enhancement, translation or derivative work from X-Ware; (c) violate any applicable laws, rules or regulations in connection with the user’s access or use of X-Ware; (d) reproduce, copy, distribute resell, or otherwise use the software for any commercial purpose; (e) use any other proprietary information interfaces of CoachComm or other intellectual property of CoachComm in the design, development, manufacture, licensing, or distribution of any applications or devices for use with X-Ware.
- B. **Separation of Components.** Software is licensed as a single product. Its components may not be separated for use on more than one computer.
- C. **Software Transfer.** Licensee may permanently transfer all rights under the EULA, provided recipient agrees to the terms of this EULA.

Intellectual Property

All rights, title, interest, and copyrights in and to the Software, including but not limited to all images, photographs, animations, video, audio, music, text, data, computer code, algorithms, and information, are owned by Company. The Software is protected by all applicable copyright laws and international treaties. Therefore, Licensee is required to treat Software like any other copyrighted material, except as otherwise provided for in this EULA.

- A. **Infringement Acknowledgment.** The user and CoachComm acknowledge and agree that, in the event of a third party claim that X-Ware or the user's possession or use of X-Ware infringes any third party's intellectual property rights, the user (and not CoachComm) will be responsible for the investigation, defense, settlement, and discharge of any such claim of intellectual property infringement. You will, however, promptly notify CoachComm in writing of such a claim.

Modifications to X-Ware

CoachComm reserves the right to modify, suspend, or discontinue, temporarily or permanently, X-Ware or any service to which it connects, with or without notice and without liability to the user.

Termination

CoachComm may, in its sole and absolute discretion, at any time and for any reason, suspend or terminate this License and the rights afforded to the user hereunder with or without prior notice. Furthermore, if the user fails to comply with the terms and conditions of this License, then this License and any rights afforded to the user hereunder shall terminate automatically, without any notice or other action by CoachComm. Upon termination of this License, the user shall cease all use of X-Ware and uninstall X-Ware.

Integration

Both parties agree that this EULA is the complete and exclusive statement of the mutual understanding of the parties and supersedes and cancels all previous written and oral agreements and communications relating to the subject matter of this EULA.

Jurisdiction

This EULA shall be deemed to have been made in, and shall be construed pursuant to the laws of the State of Alabama, without regard to conflicts of laws provisions thereof. Any legal action or proceeding relating to this EULA shall be brought exclusively in courts located in Auburn, Alabama, and each party consents to the jurisdiction thereof. The prevailing party in any action to enforce this EULA shall be entitled to recover costs and expenses including, without limitation, attorneys' fees. This EULA is made within the exclusive jurisdiction of the United States, and its jurisdiction shall supersede any other jurisdiction of either party's election.

Non-Transferable

This EULA is not assignable or transferable by Licensee without the prior written consent of Company; any attempt to do so shall be void. Any notice, report, approval or consent required or permitted hereunder shall be in writing and will be deemed to have been duly given if delivered personally or mailed by first-class, registered or certified mail, postage prepaid to the respective addresses of the parties as set forth herein (or such other address as a party may designate by ten (10) days' notice.

Severability

No failure to exercise, and no delay in exercising, on the part of either party, any privilege, any power or any rights hereunder will operate as a waiver thereof, nor will any single or partial exercise of any right or power hereunder preclude further exercise of any other right hereunder. If any provision of this EULA shall be adjudged by any court of competent jurisdiction to be unenforceable or invalid, that provision shall be limited or eliminated to the minimum extent necessary so that this EULA shall otherwise remain in full force and effect and enforceable.

Disclaimer of Warranties

The user acknowledges and agrees that X-Ware is provided on an “as is” and “as available” basis, and that the user’s use of or reliance upon the application and any third party content and services accessed thereby is at your sole risk and discretion. CoachComm and its affiliates, partners, suppliers, and licensors hereby disclaim any and all representations, warranties, and guaranties regarding X-Ware and third party content and services, whether express, implied, or statutory, and including without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement. Furthermore, CoachComm and its affiliates, partners, suppliers, and licensors make no warranty that i) the application or third party content and services will meet your requirements; ii) X-Ware or third party content and services will be uninterrupted, accurate, reliable, timely, secure, or error-free; iii) the quality of any products, services, information, or other material accessed or obtained by you through X-Ware will be as represented or meet your expectations; or iv) any errors in X-Ware or third party content and services will be corrected.

Limitation of Liability

Company shall not be liable to Licensee, or any other person or entity claiming through Licensee any loss of profits, income, savings, or any other consequential, incidental, special, punitive, direct or indirect damage, whether arising in contract, tort, warranty, or otherwise. Even if Company has been advised of the possibility of such damages. These limitations shall apply regardless of the essential purpose of any limited remedy. Under no circumstances shall Company’s aggregate liability to Licensee, or any other person or entity claiming through Licensee, exceed the financial amount actually paid by Licensee to Company for the Software.

Warranty Information

Limited Warranty

X-System™ products are warranted to be free from defects in materials and workmanship for a period of one year from the date of sale to the end user.

CoachComm Cobalt™, Tempest®, and CoachComm Connex® systems carry a two-year product warranty.

The purchase of a maintenance and support plan is not a condition of coverage under this limited warranty; however, purchasing a plan does extend a product's warranty for an additional year.

The sole obligation of CoachComm, LLC during the warranty period is to provide, without charge, parts and labor necessary to remedy covered defects appearing in products returned prepaid to CoachComm, LLC. This warranty does not cover any defect, malfunction, or failure caused by circumstances beyond the control of CoachComm, LLC, including but not limited to negligent operation, abuse, accident, failure to follow instructions in the Operating Manual, defective or improper associated equipment, attempts at modification and/or repair not authorized by CoachComm, LLC, and shipping damage. Products with their serial numbers removed or effaced are not covered by this warranty.

This limited warranty is the sole and exclusive express warranty given with respect to CoachComm, LLC products. It is the responsibility of the user to determine before purchase that this product is suitable for the user's intended purpose. ANY AND ALL IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY, ARE LIMITED TO THE DURATION OF THIS EXPRESS LIMITED WARRANTY. NEITHER COACHCOMM, LLC NOR ANY AUTHORIZED RESELLER WHO SELLS COACHCOMM PRODUCTS IS LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND.

Parts Limited Warranty

Replacement parts for CoachComm, LLC products are warranted to be free from defects in materials and workmanship for 120 days from the date of sale to the end user.

This warranty does not cover any defect, malfunction, or failure caused by circumstances beyond the control of CoachComm, LLC, including but not limited to negligent operation, abuse, accident, failure to follow instructions in the Operating Manual, defective or improper associated equipment, attempts at modification and/or repair not authorized by CoachComm, LLC, and shipping damage. Any damage done to a replacement part during its installation voids the warranty of the replacement part.

This limited warranty is the sole and exclusive express warranty given with respect to CoachComm, LLC products. It is the responsibility of the user to determine before purchase that this product is suitable for the user's intended purpose. ANY AND ALL IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY, ARE LIMITED TO THE DURATION OF THIS EXPRESS LIMITED WARRANTY. NEITHER COACHCOMM, LLC NOR ANY AUTHORIZED RESELLER WHO SELLS COACHCOMM PRODUCTS IS LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND.

Battery Warranty

CoachComm provides a one-year warranty for all CoachComm branded lithium-polymer rechargeable batteries (one year from the date of sale to and purchase by the end user). The warranty period is based upon the expectation that the battery will deliver 80% of its initial capacity after 300 cycles at typical power loads. Lithium-polymer batteries will continue to operate below 80% capacity threshold; however, the capacity (run time) delivered between charges will continue to decrease. Apart from this warranty, batteries are also covered as part of the customer's annual maintenance plan (where applicable).

Glossary

AudioCom® XLR Terminations – See Figure 96.

Balanced Audio – A form of transmitting a wired signal. Balanced systems use two wires for each talk line. The audio is out of phase 180 degrees from one wire to the other. In this way, noise can be filtered out more easily. Balanced audio is usually much less susceptible to hum and interference from long cable runs.

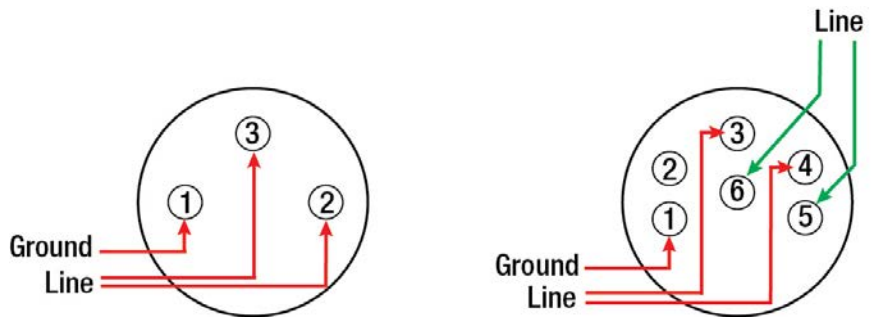


Figure 96: XLR Terminations

Conference – A grouping of audio entities. Wireless Radio Packs may subscribe to one or more Conferences.

Dry Pair – A twisted pair of wires, typically connecting between the press box and the sidelines. For the Telex® AudioCom® system operating from power on one end only, this wire should be 26 gauge or better.

Mic Gain – Increase in the power of the signal from the microphone

Mic Type – Either electret or dynamic, determined by user selection or system auto-detection

Noise Gate – Dynamic processor that suppresses unwanted noise present when the audio signal is at a low level

Profile – A Radio Pack Profile assigns functionality to a Radio Pack's local controls, knobs, and buttons as well as what Conferences they subscribe to.

RJ-14 – A telephone jack used to make connections with dry pair. By definition, the RJ-14 has two pair (i.e., four wires). It is often confused with an RJ-11 (two wires). Some phone technicians will call these RJ-11 4 wire jacks. Please note the unique wiring of the RJ-14 for the X-System application in Figure 97.

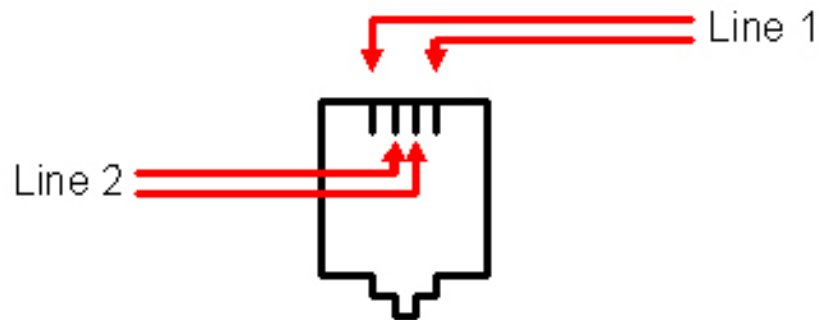


Figure 97: RJ-14 Wiring

Sidetone – The user's own voice folded back into the user's ear. This adjustment allows for a user to hear more or less of his/her own voice in his/her headset.

If sidetone is turned down, the user can still hear other users but he/she cannot hear his/her own voice. If the sidetone is turned up too far, the user may cause "feedback" or squealing on his/her intercom line.

Specifications

***Notice About Specifications:** While CoachComm makes every attempt to maintain the accuracy of the information contained in this manual, this information is subject to change without notice. Please check our website for the latest system specifications and certifications.

Sideline Trunk Specifications

System Specification	Detail
Sideline Trunk Length:	30.25 in.
Sideline Trunk Width:	23.75 in.
Sideline Trunk Height:	43.23 in.
Sideline Trunk Weight:	Wireless Trunk: 270 lb. Monitor Trunk: 340 lb.
Tire Type:	Solid
Tire Size:	8 in. Caster
Power Requirements:	At a minimum, one dedicated 15 amp 120V circuit
Mast Height (Extended and mounted between Trunks):	12 ft.

Mast and RT Case Specifications

System Specification	Detail
Length:	67.73 in.
Width:	20.23 in.
Height:	11.54 in.
Weight:	130 lb.

Control Unit Specifications

Control Unit Specification	XCU-44
Hardwired Intercom Audio Channels (per CU)	8 (four 2-wire and four 4-wire)
Active Radio Packs (Normal Mode) (per CU)	18 (18 active Normal Mode Radio Packs requires use of 3 RTs.)
No. of Paired Radio Packs Supported (per CU)	256
USB Ports	(1) USB Type A; (1) Micro USB
Front Panel LCD Display	512 × 128 resolution
Stage Announce and GPO Closures	5 Relays via DA-15
X-Net Ports (supports 2 connections)	(2) RJ-45 for copper; (1) duplex LC for Single Mode Fiber
Sync In Ports (supports 1 connection)	(1) RJ-45 for copper; (1) duplex LC for Single Mode Fiber
2-Wire Intercom Connection	4 channels via XLR 3F with XLR 3M loop (4 ports)
2-Wire Compatibility	Clear-Com, RTS, and AudioCom (Balanced)
4-Wire Intercom Connection	4 ports via RJ-45
Stage Announce Output	XLR 3M, nominal 12 dBu into 600 ohms, balanced, transformer isolated
AUX IN	1/4" (6.35 mm) 3 conductor jack, 17.5 dBu max in, balanced, transformer isolated
AUX OUT	1/4" (6.35 mm) 3 conductor jack, 12 dBu into 600 ohms, balanced, transformer isolated
LAN Port	(1) RJ-45
Power Input/Connector	100–240V ~ 50–60 Hz, 1.8A
Dimensions	1 RU, 19 in. × 1.73in. × 11.68 in. (48.3 cm × 4.4 cm × 29.7 cm) metal enclosure
Weight	6.5 lbs (2.9 kg)
Operating Environment	-20° to 50° C (-4° to 122° F); 10% to 90% Humidity.
Maximum Line Length	Copper 330 ft. (100 m); Fiber 32,800 ft. (10,000 m)
Maximum Altitude	6,562 ft. (2,000 m)
RoHS Compliant	Yes

Radio Transceiver Specifications

Radio Transceiver Specification	XRT-900	XRT-2400
RF Frequency (MHz)	902–928 MHz	2400–2483 MHz
RF Scheme	FHSS with TDMA	
Effective Radiated Power	400 mW (+26dBm)	100 mW (+20dBm)
Receiver Sensitivity	-100 dBm at 10^{-5} BER	
Radio Certification	FCCID: HSW-CCT900 and IC: 4492A-CCT900	FCCID: HSW-CCT24 and IC: 4492A-CCT24
Transmission Range	650 ft. (200 m) under typical conditions; 1950 ft. (600 m) line of sight (Note: Functional range depends on many variables, including RF signal absorption, reflection, and external interference.)	500 ft. (150 m) under typical conditions; 1500 ft. (450 m) line of sight (Note: Functional range depends on many variables, including RF signal absorption, reflection, and external interference.)
No. of Radio Packs Supported (when RT in Normal Mode)	6	
Number of Antenna Connections per Transceiver	2	
Antenna Connector Type	RP-TNC	
Supplied Antenna	+2dBi Omni-directional (whip)	
X-NET IN Port (supports 1 connection)	(1) RJ-45 for copper; (1) duplex LC for Single Mode Fiber	
RT LOOP Port	(1) RJ-45	
Maximum Line Length	Copper 330 ft. (100 m); Fiber 32,800 ft. (10,000 m)	
Network Power	X-Net RJ-45 only	
External Power	48VDC Power Supply (Sold Separately)	
Dimensions without Antennas (inches)	6.30 in. × 7.74 in. × 1.81 in. (16 cm × 19.7 cm × 4.6 cm)	
Weight	1.25 lbs (567 g)	
Operating Environment	-20° to 50° C (-4° to 122° F); 10% to 90% Humidity	
Maximum Altitude	6,562 ft. (2,000 m)	
RoHS Compliant	Yes	

Radio Pack Specifications


Radio Pack Specification	XRP-13-900	XRP-13-2400
RF Frequency (MHz)	902–928 MHz	2400–2483 MHz
RF Scheme	FHSS with TDMA	
Effective Radiated Power	400 mW (+26 dBm)	100 mW (+20 dBm)
Receiver Sensitivity	-100 dBm at 10^{-5} BER	
Radio Certification	FFCCID: HSW-CCT900 and IC: 4492A-CCT900	FFCCID: HSW-CCT24 and IC: 4492A-CCT24
Transmission Range	650 ft. (200 m) under typical conditions; 1950 ft. (600 m) line of sight (Note: Functional range depends on many variables, including RF signal absorption, reflection, and external interference.)	500 ft. (150 m) under typical conditions; 1500 ft. (450 m) line of sight (Note: Functional range depends on many variables, including RF signal absorption, reflection, and external interference.)
Audio Dynamic Range	Greater than 90 dB	
Audio Frequency Response	150 Hz–7 kHz	
Conferences	3	3
Simultaneous Listen Paths	1	1
Volume Knobs	1	1
Talk Buttons	1	1
Headset Connector	4-pin male XLR	
USB Port	(1) Micro USB	
Microphone Type	Auto Detect or Manual Select; Dynamic or Electret	
LCD Display	280 × 64 resolution	
Antenna (internal)	(2) 2dBi Dipole	
Battery Life, Rechargeable Lithium-Polymer	Greater than 9 hours	Greater than 10 hours
Charging Power Supply	Micro USB; 6W AC wall adapter	
Charge time for Lithium-Polymer Battery	Under 3 hours	
Optional Power	3 Standard AA alkaline batteries	
Battery Life, Alkaline batteries	Approximately 4.5 hours	Approximately 5 hours
Dimensions (inches)	4.5 in. × 4.57 in. × 2.31 in. (11.4 cm × 11.6 cm × 5.9 cm)	
Weight (with Lithium-Polymer battery)	13 oz. (910 g)	
Material	Polycarbonate substrate with thermoplastic elastomer overmold	
Operating Environment	-20° to 50° C (-4° to 122° F); 10% to 90% Humidity. RP Power Adapter is 0 to 40° C (32° to 104° F).	
Maximum Altitude	6,562 ft. (2,000 m)	
RoHS Compliant	Yes	
IP-65 Rated	Yes	

Appendix A: Wireless Press Box Unit

Sideline to Wireless Press Box Unit (System Diagram)

See page 14 for more information about the Wireless Press Box Unit. See page 12 for more information about the Wireless Trunk Patch Panel.

Wireless Press Box Unit

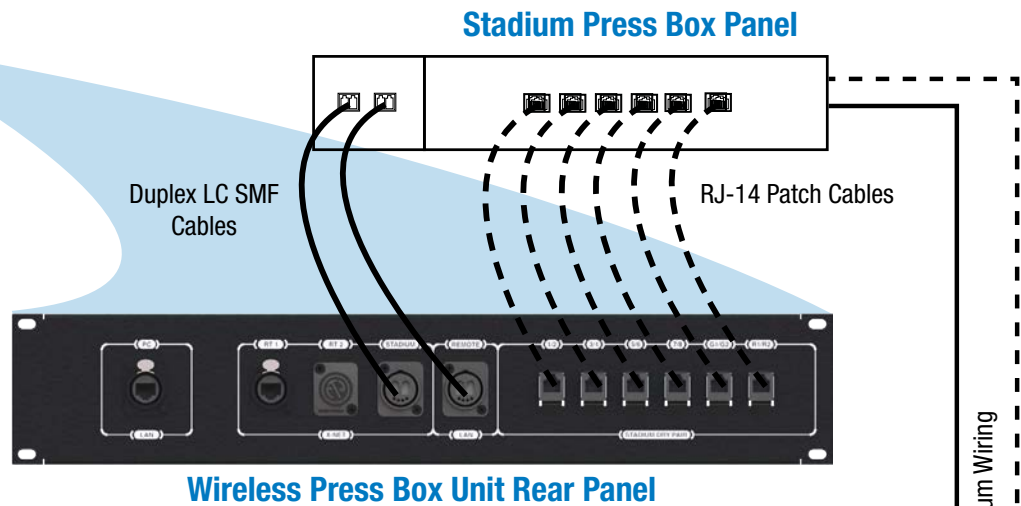

Sideline Wireless Trunk

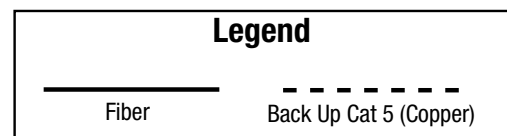
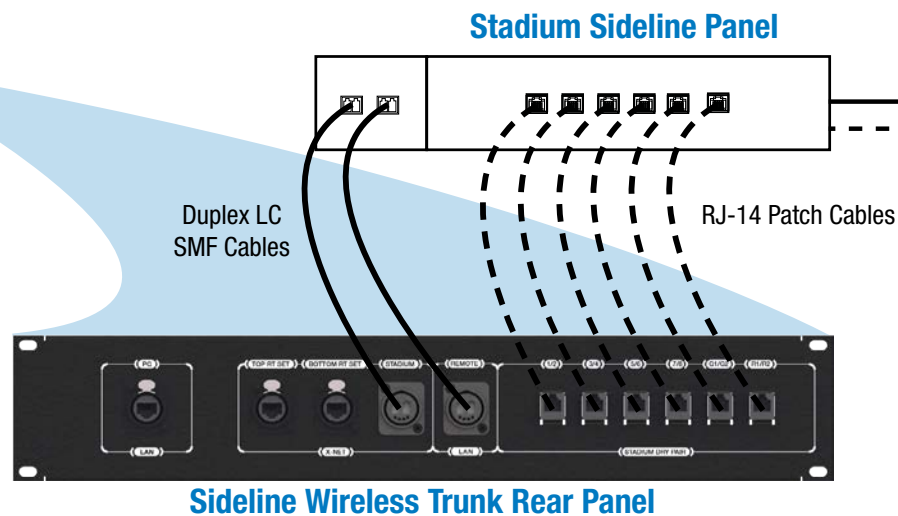


Figure 98: Sideline to Wireless Press Box Unit (System Diagram)

Wireless Press Box Unit Overview

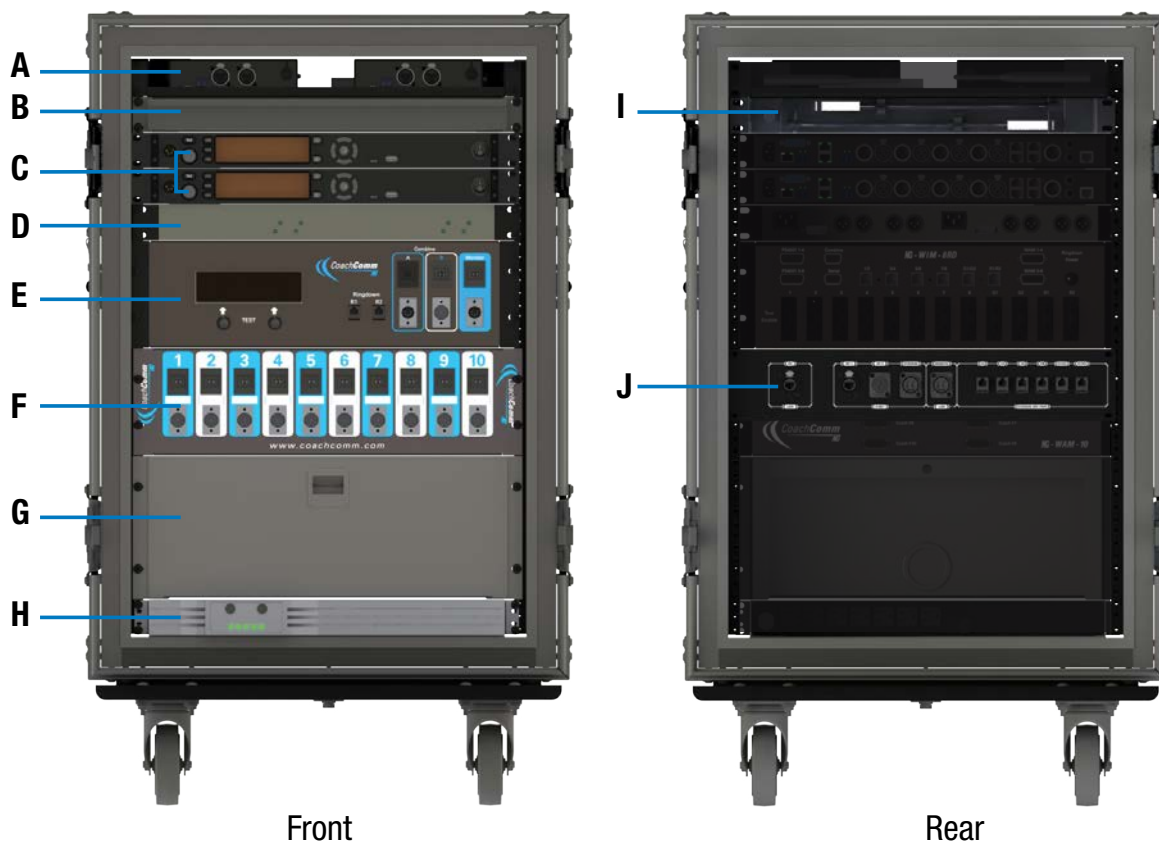


Figure 100: Wireless Press Box Unit Front View

The Wireless Press Box Unit is a trunk that is placed in or near the coach's box. The Wireless Press Box Unit houses its own separate X-System wireless gear, a WAM 10 wired assignment module, a WIM 8 wired interface module, and intercom power supplies. On the inside rear of the unit, connections are available for the dry pair (via spring jacks or RJ-14s) and for the single mode fiber (via LC duplex pair into Neutrik OpticalCon Duo connectors).

The Wireless Press Box provides more customization for booth coaches by using a Radio Pack similar to the field coaches. In addition, it offers the ability to connect to the sideline via fiber optic cabling, which provides remote access to X-Ware as well as a more secure and clearer audio path from the press box to the field.

- A. **X-System RTs** (See page 25 for more information.) These RTs are not removable, they function from within the trunk.
- B. **Tablet PC Drawer**
- C. **X-System Control Unit(s) (CUs)** (See page 21 for more information.)
- D. **PS-4001 AudioCom® Power Supply(s)** (See page 14 for more information.)
- E. **Wired Interface Module (WIM)** (See page 15 for more information.)
- F. **Wired Assignment Module (WAM)** (See page 18 for more information.)
- G. **Radio Pack Drawer:** Provides storage for Radio Packs
- H. **Uninterruptible Power Supply (UPS)** (1RU) (See page 20 for more information.)
- I. **LED Work Lights**
- J. **Rear Patch Panel:** Contains LAN, RT, dry pair, and fiber connections (See page 82 for more information.)

Wireless Press Box Rear Patch Panel

The Wireless Press Box Unit's rear patch contains the X-Net connections for RTs, LAN connection, and Stadium Fiber and Dry Pair ports. See the details below about each connection on the panel.

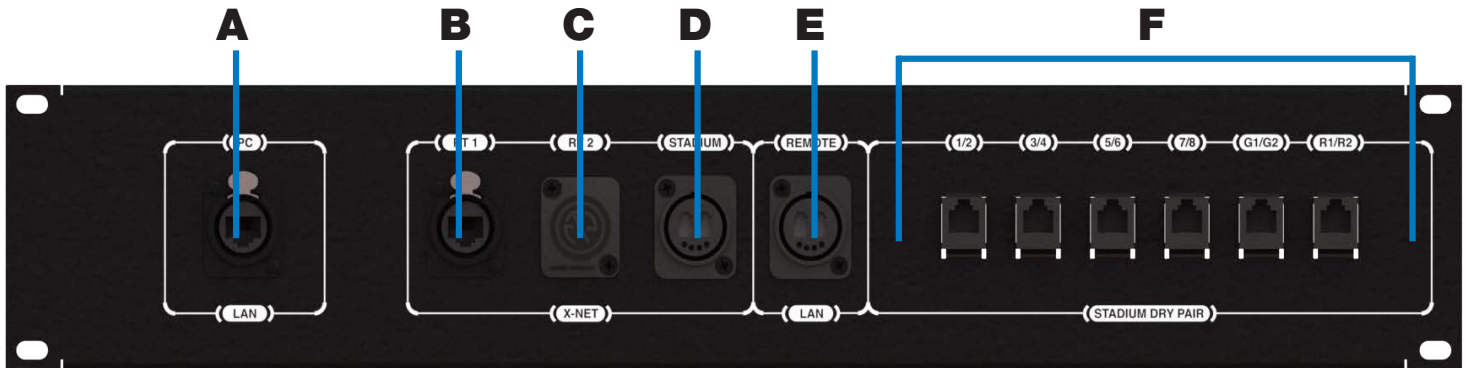


Figure 101: Wireless Press Box Rear Patch Panel


- A. **PC LAN:** Alternate Cat 5e (or greater) connection for the Wireless Press Box Unit's tablet. Disconnect the tablet from its drawer connections and connect a longer cable to this port on the panel if you want to relocate the tablet elsewhere in the press box.
- B. **RT 1:** Cat 5e (or greater) connection for a third, spare RT.
- C. **RT 2:** This connection is not currently used with X-System.
- D. **STADIUM:** Duplex LC Neutrik OpticalCon Duo connection for the stadium single mode fiber cable (provides fiber X-Net connection from Wireless Press Box Unit to Sideline Trunk)
- E. **REMOTE LAN:** Duplex LC Neutrik OpticalCon Duo connection for the stadium single mode fiber cable (provides fiber LAN connection from Wireless Press Box Unit to Sideline Trunk)
- F. **STADIUM DRY PAIR:** Provides the interface between the copper dry pair stadium wiring and X-System via RJ-14s (4-wire RJ)

Using Fiber with Wireless Press Box (with Dry Pair and Wired Backup)

Use the following steps to set up and connect your press box system to your sideline system via stadium fiber.

1. Make connections as shown below.

Wireless Press Box Unit Rear Panel

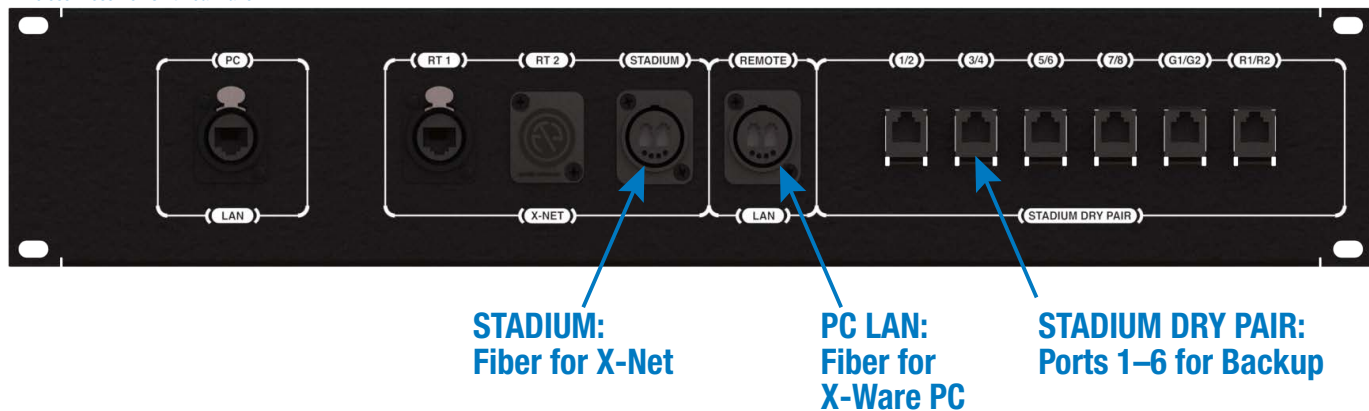

2. Connect your backup wired BeltPacks for all users.
3. Connect AC power, then do the following:
 - A. Power on the wireless press box unit's UPS.
 - B. Power on the sideline Control Units (CUs). Select Home or Away and allow the CCF to load.
 - C. Power on the press box Radio Packs (RPs).

Note: For this workflow, the press box RPs should be paired to the secondary (bottom) sideline CU.

 - D. Power on wired BeltPacks and make sure TALK buttons are off.
 - E. Access each sideline CU's menu (Wired Settings > Intercom Settings) and verify that all 2-Wire ports are set to AudioCom ("A-C").
4. Connect to X-Ware.
 - A. Power on the press box tablet.
 - B. Launch the screen-sharing software to remotely access the sideline PC.
 - C. Launch the sideline X-Ware (if not already running).
5. Perform the dry pair test and auto-null all of the lines from the sideline using X-Ware's Conference view (under the System Settings menu).
6. Test operation of the press box RPs.

After the game, power off and stow away X-System wireless press box components.



Fiber Workflow Reminders:


- Do not turn on the press box CUs.
- RPs should be paired to the secondary (bottom) sideline CU.
- X-Ware access will be a remote connection to the sideline system's X-Ware.

Using Dry Pair with Wireless Press Box (with Wired Backup)

Use the following steps to set up and connect your press box system to your sideline system via dry pair connections.

1. Make connections as shown below.

Wireless Press Box Unit Rear Panel

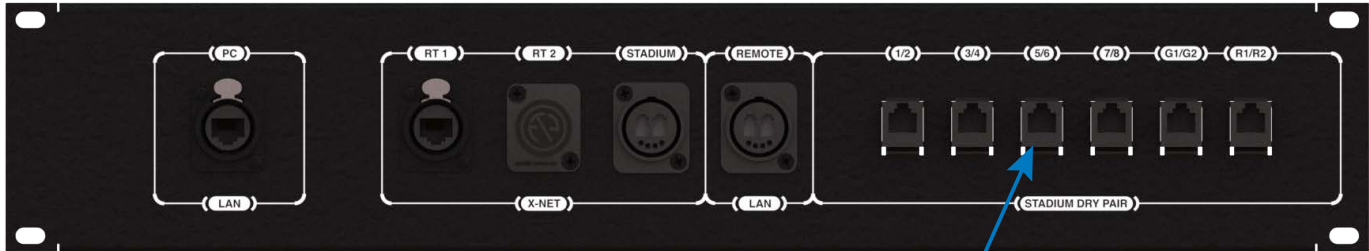

STADIUM DRY PAIR:
Ports 1–6

2. Connect your backup wired BeltPacks for all users.
3. Connect AC power for the wireless press box, then do the following:
 - A. Power on the wireless press box unit's UPS.
 - B. Power on the wireless press box unit's Control Units (CUs). Select Home or Away and allow the CCF to load.
 - C. Power on the press box Radio Packs (RPs).

Note: For this workflow, the press box RPs should be paired to the master (top) press box CU.

- D. Power on wired BeltPacks and make sure TALK buttons are off.
4. Connect to X-Ware.
 - A. Power on the press box tablet.
 - B. Launch the press box X-Ware.

5. Perform the dry pair test and auto-null all of the lines from the press box using X-Ware's Conference view (under the System Settings menu).

IMPORTANT: Do not auto-null the sideline CUs and press box CUs at the same time.

6. Test operation of the press box RPs.
7. After the game, power off and stow away X-System wireless press box components.



Dry Pair Workflow Reminders:

- The press box CUs will be turned on.
- RPs should be paired to the master (top) press box CU.
- X-Ware will control the press box CUs, and it will operate separately from the sideline system's X-Ware.

Notes:



CoachComm LLC
205 Technology Parkway
Auburn, Alabama 36830
1.800.749.2761
www.coachcomm.com

Copyright © 2018–2019 CoachComm LLC. All rights reserved. The Tempest®, Connex®, and SmartBoom® word marks and Tempest® and X-System logos are trademarks of CoachComm LLC. Any and all other trademark references within this document are property of their respective owners.

Document Reference: 2019.06 D0000394_C